

# VIBIA





VIBIA

Recommended sales prices - vat not included this price list updates models and finishes in production, which may differ from photographs published in catalogue

# Index


|                      |                      |                           |                                          |
|----------------------|----------------------|---------------------------|------------------------------------------|
| Africa<br>264        | Flex<br>62           | Origami<br>194            | Top<br>98                                |
| Algorithm Grid<br>64 | Fold Surface<br>188  | Out<br>190                | Tube<br>322                              |
| Algorithm Free<br>76 | Funnel<br>114        | Palma<br>168              | Up<br>192                                |
| Alpha<br>398         | Ghost<br>230         | Palo Alto<br>198          | Vol<br>8                                 |
| Balance<br>236       | Guise<br>124         | Pin<br>106                | Warm<br>224                              |
| Bamboo<br>216        | Halo Circular<br>132 | Plis Outdoor<br>176       | Wind<br>178                              |
| Big<br>54            | Halo Lineal<br>136   | Plusminus<br>336          | Wireflow<br>20                           |
| Big Built-in<br>58   | Halo Jewel<br>140    | Puck<br>238               | Wireflow Chandelier<br>50                |
| Break<br>182         | Halo Wall<br>148     | Puck Wall Art<br>242      | Wireflow Freeform<br>36                  |
| Break Plus<br>184    | I.Cono<br>60         | Quadra Ice<br>94          | Wireflow Lineal<br>32                    |
| Brisa<br>200         | Jazz<br>100          | Rhythm Horizontal<br>118  | 45°<br>404                               |
| Centric<br>280       | Join<br>234          | Rhythm Vertical<br>122    |                                          |
| Class<br>160         | June<br>210          | Scotch<br>92              | Bulbs<br>410                             |
| Cosmos<br>150        | Knit<br>382          | Set<br>392                | Professional<br>area at vibia.com<br>411 |
| Dama<br>164          | Kontur<br>330        | Skan<br>10                | Item coding<br>6                         |
| Domo<br>402          | Match<br>406         | Slim<br>82                | Glossary<br>412                          |
| Dots<br>202          | Mayfair<br>256       | Spa<br>308                | Lighting control<br>systems<br>413       |
| Dots Outdoor<br>206  | Mayfair Mini<br>254  | Sticks Connectable<br>364 |                                          |
| Duo<br>220           | Meridiano<br>208     | Sticks Stand-alone<br>378 |                                          |
| Empty<br>186         | Micro<br>116         | Structural<br>154         |                                          |
| Flamingo<br>102      | Musa<br>380          | Suite<br>314              |                                          |
| Flat<br>294          | North<br>266         | Tempo<br>282              |                                          |

# Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

## ITEM CODING

Reference

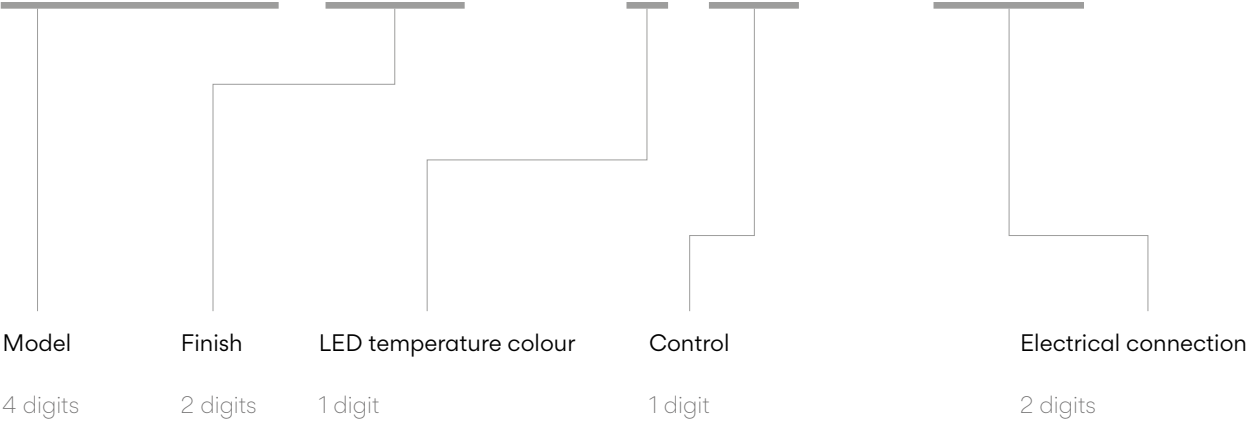

Model

Finish

LED temperature colour

Control

Electrical connection

4 digits

2 digits

1 digit

1 digit

2 digits

Type                      Model

- 0 Without LED
- 1 2700 K
- 2 3000 K
- 3 3500 K
- 4 4000 K
- 7 2200 K

- 0 On/ Off
- 1 DALI
- 2 0-10V
- 3 1-10V
- 4 TRIAC
- 5 Push
- 6 Sensor
- A 1+3+5 (DALI + 1-10V + Push)
- B 3+5 (1-10V + Push)
- C 1+3 (DALI + 1-10V)
- E Casambi P2P + On/ Off
- F Simultaneous line DALI + 1-10V + Push + Casambi
- Z Casambi \*
- M Without driver

- 1 Surface
- 2 Built-in
- 3 Remote
- 4 Bolt Down

- 0 Basic
- 1 Micro
- 2 XXS
- 3 XS
- 4 S
- 5 M
- 6 L
- 8 Free wire
- 9 Mud kit

\* Casambi refers to wireless dimming solutions.  
Ask for more information.

Should you need a non-standard product.  
Please, request sales conditions.

Over the course of this year we shall proceed to standardise  
our finish codes.



# Vol

Design by Lievore, Altherr, Molina

Vol combines traditional techniques and cutting-edge lighting capabilities. Smooth and streamlined, the simple oval forms create a delicate focal point in a space.

## Pendants



ø 45 cm


**0220**



ø 60 cm

**0225**

### 0220



**Finishes**  
● **03 White**  
(RAL 9016)

**LED temperature colour**  
2700 K 800 lm/W

**0220 03**


**Materials**  
Shade: Glass. Disc: Aluminum.  
**Light Source and electronics**  
4 x LED E27 230V 9 W

**Packaging**  
1 Box 0,54 x 0,54 x 0,36 m  
Vol 0,1050 m<sup>3</sup>  
Gross weight 8 Kg Net weight 6,5 Kg

**Notes**  
Extra cable length. **16,00 €/m**



### 0225



**Finishes**  
● **03 White**  
(RAL 9016)

**LED temperature colour**  
2700 K 800 lm/W

**0225 03**

**Materials**  
Shade: Glass. Disc: Aluminum.  
**Light Source and electronics**  
4 x LED E27 230V 9 W

**Packaging**  
1 Box 0,78 x 0,78 x 0,50 m  
Vol 0,3000 m<sup>3</sup>  
Gross weight 11 Kg Net weight 9 Kg

**Notes**  
Extra cable length. **16,00 €/m**








# Skan

Design by Lievore, Altherr, Molina

Minimal volume and maximum lighting functionality. Skan represents a return to what is essential: pure, delicate lines in which the light is the fundamental element while the shape is almost invisible.

## Floor




|                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>0250</div> <div></div> | <div>Finishes</div> <div><div><div></div>10/ _ _ White<br/>(NCS S 0300-N)</div><div><div></div>11/ _ _ Black<br/>(NCS S 8500-N)</div><div><div></div>37/ _ _ Terra Red<br/>(NCS S4040-Y70R)</div></div> <div>Finish customization<br/>(Available options:<br/>Vibia colour palette)</div> <div>Materials</div> <div>Head: Aluminum. Diffuser: Methacrylate.<br/>Base: Zamak.</div> <div>Light Source and electronics</div> <div>1 x LED PLATE 24V 8 W<br/>Constant Voltage 24V<br/>110-240V 50/60Hz</div> | <div>LED temperature colour</div> <div>/2 _ 3000 K<br/>CRI &gt;80 339,2 lm 42,4 lm/W</div> <div>Control</div> <div>0250 _ _ / _ 6<br/>Optical Sensor</div> <div>Packaging</div> <div>1 Box 1,50 x 0,34 x 0,32 m<br/>Vol 0,0418 m³<br/>Gross weight 6 Kg Net weight 3 Kg</div> <div>Notes</div> <div>UNTIL STOCK RUNS OUT</div> <div><div>LED</div><div></div><div>IP20</div><div>CE</div><div>EAC</div><div></div></div> <div><div>Dimmer</div><div>Bi-volt</div></div> |
|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|





## 0260



### Finishes

- 10/ \_ \_ White  
(NCS S 0300-N)
- 11/ \_ \_ Black  
(NCS S 8500-N)
- 37/ \_ \_ Terra Red  
(NCS S4040-Y70R)

Finish customization  
 (Available options:  
 Vibia colour palette)

### LED temperature colour

- /1\_ 2700 K ☐  
CRI >90 4430,16 lm 159 lm/W
- /2\_ 3000 K ☐  
CRI >90 3792,73 lm 136 lm/W
- /3\_ 3500 K ☐  
CRI >90 4799,9 lm 172,0 lm/W

### Control

0260 \_ \_ / \_ 5  
 Push

### Materials

Head: Aluminum. Diffuser: Methacrylate.  
 Vertical tube: Steel.

### Light Source and electronics

3 x LED 9,2 W 500 mA  
 Constant Current 500 mA  
 110~240V 50/60Hz


### Packaging

1 Box 2,11 x 0,60 x 0,60 m  
 Vol 0,7596 m<sup>3</sup>  
 Gross weight 5,4 Kg Net weight 2,5 Kg

LED ☐ IP20 ☐ EAC ☐ ☐  
 Dimmer ☐ Bi-volt ☐


Pendants

0270




ø 30 cm

0271




ø 30 cm

0275

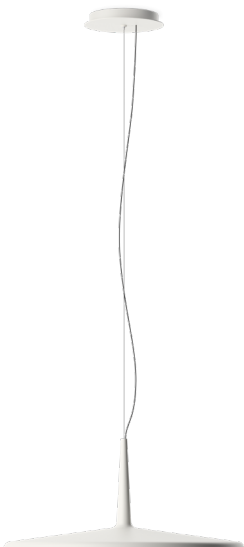


ø 60 cm

0276

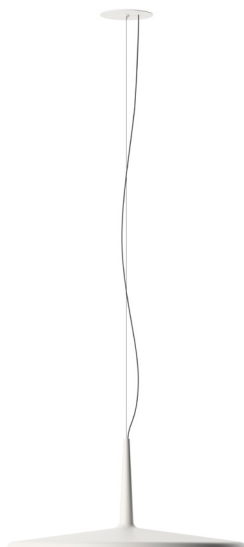

ø 60 cm

0280

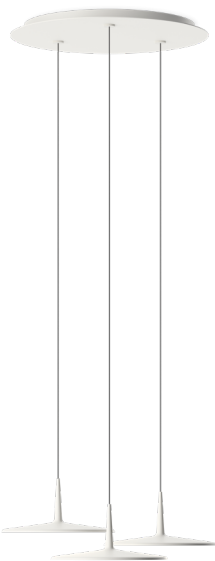


ø 30 cm


0282




ø 30 cm

13

|                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>0275</div>  | <div>Finishes</div> <div><div><div>10/ _ _ White</div><div>(NCS S 0300-N)</div></div><div><div>11/ _ _ Black</div><div>(NCS S 8500-N)</div></div><div><div>24/ _ _ Beige M1</div><div>(NCS S 2005-Y50R)</div></div><div><div>37/ _ _ Terra Red</div><div>(NCS S4040-Y70R)</div></div><div><div>42/ _ _ Blue M1</div><div>(NCS S 1000-N)</div></div><div><div>47/ _ _ Green L1</div><div>(NCS S 4005-G80Y)</div></div></div> <div>Finish customization</div> <div>(Available options:</div> <div>Vibia colour palette)</div> | <div>LED temperature colour</div> <div>/1 _ 2700 K </div> <div>CRI &gt;90 1269 lm 91 lm/W</div> <div>/2 _ 3000 K </div> <div>CRI &gt;80 1575 lm 113 lm/W</div> <div>/3 _ 3500 K </div> <div>CRI &gt;90 1375,3 lm 98,9 lm/W</div>                                                                                           | <div>Control</div> <div>0275 _ _ / _ 1</div> <div>DALI-2</div> <div>0275 _ _ / _ B</div> <div>1-10V, Push</div> <div>0275 _ _ / _ Z</div> <div>Casambi</div> |
|                                                                                                   | <div>Materials</div> <div>Body: Aluminum. Diffuser: Methacrylate.</div> <div>Canopy Plate: Steel.</div> <div>Light Source and electronics</div> <div>1 x LED 13,9 W 500 mA</div> <div>Constant Current 500 mA</div> <div>110~240V 50/60Hz</div>                                                                                                                                                                                                                                                                             | <div>Packaging</div> <div>1 Box 0,42 x 0,71 x 0,66 m</div> <div>Vol 0,2000 m³</div> <div>Gross weight 7 Kg Net weight 4,4 Kg</div> <div>Notes</div> <div>Surface.</div> <div>Extra cable length. 16,00 €/m</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Bi-volt</div></div> |                                                                                                                                                              |

|                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>0276</div>  | <div>Finishes</div> <div><div><div>10/ _ _ White</div><div>(NCS S 0300-N)</div></div><div><div>11/ _ _ Black</div><div>(NCS S 8500-N)</div></div><div><div>24/ _ _ Beige M1</div><div>(NCS S 2005-Y50R)</div></div><div><div>37/ _ _ Terra Red</div><div>(NCS S4040-Y70R)</div></div><div><div>42/ _ _ Blue M1</div><div>(NCS S 1000-N)</div></div><div><div>47/ _ _ Green L1</div><div>(NCS S 4005-G80Y)</div></div></div> <div>Finish customization</div> <div>(Available options:</div> <div>Vibia colour palette)</div> | <div>LED temperature colour</div> <div>/1 _ 2700 K </div> <div>CRI &gt;90 1269 lm 91 lm/W</div> <div>/2 _ 3000 K </div> <div>CRI &gt;80 1575 lm 113 lm/W</div> <div>/3 _ 3500 K </div> <div>CRI &gt;90 1375,3 lm 98,9 lm/W</div>                                                                                                                                                                                            | <div>Control</div> <div>0276 _ _ / _ 1</div> <div>DALI-2</div> <div>0276 _ _ / _ B</div> <div>1-10V, Push</div> <div>0276 _ _ / _ Z</div> <div>Casambi</div> |
|                                                                                                     | <div>Materials</div> <div>Body: Aluminum. Diffuser: Methacrylate.</div> <div>Canopy Plate: Steel.</div> <div>Light Source and electronics</div> <div>1 x LED 13,9 W 500 mA</div> <div>Constant Current 500 mA</div> <div>110~240V 50/60Hz</div>                                                                                                                                                                                                                                                                             | <div>Packaging</div> <div>1 Box 0,42 x 0,71 x 0,66 m</div> <div>Vol 0,2000 m³</div> <div>Gross weight 7 Kg Net weight 4,4 Kg</div> <div>Notes</div> <div>Suitable for built-in and surface fitting.</div> <div>Extra cable length. 16,00 €/m</div> <div>UNTIL STOCK RUNS OUT</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Bi-volt</div><div></div><div>ø 11,5 cm</div></div> |                                                                                                                                                              |

## 0280



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 42/ \_ \_ Blue M1 (NCS S 1000-N)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1 \_ 2700 K CRI >90 3123 lm 112 lm/W
- /2 \_ 3000 K CRI >80 3369 lm 121 lm/W
- /3 \_ 3500 K CRI >90 4124,7 lm 147,8 lm/W

### Control

0280 \_ \_ / \_ 1  
DALI-2

0280 \_ \_ / \_ B  
1-10V, Push

0280 \_ \_ / \_ Z  
Casambi

### Materials

Body: Aluminum. Diffuser: Methacrylate.  
Canopy Plate: Steel.

### Light Source and electronics

3 x LED 9,3 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,2226 m³  
Gross weight 13,7 Kg Net weight 9,2 Kg


### Notes

Surface.

Extra cable length. 16,00 €/m

LED IP20 CE EAC Bi-volt

## 0282



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 42/ \_ \_ Blue M1 (NCS S 1000-N)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1 \_ 2700 K CRI >90 5205 lm 112 lm/W
- /2 \_ 3000 K CRI >80 5615 lm 121 lm/W
- /3 \_ 3500 K CRI >90 6874,5 lm 147,8 lm/W

### Control

0282 \_ \_ / \_ 1  
DALI-2

0282 \_ \_ / \_ B  
1-10V, Push

0282 \_ \_ / \_ Z  
Casambi

### Materials

Body: Aluminum. Diffuser: Methacrylate.  
Canopy Plate: Steel.

### Light Source and electronics

5 x LED 9,3 W 350mA  
Constant Current 350 mA  
110-240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,3290 m³  
Gross weight 36,9 Kg Net weight 29 Kg

### Notes

Surface.


Extra cable length. 16,00 €/m

LED IP20 CE EAC Bi-volt


# Composing pendants

Next sketches are composed by one or more compositions


---

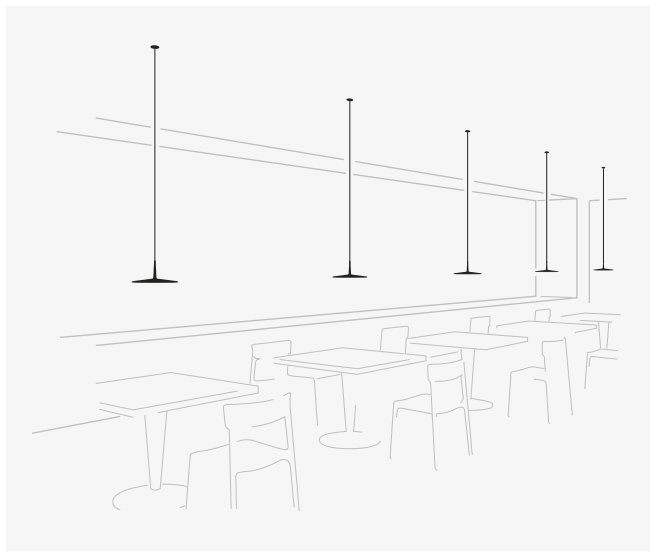

5 x 0270.

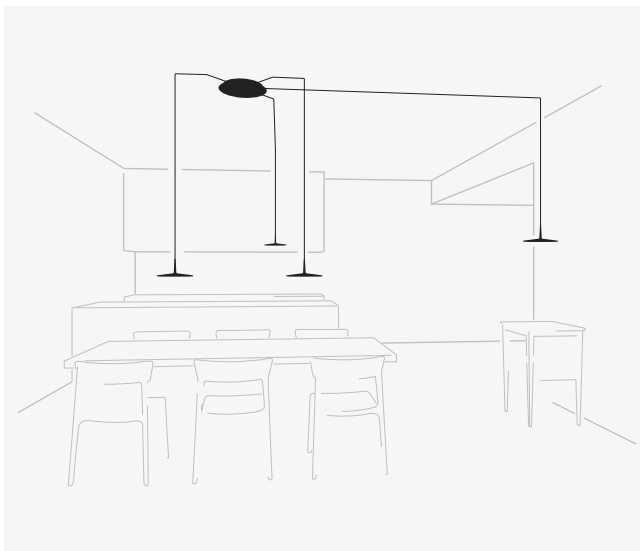

4 x 0270.

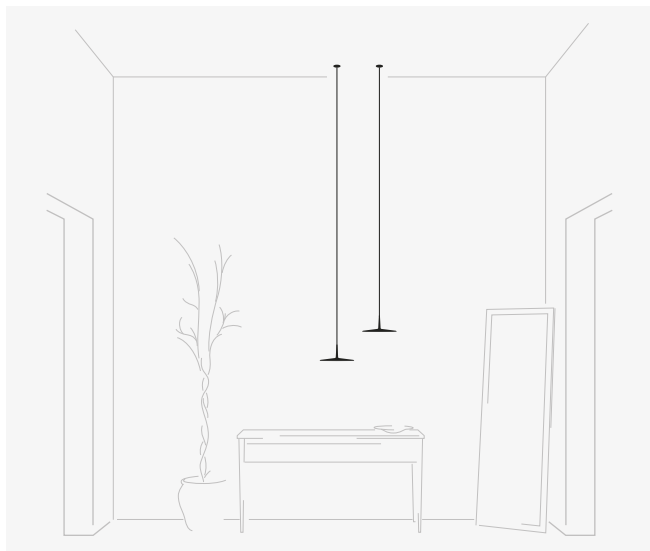

2 x 0270.

Each project is unique.  
Visit [vibia.com](https://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Skan composition quick  
and easy at [vibia.com](https://vibia.com)





# Electrical connection options for model 0270


Choose your preferred installation option according to your needs.  
For each composition, the optimal minimum number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 0270

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.




---

## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 0270


### Surface



ø 17,3 cm  
match with  
fixture finish.




### Free Wire




1 wire

ø 20 cm




2 wires

ø 22 cm



3 - 6 wires



ø 36 cm



7 - 8 wires

ø 40 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.

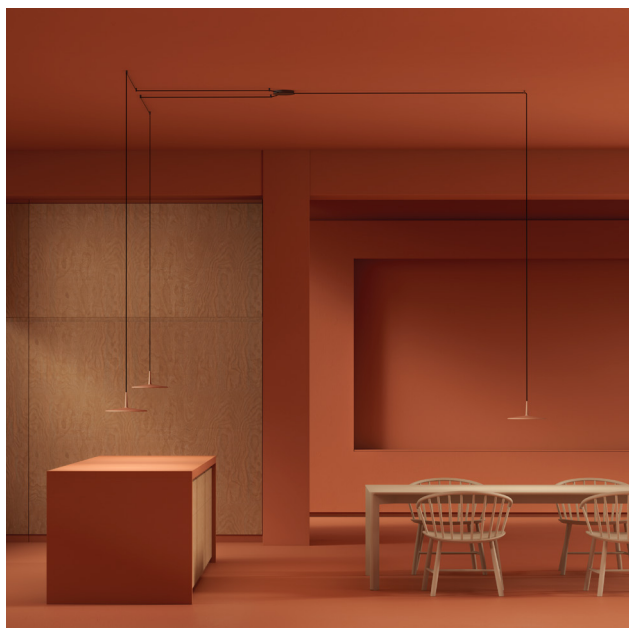

# Wireflow

Design by Arik Levy


Crafted of black, electrical cables, Volumetric's airy, three-dimensional outline lends it the feeling of being at once present and absent. The geometric volumes are tipped with LED light terminals in a contemporary take on the traditional chandelier.

## Pendants




Each project is unique.  
 Visit [vibia.com](http://vibia.com) and  
 chose among multiple  
 compositions designed  
 and adapted to your  
 project needs.


Personalise your own  
 Wireflow composition  
 quick and easy at  
[vibia.com](http://vibia.com)

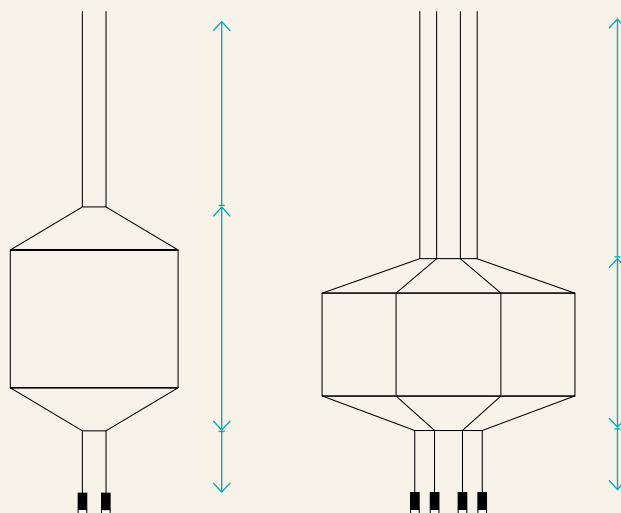

Pressed-glass diffuser.  
 \*Without pressed-glass diffuser.



0299



Finishes  
 ● 04/ \_ \_ Black  
 (RAL 9005)

LED temperature colour  
 /1 \_ 2700 K   
 CRI >90 3880 lm 121 lm/W  
 /2 \_ 3000 K   
 CRI >90 3880 lm 121 lm/W  
 /3 \_ 3500 K   
 CRI >90 4002,4 lm 125,1 lm/W

Control  
 0299 \_ \_ / \_ A  
 DALI-2, 1-10V, Push  
 0299 \_ \_ / \_ Z  
 Casambi

Materials  
 Diffuser: Pressed-glass. Horizontal rods: Steel.  
 Body: Aluminum Canopy: Steel.


Light Source and electronics  
 8 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110~240V 50/60Hz

Packaging  
 2 Boxes  
 Total Vol 0,3245 m³  
 Gross weight 20,6 Kg Net weight 9,6 Kg

Notes  
 Pressed-glass diffuser.  
 Configuration layout at [vibia.com](http://vibia.com)  
 Min. quantity, upcharge and extra  
 lead time apply

LED IP20 CE EAC Bi-volt

## 0300



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K   
CRI >90 3880 lm 121 lm/W
- /2** \_ 3000 K   
CRI >90 3880 lm 121 lm/W
- /3** \_ 3500 K   
CRI >90 4002,4 lm 125,1 lm/W

## Control

**0300** \_ \_ / \_ A  
DALI-2, 1-10V, Push

**0300** \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,3246 m³  
Gross weight 19,95 Kg Net weight 8,95 Kg


## Notes

Pressed-glass diffuser.

## Configuration layout at vibia.com

Min. quantity, upcharge and extra  
lead time apply

## 0301



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K   
CRI >90 3880 lm 121 lm/W
- /2** \_ 3000 K   
CRI >90 3880 lm 121 lm/W
- /3** \_ 3500 K   
CRI >90 4002,4 lm 125,1 lm/W

## Control

**0301** \_ \_ / \_ A  
DALI-2, 1-10V, Push

**0301** \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,2100 m³  
Gross weight 17,75 Kg Net weight 8,75 Kg


## Notes

Pressed-glass diffuser.

## Configuration layout at vibia.com

Min. quantity, upcharge and extra  
lead time apply.

## 0302



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K   
CRI >90 3880 lm 121 lm/W
- /2** \_ 3000 K   
CRI >90 3880 lm 121 lm/W
- /3** \_ 3500 K   
CRI >90 4002,4 lm 125,1 lm/W

## Control

**0302** \_ \_ / \_ A  
DALI-2, 1-10V, Push

**0302** \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,1558 m³  
Gross weight 14,6 Kg Net weight 8,6 Kg


## Notes

Pressed-glass diffuser.

## Configuration layout at vibia.com

Min. quantity, upcharge and extra  
lead time apply.

### 0303



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 3880 lm 121 lm/W  
/2 \_ 3000 K CRI >90 3880 lm 121 lm/W  
/3 \_ 3500 K CRI >90 4002,4 lm 125,1 lm/W

**Control**  
0303 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0303 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

**Light Source and electronics**  
8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz


**Packaging**  
2 Boxes  
Total Vol 0,1558 m³  
Gross weight 13 Kg Net weight 8,5 Kg

**Notes**  
Pressed-glass diffuser.

**Configuration layout at vibia.com**  
Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

### 0304



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 2910 lm 121 lm/W  
/2 \_ 3000 K CRI >90 2910 lm 121 lm/W  
/3 \_ 3500 K CRI >90 3001,8 lm 125,1 lm/W

**Control**  
0304 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0304 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

**Light Source and electronics**  
6 x LED 4,5W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz


**Packaging**  
2 Boxes  
Total Vol 0,3245 m³  
Gross weight 15,55 Kg Net weight 5,65 Kg

**Notes**  
Pressed-glass diffuser.

**Configuration layout at vibia.com**  
Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

### 0305



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 2910 lm 121 lm/W  
/2 \_ 3000 K CRI >90 2910 lm 121 lm/W  
/3 \_ 3500 K CRI >90 3001,8 lm 125,1 lm/W

**Control**  
0305 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0305 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

**Light Source and electronics**  
6 x LED 4,5W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz


**Packaging**  
2 Boxes  
Total Vol 0,2100 m³  
Gross weight 13,2 Kg Net weight 3,5 Kg

**Notes**  
Pressed-glass diffuser.

**Configuration layout at vibia.com**  
Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

## 0306



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K **D**   
CRI >90 2910 lm 121 lm/W
- /2** \_ 3000 K **E**   
CRI >90 2910 lm 121 lm/W
- /3** \_ 3500 K **E**   
CRI >90 3001,8 lm 125,1 lm/W

## Control

**0306** \_ / \_ A  
DALI-2, 1-10V, Push

**0306** \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

6 x LED 4,5W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,2100 m³  
Gross weight 13,1 Kg Net weight 5,2 Kg

## Notes


Pressed-glass diffuser.

Configuration layout at [vibia.com](http://vibia.com)

Min. quantity, upcharge and extra lead time apply.



## 0307



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K **D**   
CRI >90 2910 lm 121 lm/W
- /2** \_ 3000 K **E**   
CRI >90 2910 lm 121 lm/W
- /3** \_ 3500 K **E**   
CRI >90 3001,8 lm 125,1 lm/W

## Control

**0307** \_ / \_ A  
DALI-2, 1-10V, Push

**0307** \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

6 x LED 4,5W 350mA  
Constant Current 350 mA  
110~240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,1558 m³  
Gross weight 10 Kg Net weight 5,1 Kg

## Notes


Pressed-glass diffuser.

Configuration layout at [vibia.com](http://vibia.com)

Min. quantity, upcharge and extra lead time apply.



## 0308



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K **D**   
CRI >90 2910 lm 121 lm/W
- /2** \_ 3000 K **E**   
CRI >90 2910 lm 121 lm/W
- /3** \_ 3500 K **E**   
CRI >90 3001,8 lm 125,1 lm/W

## Control

**0308** \_ / \_ A  
DALI-2, 1-10V, Push

**0308** \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

6 x LED 4,5W 350mA  
Constant Current 350 mA  
110~240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,1238 m³  
Gross weight 8,4 Kg Net weight 5 Kg

## Notes

Pressed-glass diffuser.


Configuration layout at [vibia.com](http://vibia.com)

Min. quantity, upcharge and extra lead time apply.





## 0309



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 1940 lm 121 lm/W  
/2 \_ 3000 K CRI >90 1940 lm 121 lm/W  
/3 \_ 3500 K CRI >90 2001,2 lm 125,1 lm/W

**Control**  
0309 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0309 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

### Light Source and electronics

4 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,2100 m³  
Gross weight 12,3 Kg Net weight 5,3 Kg

### Notes


Pressed-glass diffuser.

### Configuration layout at vibia.com

Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

## 0310



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 1940 lm 121 lm/W  
/2 \_ 3000 K CRI >90 1940 lm 121 lm/W  
/3 \_ 3500 K CRI >90 2001,2 lm 125,1 lm/W

**Control**  
0310 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0310 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

### Light Source and electronics

4 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,2100 m³  
Gross weight 11,8 Kg Net weight 4,8 Kg

### Notes


Pressed-glass diffuser.

### Configuration layout at vibia.com

Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

## 0311



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 1940 lm 121 lm/W  
/2 \_ 3000 K CRI >90 1940 lm 121 lm/W  
/3 \_ 3500 K CRI >90 2001,2 lm 125,1 lm/W

**Control**  
0311 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0311 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

### Light Source and electronics

4 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,1558 m³  
Gross weight 8,7 Kg Net weight 4,7 Kg

### Notes


Pressed-glass diffuser.

### Configuration layout at vibia.com

Min. quantity, upcharge and extra lead time apply.

LED IP20 CE EAC Bi-volt

## 0312



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K   
CRI >90 1940 lm 121 lm/W  
**/2** \_ 3000 K   
CRI >90 1940 lm 121 lm/W  
**/3** \_ 3500 K   
CRI >90 2001,2 lm 125,1 lm/W

## Control

**0312** \_ \_ / \_ A  
DALI-2, 1-10V, Push

**0312** \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,1558 m³  
Gross weight 8,6 Kg Net weight 4,6 Kg

## Notes


Pressed-glass diffuser.

**Configuration layout at vibia.com**

Min. quantity, upcharge and extra lead time apply



## 0313



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K   
CRI >80 1961 lm 109 lm/W

## Control

**0313** \_ \_ / \_ A  
DALI-2, 1-10V, Push

**0313** \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

4 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,1238 m³  
Gross weight 7 Kg Net weight 4,5 Kg

## Notes


Pressed-glass diffuser.

**Configuration layout at vibia.com**

Min. quantity, upcharge and extra lead time apply



## 0399



## Finishes

- **04/** \_ \_ Black  
(RAL 9005)

## LED temperature colour

- /1** \_ 2700 K   
CRI >90 3880 lm 121 lm/W

## Control

**0399** \_ \_ / \_ A  
DALI-2, 1-10V, Push

**0399** \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

## Light Source and electronics

8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,3245 m³  
Gross weight 20,6 Kg Net weight 9,6 Kg

## Notes


Without pressed-glass diffuser.

**Configuration layout at vibia.com**

Min. quantity, upcharge and extra lead time apply



## 0400



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 3880 lm 121 lm/W

**Control**  
0400 \_ / \_ A  
DALI-2, 1-10V, Push

0400 \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.


**Light Source and electronics**  
8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,3245 m³  
Gross weight 20,20 Kg Net weight 8,95 Kg

**Notes**  
Without pressed-glass diffuser.  
**Configuration layout at vibia.com**  
Min. quantity, upcharge and extra  
lead time apply

LED IP20 Bi-volt

## 0401



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 3880 lm 121 lm/W

**Control**  
0401 \_ / \_ A  
DALI-2, 1-10V, Push

0401 \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.


**Light Source and electronics**  
8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,2100 m³  
Gross weight 17,75 Kg Net weight 8,75 Kg

**Notes**  
Without pressed-glass diffuser.  
**Configuration layout at vibia.com**  
Min. quantity, upcharge and extra  
lead time apply

LED IP20 Bi-volt

## 0402



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 3880 lm 121 lm/W

**Control**  
0402 \_ / \_ A  
DALI-2, 1-10V, Push

0402 \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

**Light Source and electronics**  
8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz


**Packaging**  
2 Boxes  
Total Vol 0,1558 m³  
Gross weight 16,95 Kg Net weight 8,6 Kg

**Notes**  
Without pressed-glass diffuser.  
**Configuration layout at vibia.com**  
Min. quantity, upcharge and extra  
lead time apply

LED IP20 Bi-volt

|      |  |                                                                                   |                                        |                                                                                                                                                                 |
|------|--|-----------------------------------------------------------------------------------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0403 |  | Finishes                                                                          | LED temperature colour                 | Control                                                                                                                                                         |
|      |  | ● 04/ _ _ Black<br>(RAL 9005)                                                     | /1_ 2700 K<br>CRI >90 3880 lm 121 lm/W | 0403 _ / _ A<br>DALI-2, 1-10V, Push<br><br>0403 _ / _ Z<br>Casambi                                                                                              |
|      |  | Materials                                                                         |                                        | Packaging                                                                                                                                                       |
|      |  | Diffuser: Polycarbonate. Horizontal rods: Steel.<br>Body: Aluminum Canopy: Steel. |                                        | 2 Boxes<br>Total Vol 0,1558 m³<br>Gross weight 16,65 Kg Net weight 8,5 Kg                                                                                       |
|      |  | Light Source and electronics                                                      |                                        | Notes                                                                                                                                                           |
|      |  | 4 x LED 4,5 W 350 mA<br>Constant Current 350 mA<br>110~240V 50/60Hz               |                                        | Without pressed-glass diffuser.<br><b>Configuration layout at <a href="http://vibia.com">vibia.com</a></b><br>Min. quantity, upcharge and extra lead time apply |
|      |  |                                                                                   |                                        |                                                                                                                                                                 |
| 0404 |  | Finishes                                                                          | LED temperature colour                 | Control                                                                                                                                                         |
|      |  | ● 04/ _ _ Black<br>(RAL 9005)                                                     | /1_ 2700 K<br>CRI >90 2910 lm 121 lm/W | 0404 _ / _ A<br>DALI-2, 1-10V, Push<br><br>0404 _ / _ Z<br>Casambi                                                                                              |
|      |  | Materials                                                                         |                                        | Packaging                                                                                                                                                       |
|      |  | Diffuser: Polycarbonate. Horizontal rods: Steel.<br>Body: Aluminum Canopy: Steel. |                                        | 2 Boxes<br>Total Vol 0,3245 m³<br>Gross weight 15,55 Kg Net weight 5,65 Kg                                                                                      |
|      |  | Light Source and electronics                                                      |                                        | Notes                                                                                                                                                           |
|      |  | 6 x LED 4,5 W 350 mA<br>Constant Current 350 mA<br>110~240V 50/60Hz               |                                        | Without pressed-glass diffuser.<br><b>Configuration layout at <a href="http://vibia.com">vibia.com</a></b><br>Min. quantity, upcharge and extra lead time apply |
|      |  |                                                                                   |                                        |                                                                                                                                                                 |
| 0405 |  | Finishes                                                                          | LED temperature colour                 | Control                                                                                                                                                         |
|      |  | ● 04/ _ _ Black<br>(RAL 9005)                                                     | /1_ 2700 K<br>CRI >90 2910 lm 121 lm/W | 0405 _ / _ A<br>DALI-2, 1-10V, Push<br><br>0405 _ / _ Z<br>Casambi                                                                                              |
|      |  | Materials                                                                         |                                        | Packaging                                                                                                                                                       |
|      |  | Diffuser: Polycarbonate. Horizontal rods: Steel.<br>Body: Aluminum Canopy: Steel. |                                        | 2 Boxes<br>Total Vol 0,3245 m³<br>Gross weight 15,55 Kg Net weight 5,65 Kg                                                                                      |
|      |  | Light Source and electronics                                                      |                                        | Notes                                                                                                                                                           |
|      |  | 6 x LED 4,5 W 350 mA<br>Constant Current 350 mA<br>110~240V 50/60Hz               |                                        | Without pressed-glass diffuser.<br><b>Configuration layout at <a href="http://vibia.com">vibia.com</a></b><br>Min. quantity, upcharge and extra lead time apply |
|      |  |                                                                                   |                                        |                                                                                                                                                                 |

## 0406



**Finishes**  
 ● 04/ \_ \_ Black (RAL 9005)

**LED temperature colour**  
 /1\_ 2700 K CRI >90 2910 lm 121 lm/W

**Control**  
 0406 \_ \_ / \_ A  
 DALI-2, 1-10V, Push

0406 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Polycarbonate. Horizontal rods: Steel.  
 Body: Aluminum Canopy: Steel.


**Light Source and electronics**  
 6 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,2100 m³  
 Gross weight 13,1 Kg Net weight 5,2 Kg

**Notes**  
 Without pressed-glass diffuser.  
**Configuration layout at vibia.com**  
 Min. quantity, upcharge and extra lead time apply

LED IP20 Bi-volt

## 0407



**Finishes**  
 ● 04/ \_ \_ Black (RAL 9005)

**LED temperature colour**  
 /1\_ 2700 K CRI >90 2910 lm 121 lm/W

**Control**  
 0407 \_ \_ / \_ A  
 DALI-2, 1-10V, Push

0407 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Polycarbonate. Horizontal rods: Steel.  
 Body: Aluminum Canopy: Steel.


**Light Source and electronics**  
 6 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110~240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,1558 m³  
 Gross weight 10 Kg Net weight 5,1 Kg

**Notes**  
 Without pressed-glass diffuser.  
**Configuration layout at vibia.com**  
 Min. quantity, upcharge and extra lead time apply

LED IP20 Bi-volt

## 0408



**Finishes**  
 ● 04/ \_ \_ Black (RAL 9005)

**LED temperature colour**  
 /1\_ 2700 K CRI >90 2910 lm 121 lm/W

**Control**  
 0408 \_ \_ / \_ A  
 DALI-2, 1-10V, Push

0408 \_ \_ / \_ Z  
 Casambi




**Materials**  
 Diffuser: Polycarbonate. Horizontal rods: Steel.  
 Body: Aluminum Canopy: Steel.

**Light Source and electronics**  
 6 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110~240V 50/60Hz


**Packaging**  
 2 Boxes  
 Total Vol 0,1238 m³  
 Gross weight 8,4 Kg Net weight 5 Kg

**Notes**  
 Without pressed-glass diffuser.  
**Configuration layout at vibia.com**  
 Min. quantity, upcharge and extra lead time apply

LED IP20 Bi-volt

|      |                                                                                     |                               |                                                                                                                             |                                                                    |
|------|-------------------------------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| 0409 |    | Finishes                      | LED temperature colour                                                                                                      | Control                                                            |
|      |                                                                                     | ● 04/ _ _ Black<br>(RAL 9005) | /1 _ 2700 K <br>CRI >90 1940 lm 121 lm/W   | 0409 _ _ / _ A<br>DALI-2, 1-10V, Push<br>0409 _ _ / _ Z<br>Casambi |
| 0410 |   | Finishes                      | LED temperature colour                                                                                                      | Control                                                            |
|      |                                                                                     | ● 04/ _ _ Black<br>(RAL 9005) | /1 _ 2700 K <br>CRI >90 1940 lm 121 lm/W   | 0410 _ _ / _ A<br>DALI-2, 1-10V, Push<br>0410 _ _ / _ Z<br>Casambi |
| 0411 |  | Finishes                      | LED temperature colour                                                                                                      | Control                                                            |
|      |                                                                                     | ● 04/ _ _ Black<br>(RAL 9005) | /1 _ 2700 K <br>CRI >90 1940 lm 121 lm/W | 0411 _ _ / _ A<br>DALI-2, 1-10V, Push<br>0411 _ _ / _ Z<br>Casambi |

## 0412



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 1940 lm 121 lm/W

**Control**  
0412 \_ \_ / \_ A  
DALI-2, 1-10V, Push  
0412 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

**Light Source and electronics**  
4 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz


**Packaging**  
2 Boxes  
Total Vol 0,1558 m³  
Gross weight 11,2 Kg Net weight 4,6 Kg

**Notes**  
Without pressed-glass diffuser.

**Configuration layout at vibia.com**  
Min. quantity, upcharge and extra  
lead time apply

LED IP20 CE EAC Bi-volt

## 0413



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 1940 lm 121 lm/W

**Control**  
0413 \_ \_ / \_ A  
DALI-2, 1-10V, Push  
0413 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum Canopy: Steel.

**Light Source and electronics**  
4 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,1238 m³  
Gross weight 7 Kg Net weight 4,5 Kg

**Notes**  
Without pressed-glass diffuser.

**Configuration layout at vibia.com**  
Min. quantity, upcharge and extra  
lead time apply

LED IP20 CE EAC Bi-volt



# Wireflow Lineal


Design by Arik Levy

Crafted of black, electrical cables and lacquered metal rods, Linear traces an airy, two-dimensional outline that lends it a powerful graphic presence. The slim cables are tipped with LED terminals and can be customised.

## Pendants


**0320**

57 cm




**0325**

155 cm

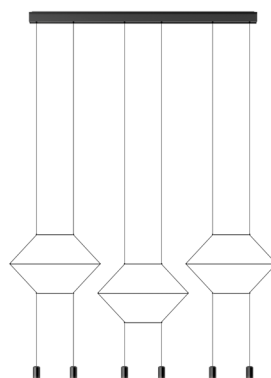


**0330**

275 cm

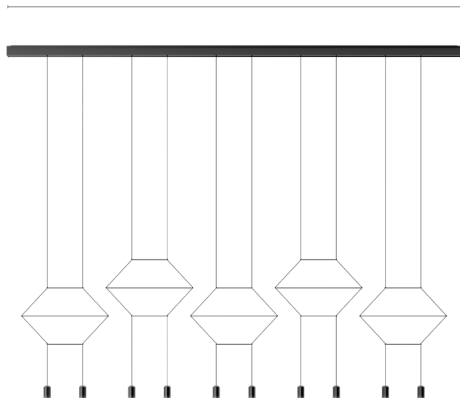


**0332**

275 cm

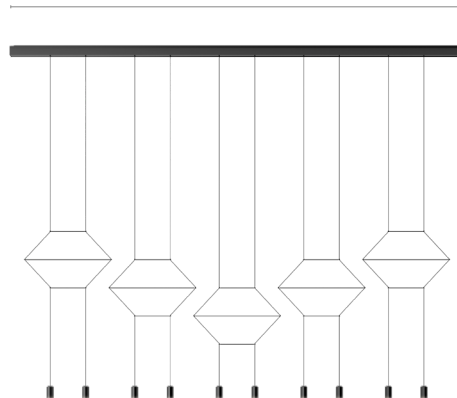


**0338**

145 cm

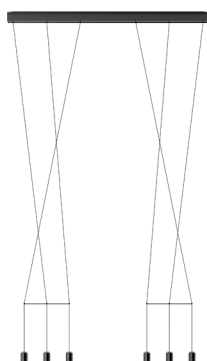

**0340**

205 cm

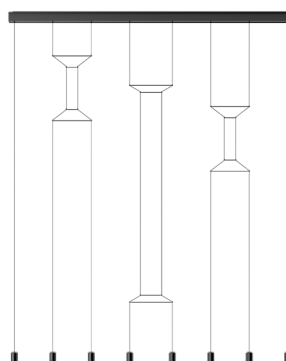




Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Wireflow composition  
quick and easy at  
[vibia.com](http://vibia.com)



Without pressed-glass diffuser.

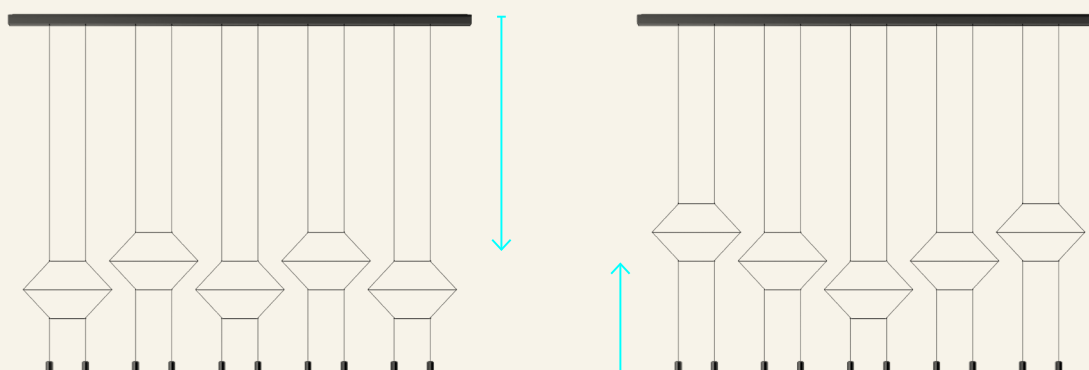

## 0320

**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

### LED temperature colour


- /1\_ 2700 K **D**  
CRI >90 970 lm 121 lm/W
- /2\_ 3000 K **E**  
CRI >90 970 lm 121 lm/W
- /3\_ 3500 K **E**  
CRI >90 1000,6 lm 125,1 lm/W

### Control

**0320** \_ \_ / \_ 1  
DALI

**0320** \_ \_ / \_ B  
1-10V, Push

**0320** \_ \_ / \_ Z  
Casambi



### Materials

Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum. Canopy: Aluminum.

### Light Source and electronics

2 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

1 Box 0,20 x 0,075 x 0,70 m  
Vol 0,0150 m³  
Gross weight 5,1 Kg Net weight 2,6 Kg

### Notes

Linear canopy

LED IP20 CE EAC Bi-volt

● 04/ \_\_ Black  
(RAL 9005)

/1\_ 2700 K **D**  
CRI >90 2910 lm 121 lm/W

/2\_ 3000 K **E**  
CRI >90 2910 lm 121 lm/W

/3\_ 3500 K **E**  
CRI >90 3001.8 lm 125.1 lm/W

0325 \_\_ / \_\_ 1  
DALI

0325 \_\_ / \_\_ B  
1-10V, Push

0325 \_\_ / \_\_ Z  
Gagambi

Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum. Canopy: Aluminum.

6 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

1 Box 0,20 x 0,075 x 2,30 m  
Vol 0,0345 m<sup>3</sup>  
Gross weight 8 Kg Net weight 4,5 Kg

Linear canopy

LED  IP20  EAC  Bi-volt

Diagram of a decorative hanging lamp. The lamp consists of five diamond-shaped shades hanging from a horizontal bar. The total width of the lamp is 275 cm. The height from the ceiling to the top of the shades is 121 cm. The height of the shades is 40 cm.

● 04/ \_\_ Black  
(RAL 9005)

/1\_ 2700 K **D**  
CRI >90 4850 lm 121 lm/W

/2\_ 3000 K **E**  
CRI >90 4850 lm 121 lm/W

/3\_ 3500 K **E**  
CRI >90 5003,0 lm 125,1 lm/W

0330 \_\_ / \_\_ 1  
DALI

0330 \_\_ / \_\_ B  
1-10V. Push

0330 \_\_ / \_\_ Z  
Casambi

Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum. Canopy: Aluminum.

10 x LED 4,5 W 700 mA  
Constant Current 350 mA  
220~240V 50/60Hz

1 Box 0,20 x 0,075 x 3,30 m  
Vol 0,0495 m<sup>3</sup>  
Gross weight 9,5 Kg Net weight 5,0 Kg

Linear canopy

LED  IP20  EAC 

● 04/ \_\_ Black  
(RAL 9005)

LED temperature colour  
/1\_ 2700 K   
CRI >80 4902.7 lm 109 lm/W

0332 \_\_ / \_\_ 1  
DALI

0332 \_ \_ / \_ B  
1-10V, Push

0332 \_\_ / \_\_ Z  
Casambi

Diffuser: Polycarbonate. Horizontal rods: Steel.  
Body: Aluminum. Canopy: Aluminum.


10 x LED 4,5 W 700 mA  
Constant Current 350 mA  
220~240V 50/60Hz

1 Box 0,20 x 0,075 x 3,30 m  
Vol 0,0345 m<sup>3</sup>  
Gross weight 9,2 Kg Net weight 8,3 Kg

Linear canopy

LED  IP20  EAC 

## 0338



**Finishes**  
 ● 04/ \_ \_ Black  
 (RAL 9005)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 2910 lm 121 lm/W  
 /3 \_ 3500 K   
 CRI >90 3001,8 lm 125,1 lm/W

**Control**  
 0338 \_ \_ / \_ 1  
 DALI

0338 \_ \_ / \_ B  
 1-10V, Push

0338 \_ \_ / \_ Z  
 Casambi


**Materials**  
 Diffuser: Polycarbonate. Horizontal rods: Steel.  
 Body: Aluminum. Canopy: Aluminum.

**Light Source and electronics**  
 6 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 110~240V 50/60Hz

**Packaging**  
 1 Box 0,20 x 0,075 x 3,30 m  
 Vol 0,0495 m³  
 Gross weight 9,5 Kg Net weight 5,0 Kg

**Notes**  
 Linear canopy

## 0340



**Finishes**  
 ● 04/ \_ \_ Black  
 (RAL 9005)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 3922 lm 109 lm/W

**Control**  
 0340 \_ \_ / \_ 1  
 DALI

0340 \_ \_ / \_ B  
 1-10V, Push

0340 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Polycarbonate. Horizontal rods: Steel.  
 Body: Aluminum. Canopy: Aluminum.

**Light Source and electronics**  
 8 x LED 4,5 W 700 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz

**Packaging**  
 1 Box 0,20 x 0,075 x 2,30 m  
 Vol 0,0345 m³  
 Gross weight 10,2 Kg Net weight 9,3 Kg

**Notes**  
 Linear canopy




# Wireflow FreeForm

Design by Arik Levy

Crafted of lean, electrical cables that trace airy, geometric outlines, Free Form is equal parts light and fluidity. The customisable fixture features endlessly adjustable shapes and heights, LED light points, and a wall or ceiling canopy to suit any space.

---

## Pendants


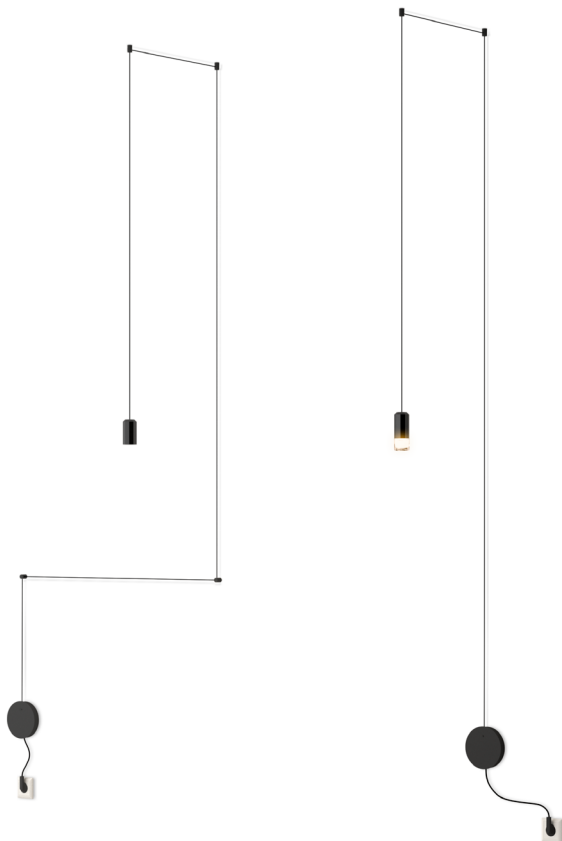


Each project is unique. Visit [vibia.com](http://vibia.com) and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Wireflow composition quick and easy at [vibia.com](http://vibia.com)



Pressed-glass diffuser.  
\*Without pressed-glass diffuser.

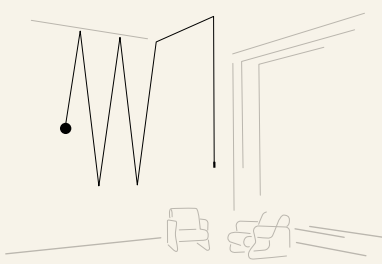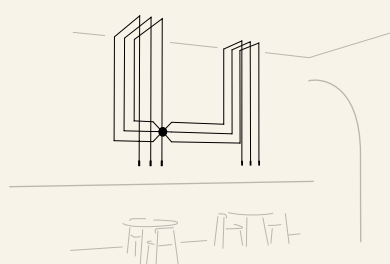

## 0345

Finishes  
● 04/ \_ \_ Black  
(RAL 9005)

LED temperature colour  
/1 \_ 2700 K   
CRI >90 485 lm 121 lm/W  
/2 \_ 3000 K   
CRI >90 485 lm 121 lm/W  
/3 \_ 3500 K   
CRI >90 500,3 lm 125,1 lm/W

Control  
0345 \_ \_ / \_ 1  
DALI-2  
0345 \_ \_ / \_ B  
1-10V, Push  
0345 \_ \_ / \_ Z  
Casambi


Materials  
Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.

Light Source and electronics  
1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100-240V 50/60Hz


Packaging  
1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes  
Pressed-glass diffuser.  
Extra cable length. 16,00 €/m

Electrical connection  
Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings



0347



## Finishes

● 04/ \_ \_ Black  
(RAL 9005)

## LED temperature colour

/1\_ 2700 K   
CRI >80 490 lm 109 lm/W

## Control

0347 \_ \_ / \_ 5  
Push

## Materials

Diffuser: Polycarbonate. Body: Aluminum.  
Canopy: Steel.

## Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

## Packaging


1 Box 0,13 x 0,20 x 0,20 m  
Vol 0,0055 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 1,35 Kg

## Notes

Electric cable 2,5 m. With plug.  
Dimmer push button on the wall plate.  
Without pressed-glass diffuser.

     Bi-volt

0348



## Finishes

● 04/ \_ \_ Black  
(RAL 9005)

## LED temperature colour

/1\_ 2700 K   
CRI >80 490 lm 109 lm/W

## Control

0348 \_ \_ / \_ 5  
Push

## Materials

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.

## Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

## Packaging


1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0175 m<sup>3</sup>  
Gross weight 1,9 Kg Net weight 1,71 Kg

## Notes

Electric cable 2,5 m. With plug.  
Dimmer push button on the wall plate.  
Without pressed-glass diffuser.

     Bi-volt

0349



## Finishes

● 04/ \_ \_ Black  
(RAL 9005)

## LED temperature colour

/1\_ 2700 K   
CRI >90 970 lm 121 lm/W  
/2\_ 3000 K   
CRI >90 970 lm 121 lm/W  
/3\_ 3500 K   
CRI >90 1000,6 lm 125,1 lm/W

## Control

0349 \_ \_ / \_ A  
DALI-2, 1-10V, Push  
0349 \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.

## Light Source and electronics

2 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

## Packaging


1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m<sup>3</sup>  
Gross weight 4,6 Kg Net weight 4,14 Kg

## Notes

Pressed-glass diffuser

     Bi-volt

## 0350



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 1455 lm 121 lm/W  
/2 \_ 3000 K CRI >90 1455 lm 121 lm/W  
/3 \_ 3500 K CRI >90 1500,9 lm 125,1 lm/W

**Control**  
0350 \_ \_ / \_ A  
DALI-2, 1-10V, Push  
0350 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.


**Light Source and electronics**  
3 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m³  
Gross weight 5,2 Kg Net weight 4,68 Kg

**Notes**  
Pressed-glass diffuser.

LED IP20 CE EAC Bi-volt

## 0351



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 1940 lm 121 lm/W  
/2 \_ 3000 K CRI >90 1940 lm 121 lm/W  
/3 \_ 3500 K CRI >90 2001,2 lm 125,1 lm/W

**Control**  
0351 \_ \_ / \_ A  
DALI, 1-10V, Push  
0351 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.


**Light Source and electronics**  
4 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m³  
Gross weight 5,6 Kg Net weight 5,04 Kg

**Notes**  
Pressed-glass diffuser.

LED IP20 CE EAC Bi-volt

## 0353



**Finishes**  
● 04/ \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >90 2425 lm 121 lm/W  
/2 \_ 3000 K CRI >90 2425 lm 121 lm/W  
/3 \_ 3500 K CRI >90 2501,5 lm 125,1 lm/W

**Control**  
0353 \_ \_ / \_ A  
DALI, 1-10V, Push  
0353 \_ \_ / \_ Z  
Casambi


**Materials**  
Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.

**Light Source and electronics**  
5 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m³  
Gross weight 6,1 Kg Net weight 5,49 Kg

**Notes**  
Pressed-glass diffuser.

LED IP20 CE EAC Bi-volt

**0355****Finishes**

- **04/** \_ \_ Black  
(RAL 9005)

**LED temperature colour**

- /1** \_ 2700 K   
CRI >90 2910 lm 121 lm/W
- /2** \_ 3000 K   
CRI >90 2910 lm 121 lm/W
- /3** \_ 3500 K   
CRI >90 3001,8 lm 125,1 lm/W

**Control**

**0355** \_ \_ / \_ A  
DALI, 1-10V, Push

**0355** \_ \_ / \_ Z  
Casambi

**Materials**

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.

**Light Source and electronics**


6 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**

1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m³  
Gross weight 6,7 Kg Net weight 6,03 Kg

**Notes**

Pressed-glass diffuser.

**0356****Finishes**

- **04/** \_ \_ Black  
(RAL 9005)

**LED temperature colour**

- /1** \_ 2700 K   
CRI >90 3395 lm 121 lm/W
- /2** \_ 3000 K   
CRI >90 3395 lm 121 lm/W
- /3** \_ 3500 K   
CRI >90 3502,1 lm 125,1 lm/W

**Control**

**0356** \_ \_ / \_ A  
DALI, 1-10V, Push

**0356** \_ \_ / \_ Z  
Casambi

**Materials**

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.

**Light Source and electronics**


7 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**

1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m³  
Gross weight 7,9 Kg Net weight 7,11 Kg

**Notes**

Pressed-glass diffuser.

**0358****Finishes**

- **04/** \_ \_ Black  
(RAL 9005)

**LED temperature colour**

- /1** \_ 2700 K   
CRI >90 3880 lm 121 lm/W
- /2** \_ 3000 K   
CRI >90 3880 lm 121 lm/W
- /3** \_ 3500 K   
CRI >90 4002,4 lm 125,1 lm/W

**Control**

**0358** \_ \_ / \_ A  
DALI, 1-10V, Push

**0358** \_ \_ / \_ Z  
Casambi

**Materials**

Diffuser: Pressed-glass. Body: Aluminum.  
Canopy: Steel.

**Light Source and electronics**

8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**


1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m³  
Gross weight 8,4 Kg Net weight 7,56 Kg

**Notes**

Pressed-glass diffuser.




## 0360



|                                                                                                   |                                                                                                                                    |                                                                           |
|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| <div>Finishes</div> <div><div><div></div></div><div>04/ __ Black</div><div>(RAL 9005)</div></div> | <div>LED temperature colour</div> <div>/1 _ 2700 K <div><div></div><div>D</div></div></div> <div>CRI &gt;90 4365 lm 121 lm/W</div> | <div>Control</div> <div>0360 __ / __ A</div> <div>DALI, 1-10V, Push</div> |
|                                                                                                   | <div>/2 _ 3000 K <div><div></div><div>E</div></div></div> <div>CRI &gt;90 4365 lm 121 lm/W</div>                                   | <div>0360 __ / __ Z</div> <div>Casambi</div>                              |
|                                                                                                   | <div>/3 _ 3500 K <div><div></div><div>E</div></div></div> <div>CRI &gt;90 4502,7 lm 125,1 lm/W</div>                               |                                                                           |
|                                                                                                   |                                                                                                                                    |                                                                           |

|                                                                                                                                        |                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <div>Materials</div> <div>Diffuser: Pressed-glass. Body: Aluminum.</div> <div>Canopy: Steel.</div>                                     | <div>Packaging</div> <div>1 Box 0,27 x 0,60 x 0,60 m</div> <div>Vol 0,0972 m³</div> <div>Gross weight 9,1 Kg Net weight 8,19 Kg</div> |
| <div>Light Source and electronics</div> <div>9 x LED 4,5 W 350 mA</div> <div>Constant Current 350 mA</div> <div>100~240V 50/60Hz</div> | <div>Notes</div> <div>Pressed-glass diffuser.</div>                                                                                   |
| <div><div>LED</div><div><div></div></div><div>IP20</div><div>CE</div><div>EAC</div><div><div></div></div><div>Bi-volt</div></div>      |                                                                                                                                       |

## 0361




|                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                |                |                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------|--------------------------------------------------------------------------|
|  <b>04/ _ _ Black</b><br>(RAL 9005)                                                                                                                                                                                                                                                     | <b>LED temperature colour</b>                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                | <b>Control</b> |                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                          | <b>/1 _ 2700 K</b> <br>CRI >90 485 lm 121 lm/W<br><b>/2 _ 3000 K</b> <br>CRI >90 485 lm 121 lm/W<br><b>/3 _ 3500 K</b> <br>CRI >90 500,3 lm 125,10 lm/W | <b>0361 _ _ / _ 1</b><br>DALI                                                                  |                | <b>0361 _ _ / _ B</b><br>1-10V, Push<br><b>0361 _ _ / _ Z</b><br>Casambi |
|                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                |                |                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                |                |                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                |                |                                                                          |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                |                |                                                                          |
| <b>Materials</b>                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                            | <b>Packaging</b>                                                                               |                |                                                                          |
| Diffuser: Polycarbonate. Body: Aluminum.<br>Canopy: Steel.                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                            | 1 Box 0,25 x 0,42 x 0,42 m<br>Vol 0,0441 m³<br>Gross weight 2,6 Kg Net weight 2,34 Kg          |                |                                                                          |
| <b>Light Source and electronics</b>                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                            | <b>Notes</b>                                                                                   |                |                                                                          |
| 1 x LED 4,5 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                            | Without pressed-glass diffuser.<br>Additional cable length personalisation<br><b>16,00 €/m</b> |                |                                                                          |
| <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Bi-volt</div></div> |                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                |                |                                                                          |





**Electrical connection**

Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings


## 0362



|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|  <b>04/ _ _ Black</b><br>(RAL 9005)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>LED temperature colour</b><br>/1 _ 2700 K  | <b>Control</b><br><b>0362 _ _ / _ A</b><br>DALI-2, 1-10V, Push<br><b>0362 _ _ / _ Z</b><br>Casambi |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                                                                    |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                  |                                                                                                    |
| <b>Materials</b><br>Diffuser: Polycarbonate. Body: Aluminum.<br>Canopy: Steel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                  |                                                                                                    |
| <b>Light Source and electronics</b><br>2 x LED 4,5 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                  |                                                                                                    |
| <b>Packaging</b><br>1 Box 0,27 x 0,60 x 0,60 m<br>Vol 0,0972 m <sup>3</sup><br>Gross weight 4,6 Kg Net weight 4,14 Kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                  |                                                                                                    |
| <b>Notes</b><br>Without pressed-glass diffuser.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                                                                    |
| <div>      </div> |                                                                                                                                  |                                                                                                    |

|                                                                                     |                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>0363</b>                                                                         | <p>Finishes</p> <p>● <b>04/</b> _ _ Black (RAL 9005)</p> <p>LED temperature colour</p> <p>/1_ 2700 K  CRI &gt;80 1471 lm 109 lm/W</p>   | <p>Control</p> <p><b>0363</b> _ _ / _ A DALI-2, 1-10V, Push</p> <hr/> <p><b>0363</b> _ _ / _ Z Casambi</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|    | <p>Materials</p> <p>Diffuser: Polycarbonate. Body: Aluminum. Canopy: Steel.</p> <p>Light Source and electronics</p> <p>3 x LED 4,5 W 350 mA<br/>Constant Current 350 mA<br/>100~240V 50/60Hz</p>                         | <p>Packaging</p> <p>1 Box 0,27 x 0,60 x 0,60 m<br/>Vol 0,0972 m<sup>3</sup><br/>Gross weight 5,2 Kg Net weight 4,68 Kg</p> <p>Notes</p> <p>Without pressed-glass diffuser.</p> <p>     Bi-volt</p>            |
| <b>0364</b>                                                                         | <p>Finishes</p> <p>● <b>04/</b> _ _ Black (RAL 9005)</p> <p>LED temperature colour</p> <p>/1_ 2700 K  CRI &gt;80 1471 lm 109 lm/W</p>   | <p>Control</p> <p><b>0364</b> _ _ / _ A DALI-2, 1-10V, Push</p> <hr/> <p><b>0364</b> _ _ / _ Z Casambi</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|   | <p>Materials</p> <p>Diffuser: Polycarbonate. Body: Aluminum. Canopy: Steel.</p> <p>Light Source and electronics</p> <p>4 x LED 4,5 W 350 mA<br/>Constant Current 350 mA<br/>100~240V 50/60Hz</p>                         | <p>Packaging</p> <p>1 Box 0,27 x 0,60 x 0,60 m<br/>Vol 0,0972 m<sup>3</sup><br/>Gross weight 5,6 Kg Net weight 5,04 Kg</p> <p>Notes</p> <p>Without pressed-glass diffuser.</p> <p>     Bi-volt</p>  |
| <b>0365</b>                                                                         | <p>Finishes</p> <p>● <b>04/</b> _ _ Black (RAL 9005)</p> <p>LED temperature colour</p> <p>/1_ 2700 K  CRI &gt;80 2451 lm 109 lm/W</p> | <p>Control</p> <p><b>0365</b> _ _ / _ A DALI-2, 1-10V, Push</p> <hr/> <p><b>0365</b> _ _ / _ Z Casambi</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|  | <p>Materials</p> <p>Diffuser: Polycarbonate. Body: Aluminum. Canopy: Steel.</p> <p>Light Source and electronics</p> <p>5 x LED 4,5 W 350 mA<br/>Constant Current 350 mA<br/>100~240V 50/60Hz</p>                         | <p>Packaging</p> <p>1 Box 0,27 x 0,60 x 0,60 m<br/>Vol 0,0972 m<sup>3</sup><br/>Gross weight 5,04 Kg Net weight 5,49 Kg</p> <p>Notes</p> <p>Without pressed-glass diffuser.</p> <p>     Bi-volt</p> |
| <b>0366</b>                                                                         | <p>Finishes</p> <p>● <b>04/</b> _ _ Black (RAL 9005)</p> <p>LED temperature colour</p> <p>/1_ 2700 K  CRI &gt;80 2942 lm 109 lm/W</p> | <p>Control</p> <p><b>0366</b> _ _ / _ A DALI-2, 1-10V, Push</p> <hr/> <p><b>0366</b> _ _ / _ Z Casambi</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|  | <p>Materials</p> <p>Diffuser: Polycarbonate. Body: Aluminum. Canopy: Steel.</p> <p>Light Source and electronics</p> <p>6 x LED 4,5 W 350 mA<br/>Constant Current 350 mA<br/>100~240V 50/60Hz</p>                         | <p>Packaging</p> <p>1 Box 0,27 x 0,60 x 0,60 m<br/>Vol 0,0972 m<sup>3</sup><br/>Gross weight 6,7 Kg Net weight 6,03 Kg</p> <p>Notes</p> <p>Without pressed-glass diffuser.</p> <p>     Bi-volt</p>  |

## 0367



**Finishes**  
● 04/ \_ \_ Black (RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >80 3432 lm 109 lm/W

**Control**  
0367 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0367 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Polycarbonate. Body: Aluminum.  
Canopy: Steel.


**Light Source and electronics**  
7 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m<sup>3</sup>  
Gross weight 7,9 Kg Net weight 7,11 Kg

**Notes**  
Without pressed-glass diffuser.

LED IP20 Bi-volt

## 0368



**Finishes**  
● 04/ \_ \_ Black (RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >80 3922 lm 109 lm/W

**Control**  
0368 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0368 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Polycarbonate. Body: Aluminum.  
Canopy: Steel.


**Light Source and electronics**  
8 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m<sup>3</sup>  
Gross weight 8,4 Kg Net weight 7,56 Kg

**Notes**  
Without pressed-glass diffuser.

LED IP20 Bi-volt

## 0369



**Finishes**  
● 04/ \_ \_ Black (RAL 9005)

**LED temperature colour**  
/1 \_ 2700 K CRI >80 4412 lm 109 lm/W

**Control**  
0369 \_ \_ / \_ A  
DALI-2, 1-10V, Push

0369 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Polycarbonate. Body: Aluminum.  
Canopy: Steel.

**Light Source and electronics**  
9 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m<sup>3</sup>  
Gross weight 9,1 Kg Net weight 8,19 Kg


**Notes**  
Without pressed-glass diffuser.

LED IP20 Bi-volt

# Composing pendants

Next sketches are composed by one or more compositions


---

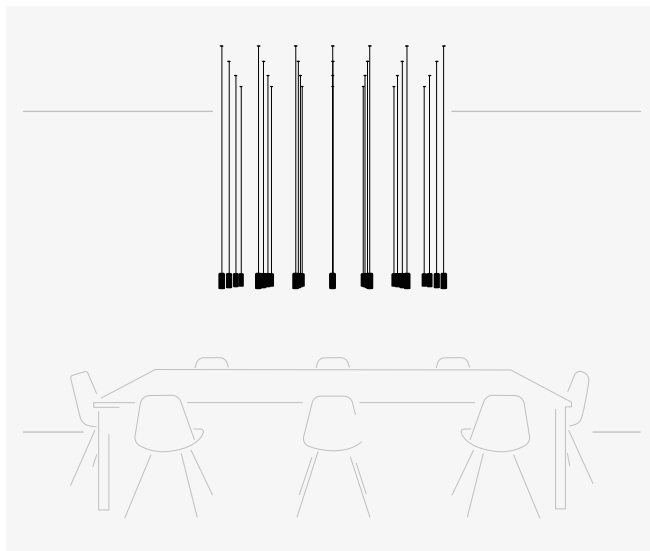


28 x 0361.




28 x 0345.

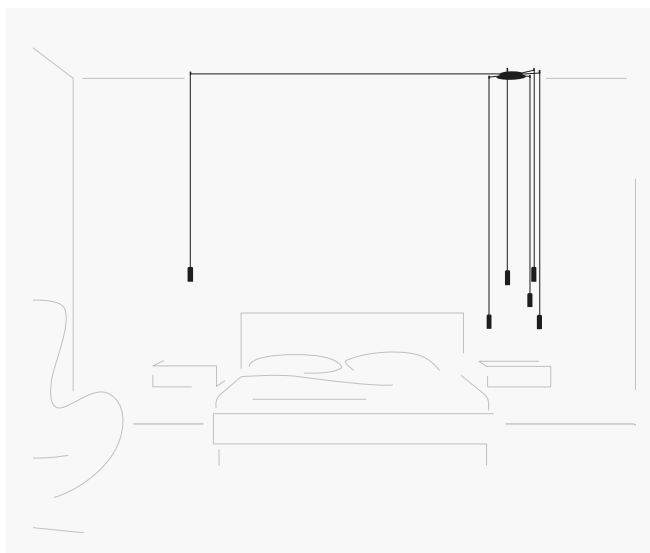


6 x 0345.

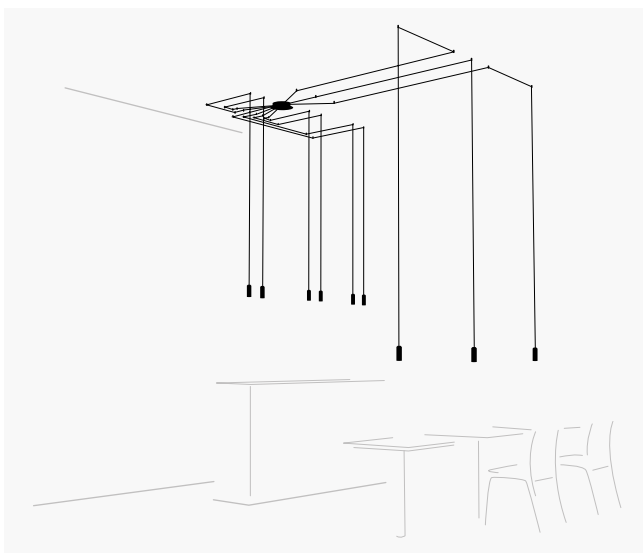


9 x 0361.

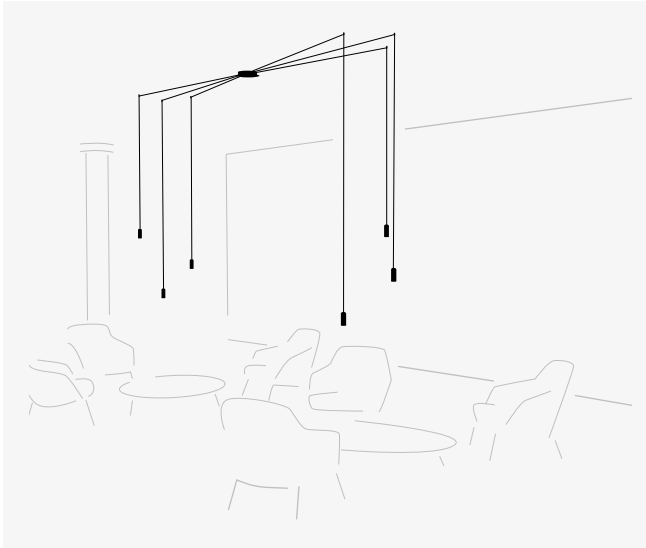


6 x 0361.

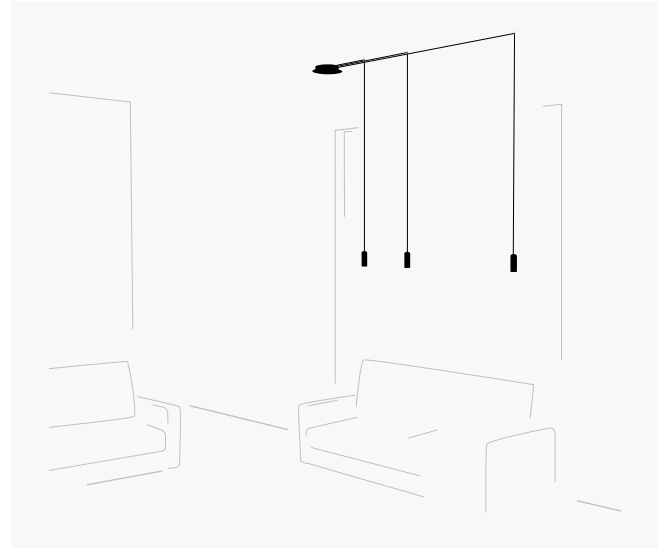

3 x 0361.

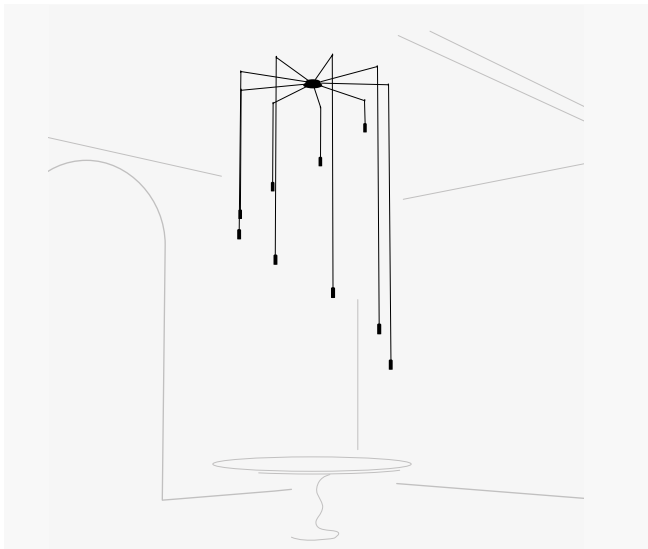

9 x 0345.

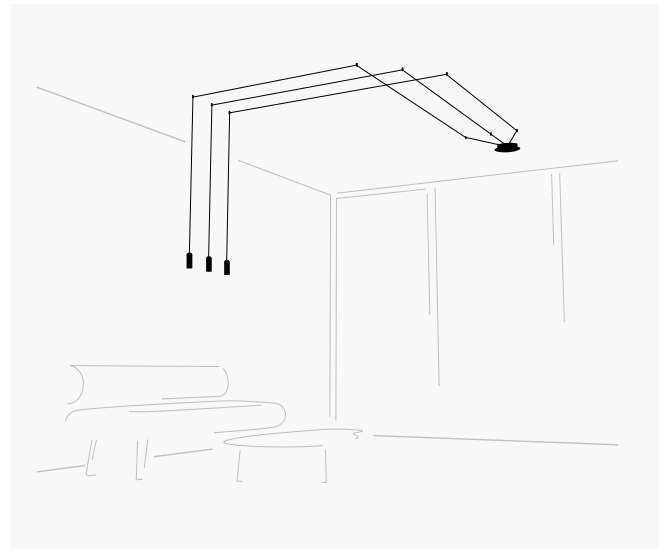


3 x 0361.

# Composing pendants

Next sketches are composed by one or more compositions


---

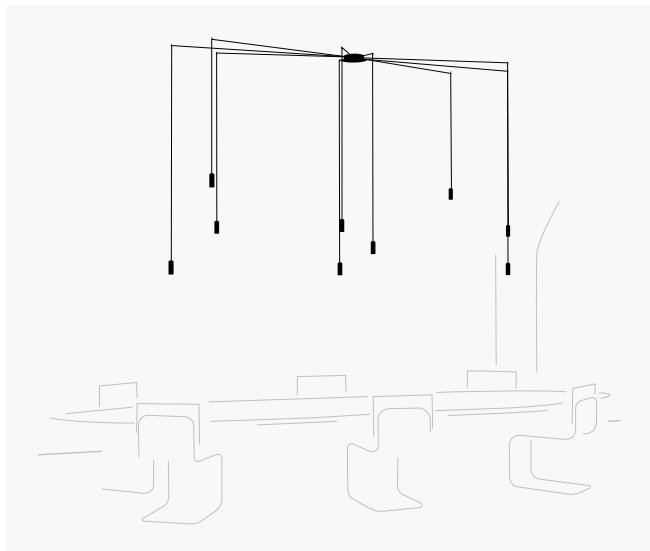

9 x 0361.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Wireflow FreeForm  
composition quick  
and easy at [vibia.com](http://vibia.com)

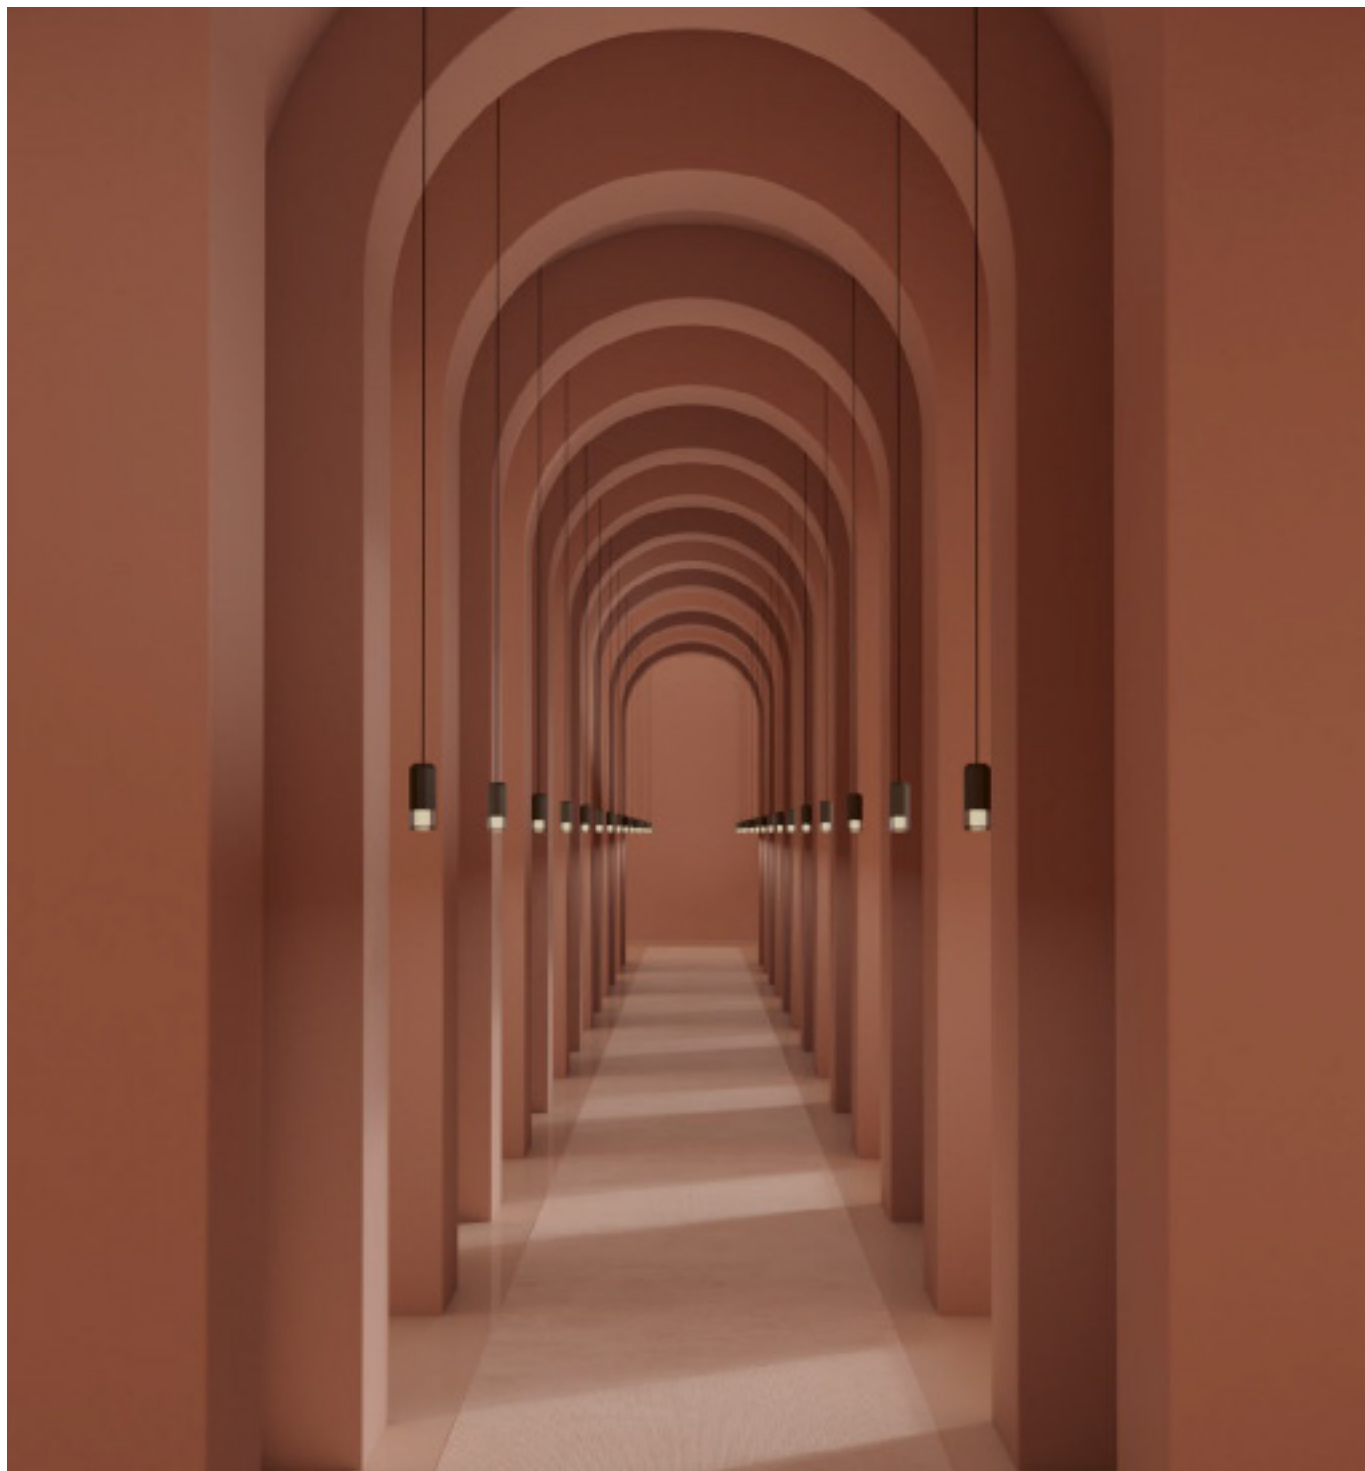

# Electrical connection options for models 0345 / 0361


Choose your preferred installation option  
according to your needs.  
For each composition, the optimal minimum  
number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate  
the silkiness and lightness of compositions on  
suspended ceilings, its great visual grandeur taking  
center stage.

For Ref. 0345 / 0361

### Remote





**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.

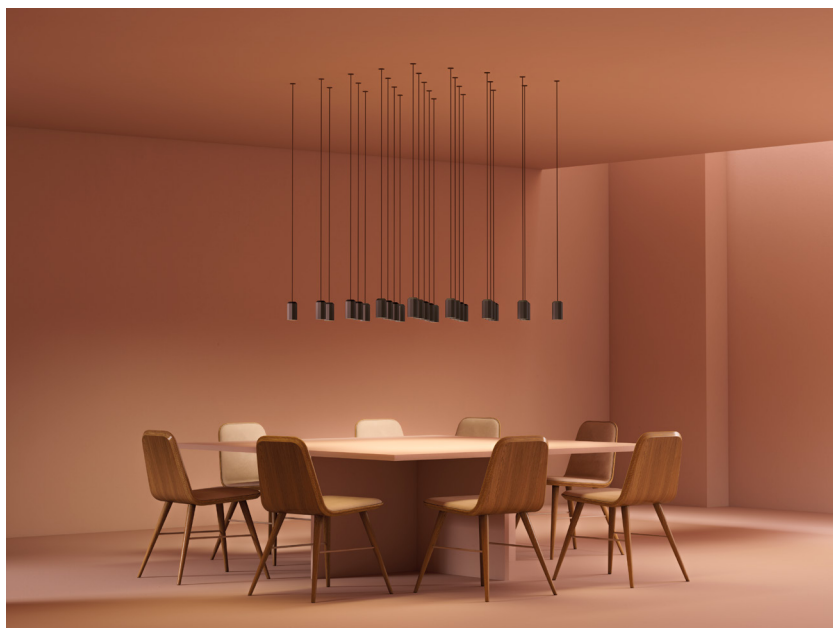




---

## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 0345 / 0361


### Surface



ø 20 cm  
match with  
fixture finish.




### Free Wire




ø 20 cm



you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.



ø 36 cm



ø 40 cm

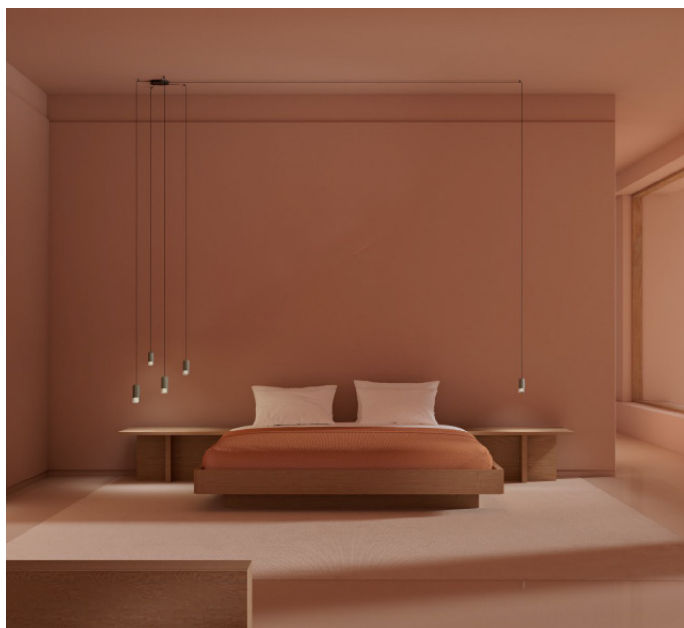


# Wireflow Chandelier

Design by Arik Levy

Wireflow is a collection of pendant lights that are at once presence and absence. Featuring slender black, electrical cables tipped with LED light terminals, its three-dimensional forms represent a contemporary reinterpretation of the traditional chandelier.

## Pendants


0315

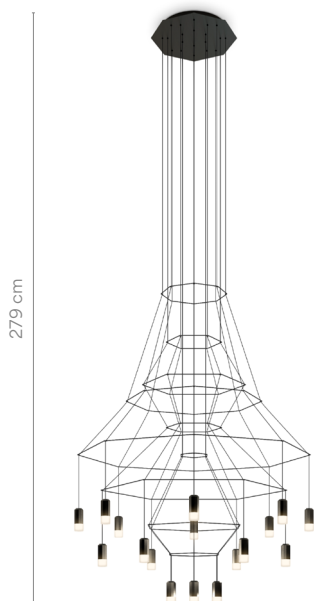

0374




0375

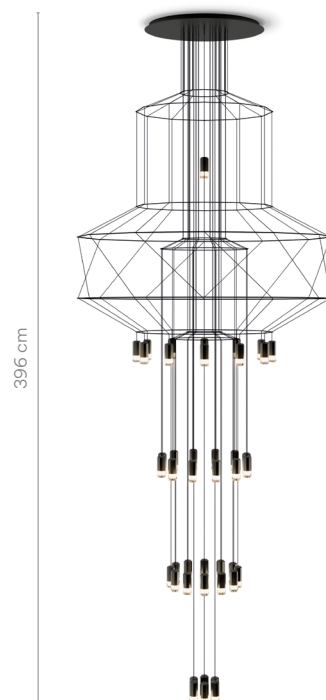


0376



0377


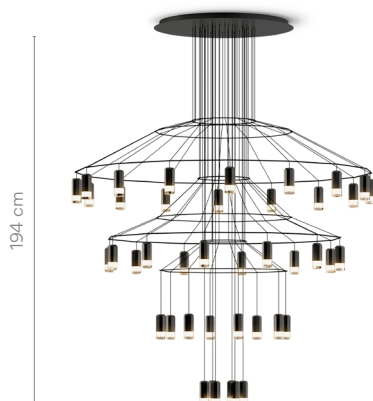


0378

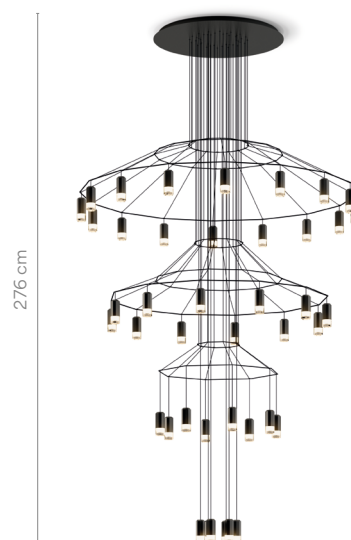

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
choose among multiple  
compositions designed  
and adapted to your  
project needs.


Personalise your own  
Wireflow composition  
quick and easy at  
[vibia.com](http://vibia.com)

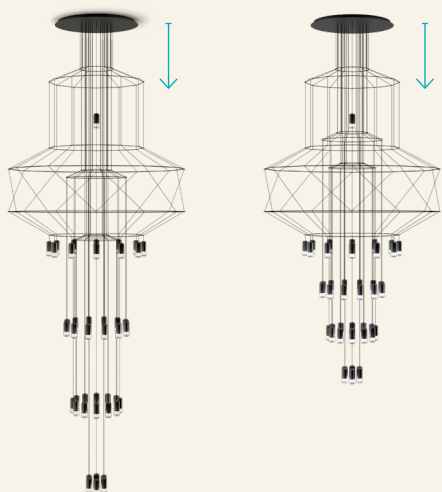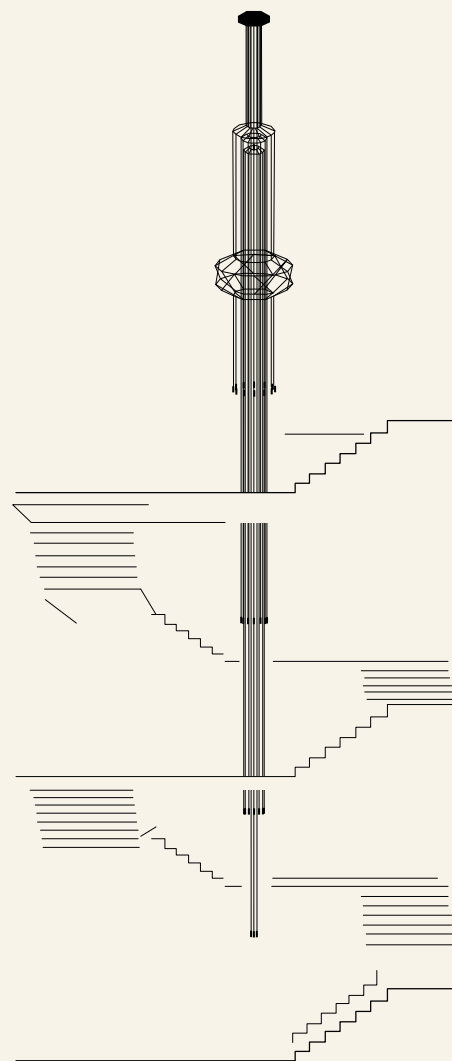

For configurations  
longer than 9 m,  
please ask Vibia  
customer service.



## 0315

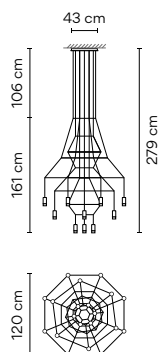


|                             |                                                                                                                                |                                       |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| Finishes                    | LED temperature colour                                                                                                         | Control                               |
| 04/ _ _ Black<br>(RAL 9005) | /1 _ 2700 K <br>CRI >90 9700 lm 121 lm/W      | 0315 _ _ / _ A<br>DALI-2, 1-10V, Push |
|                             | /2 _ 3000 K <br>CRI >90 9700 lm 121 lm/W      | 0315 _ _ / _ Z<br>Casambi             |
|                             | /3 _ 3500 K <br>CRI >90 10006,1 lm 125,1 lm/W |                                       |

---


|                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials                                                                      | Packaging                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Diffuser: Pressed-glass. Body: Aluminum.<br>Canopy and horizontal rods: Steel. | 2 Boxes<br>Total Vol 0,3832 m³<br>Gross weight 32 Kg Net weight 18 Kg                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Light Source and electronics                                                   | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 20 x LED 4,5 W 700 mA<br>Constant Current 700 mA<br>100~240V 50/60Hz           | Configuration layout at <a href="http://vibia.com">vibia.com</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                |       |

## 0374

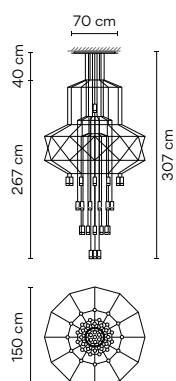


|                                                                                                                                         |                                                                                                                                                       |  |                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------|
| <div>Finishes</div> <div><div><div>04/</div><div>Black</div></div><div>(RAL 9005)</div></div>                                           | <div>LED temperature colour</div> <div><div>/1_</div><div>2700 K</div><div><div></div><div></div></div></div> <div>CRI &gt;90 20855 lm 121 lm/W</div> |  | <div>Control</div> <div><div>0374</div><div>/</div><div>A</div></div> <div>DALI-2, 1-10V, Push</div> |
|                                                                                                                                         | <div><div>/2_</div><div>3000 K</div><div><div></div><div></div></div></div> <div>CRI &gt;90 20855 lm 121 lm/W</div>                                   |  | <div>0374</div> <div>/</div> <div>Z</div> <div>Casambi</div>                                         |
|                                                                                                                                         | <div><div>/3_</div><div>3500 K</div><div><div></div><div></div></div></div> <div>CRI &gt;90 21513,1 lm 125,1 lm/W</div>                               |  |                                                                                                      |
|                                                                                                                                         |                                                                                                                                                       |  |                                                                                                      |
| <div>Materials</div> <div>Diffuser: Pressed-glass. Body: Aluminum.</div> <div>Canopy and horizontal rods: Steel.</div>                  |                                                                                                                                                       |  |                                                                                                      |
| <div>Light Source and electronics</div> <div>43 x LED 4,5 W 700 mA</div> <div>Constant Current 700 mA</div> <div>100~240V 50/60Hz</div> |                                                                                                                                                       |  |                                                                                                      |
| <div>Packaging</div> <div>2 Boxes</div> <div>Total Vol 0,5000 m³</div> <div>Gross weight 57 Kg Net weight 47 Kg</div>                   |                                                                                                                                                       |  |                                                                                                      |
| <div>Notes</div> <div>Configuration layout at <a href="#">vibia.com</a></div>                                                           |                                                                                                                                                       |  |                                                                                                      |
| <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Bi-volt</div></div>                               |                                                                                                                                                       |  |                                                                                                      |

## 0375

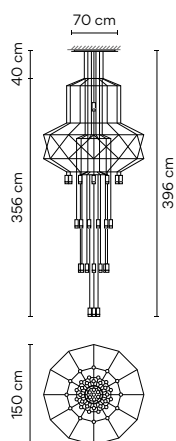

|                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |                                                                                                                          |
|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------|
| <div>Finishes</div> <div><div><div></div></div><div>04/ _ _ Black</div><div>(RAL 9005)</div></div> | <div>LED temperature colour</div> <div>/1 _ 2700 K <div><div></div></div></div> <div>CRI &gt;90 20855 lm 121 lm/W</div> <div>/2 _ 3000 K <div><div></div></div></div> <div>CRI &gt;90 20855 lm 121 lm/W</div> <div>/3 _ 3500 K <div><div></div></div></div> <div>CRI &gt;90 21513,1 lm 125,1 lm/W</div>                                                                                                                                                                                                                                                                                    |  | <div>Control</div> <div>0375 _ _ / _ A</div> <div>DALI-2, 1-10V, Push</div> <div>0375 _ _ / _ Z</div> <div>Casambi</div> |
|                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |                                                                                                                          |
|                                                                                                    | <div>Materials</div> <div>Diffuser: Pressed-glass. Body: Aluminum.</div> <div>Canopy and horizontal rods: Steel.</div> <div>Light Source and electronics</div> <div>43 x LED 4,5 W 700 mA</div> <div>Constant Current 700 mA</div> <div>100~240V 50/60Hz</div>                                                                                                                                                                                                                                                                                                                             |  |                                                                                                                          |
|                                                                                                    | <div>Packaging</div> <div>2 Boxes</div> <div>Total Vol 0,5000 m³</div> <div>Gross weight 57 Kg Net weight 47 Kg</div> <div>Notes</div> <div>Configuration layout at <a href="http://vibia.com">vibia.com</a></div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Bi-volt</div></div> |  |                                                                                                                          |

## 0376



**Finishes**  
 ● 04/ \_ \_ Black  
 (RAL 9005)

**LED temperature colour**  
 /1 \_ 2700 K CRI >90 20370 lm 121 lm/W  
 /2 \_ 3000 K CRI >90 20370 lm 121 lm/W  
 /3 \_ 3500 K CRI >90 21012,8 lm 125,1 lm/W

**Control**  
 0376 \_ \_ / \_ A  
 DALI-2, 1-10V, Push

0376 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Pressed-glass. Body: Aluminum.  
 Canopy and horizontal rods: Steel.


**Light Source and electronics**  
 42 x LED 4,5 W 700 mA  
 Constant Current 700 mA  
 100-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,5000 m³  
 Gross weight 56 Kg Net weight 46 Kg

**Notes**  
 Configuration layout at [vibia.com](http://vibia.com)

LED IP20 CE EAC Bi-volt

## 0377



**Finishes**  
 ● 04/ \_ \_ Black  
 (RAL 9005)

**LED temperature colour**  
 /1 \_ 2700 K CRI >90 20370 lm 121 lm/W  
 /2 \_ 3000 K CRI >90 20370 lm 121 lm/W  
 /3 \_ 3500 K CRI >90 21012,8 lm 125,1 lm/W

**Control**  
 0377 \_ \_ / \_ A  
 DALI-2, 1-10V, Push

0377 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Pressed-glass. Body: Aluminum.  
 Canopy and horizontal rods: Steel.


**Light Source and electronics**  
 42 x LED 4,5 W 700 mA  
 Constant Current 700 mA  
 100-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,5000 m³  
 Gross weight 56 Kg Net weight 46 Kg

**Notes**  
 Configuration layout at [vibia.com](http://vibia.com)

LED IP20 CE EAC Bi-volt

## 0378

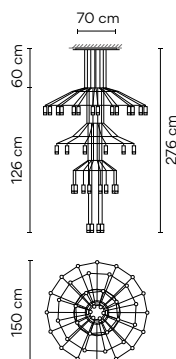

**Finishes**  
 ● 04/ \_ \_ Black  
 (RAL 9005)

**LED temperature colour**  
 /1 \_ 2700 K CRI >90 20370 lm 121 lm/W  
 /2 \_ 3000 K CRI >90 20370 lm 121 lm/W  
 /3 \_ 3500 K CRI >90 21012,8 lm 125,1 lm/W

**Control**  
 0378 \_ \_ / \_ A  
 DALI-2, 1-10V, Push

0378 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Pressed-glass. Body: Aluminum.  
 Canopy and horizontal rods: Steel.

**Light Source and electronics**  
 42 x LED 4,5 W 700 mA  
 Constant Current 700 mA  
 100-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol 0,5000 m³  
 Gross weight 56 Kg Net weight 46 Kg

**Notes**  
 Configuration layout at [vibia.com](http://vibia.com)

LED IP20 CE EAC Bi-volt

# Big

Design by Lievore, Altherr, Molina

Big breaks new ground in terms of scale and technology, revolutionising the ceiling light fitting.

## Ceiling

0530 0532

ø 120 cm




0531 0533

ø 100 cm



0530



Finishes

- 01 Chrome (Metallic finish)
- 93 White (RAL 9016)

Materials

Shade: Aluminum. Diffuser: Methacrylate.  
Ring: Steel.

Light Source and electronics

2 x 2G11 230V 36 W  
2 x 2G11 230V 24 W

0530 \_ \_

Packaging

1 Box 0,38 x 1,37 x 1,37 m  
Vol 0,7080 m³  
Gross weight 21 Kg Net weight 18,9 Kg


Notes

Easy-to-install and replace bulb system.

UNTIL STOCK RUNS OUT



0531



Finishes

- 01 Chrome (Metallic finish)
- 93 White (RAL 9016)

Materials

Shade: Aluminum. Diffuser: Methacrylate.  
Ring: Steel.

Light Source and electronics

2 x 2G11 230V 36 W  
2 x 2G11 230V 24 W

0531 \_ \_

Packaging

1 Box 0,34 x 1,14 x 1,14 m  
Vol 0,4420 m³  
Gross weight 15,2 Kg Net weight 13,68 Kg


Notes

Easy-to-install and replace bulb system.

UNTIL STOCK RUNS OUT



## 0532



**Finishes**  
**01/** \_ \_ Chrome  
 (Metallic finish)  
**93/** \_ \_ White  
 (RAL 9016)

**LED temperature colour**  
**/2** \_ 3000 K   
 CRI >90 8944 lm 132 lm/W

### Control

**0532** \_ \_ / \_ 1

DALI-2

**0532** \_ \_ / \_ B

1-10V, Push

**0532** \_ \_ / \_ Z

Casambi

### Materials

Shade: Aluminum. Diffuser: Methacrylate.  
 Ring: Steel.

### Light Source and electronics


4 x LED Quadrant 18,9 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

### Packaging


1 Box 0,38 x 1,36 x 1,36 m  
 Vol 0,7080 m<sup>3</sup>  
 Gross weight 21 Kg Net weight 18,9 Kg

### Notes

UNTIL STOCK RUNS OUT



## 0533



**Finishes**  
**01/** \_ \_ Chrome  
 (Metallic finish)  
**93/** \_ \_ White  
 (RAL 9016)

**LED temperature colour**  
**/2** \_ 3000 K   
 CRI >90 8944 lm 132 lm/W

### Control

**0533** \_ \_ / \_ 1

DALI-2

**0533** \_ \_ / \_ B

1-10V, Push

**0533** \_ \_ / \_ Z

Casambi

### Materials

Shade: Aluminum. Diffuser: Methacrylate.  
 Ring: Steel.

### Light Source and electronics


4 x LED Quadrant 18,9 W 500 mA  
 Constant Current 500 mA  
 220~240V 50/60Hz

### Packaging

1 Box 0,34 x 1,14 x 1,14 m  
 Vol 0,4420 m<sup>3</sup>  
 Gross weight 15,2 Kg Net weight 13,68 Kg

### Notes

UNTIL STOCK RUNS OUT



Easy-to-install and  
 replace bulb system.



Pendants




ø 120 cm  
**0530 0532**



ø 100 cm  
**0536 0538**

0535

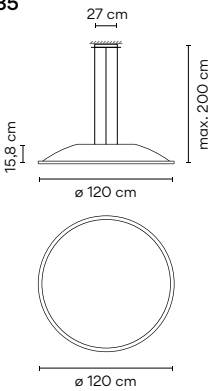

- Finishes
- 01 Chrome (Metallic finish)
  - 93 White (RAL 9016)

Materials  
Shade: Aluminum. Diffuser: Methacrylate.  
Ring: Steel. Canopy: Steel.

Light Source and electronics  
2 x 2G11 230V 36 W  
2 x 2G11 230V 24 W


0535 \_ \_

Packaging  
1 Box 0,38 x 1,37 x 1,37 m  
Vol 0,7080 m³  
Gross weight 25,6 Kg Net weight 23,04 Kg

Notes  
Easy-to-install and replace bulb system  
Extra cable length. **16,00 €/m**  
**UNTIL STOCK RUNS OUT**



0536

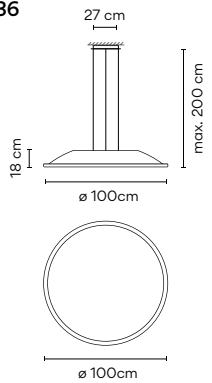

- Finishes
- 01 Chrome (Metallic finish)
  - 93 White (RAL 9016)

Materials  
Shade: Aluminum. Diffuser: Methacrylate.  
Ring: Steel. Canopy: Steel.

Light Source and electronics  
2 x 2G11 230V 36 W  
2 x 2G11 230V 24 W

0536 \_ \_

Packaging  
1 Box 0,34 x 1,14 x 1,14 m  
Vol 0,4420 m³  
Gross weight 19,6 Kg Net weight 17,64 Kg


Notes  
Easy-to-install and replace bulb system  
Extra cable length. **16,00 €/m**  
**UNTIL STOCK RUNS OUT**







## 0537

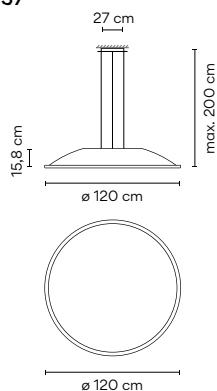

**Finishes**  
**01/** \_\_ Chrome  
 (Metallic finish)  
**93/** \_\_ White  
 (RAL 9016)

**LED temperature colour**  
**/2** \_\_ 3000 K   
 CRI >90 8944 lm 132 lm/W

**Control**

**0537** \_\_ / \_\_ **1**  
 DALI-2  
**0537** \_\_ / \_\_ **B**  
 1-10V, Push  
**0537** \_\_ / \_\_ **Z**  
 Casambi

### Materials

Shade: Aluminum. Diffuser: Methacrylate.  
 Ring: Steel. Canopy: Steel.

### Light Source and electronics

4 x LED Quadrant 18,9 W 500 mA  
 Constant Current 500 mA  
 220-240V 50/60Hz


### Packaging

1 Box 0,38 x 1,36 x 1,36 m  
 Vol 0,7080 m<sup>3</sup>  
 Gross weight 25,6 Kg Net weight 23,04 Kg

### Notes

Extra cable length. 16,00 €/m  
 UNTIL STOCK RUNS OUT

## 0538

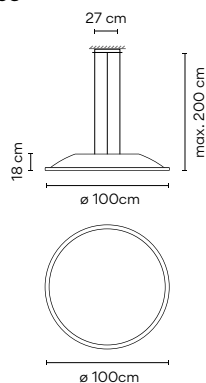

**Finishes**  
**01/** \_\_ Chrome  
 (Metallic finish)  
**93/** \_\_ White  
 (RAL 9016)

**LED temperature colour**  
**/2** \_\_ 3000 K   
 CRI >90 8944 lm 132 lm/W

**Control**

**0538** \_\_ / \_\_ **1**  
 DALI-2  
**0538** \_\_ / \_\_ **B**  
 1-10V, Push  
**0538** \_\_ / \_\_ **Z**  
 Casambi

### Materials

Shade: Aluminum. Diffuser: Methacrylate.  
 Ring: Steel. Canopy: Steel.

### Light Source and electronics

4 x LED Quadrant 18,9 W 500mA   
 Constant Current 500 mA  
 220-240V 50/60Hz

### Packaging

1 Box 0,38 x 1,36 x 1,36 m  
 Vol 0,7080 m<sup>3</sup>  
 Gross weight 19,6 Kg Net weight 17,64 Kg

### Notes

Extra cable length. 16,00 €/m  
 UNTIL STOCK RUNS OUT

# Big Built-in

Design by Lievore, Altherr, Molina

Big reimagines the utilitarian ceiling light with an enlarged diffuser that covers nearly the entire chrome fitting. The simple, oversized shape evokes a glowing orb overhead, its pure, geometric silhouette mimicking the effect of a skylight.

## Ceiling

0540

ø 123 cm



0546 0547

ø 36 cm



0543 0544


ø 60 cm



Chrome ring.  
Easy-to-install and replace  
bulb system.



0540



### Finishes

- 01 Chrome  
(Metallic finish)
- 93 White  
(RAL 9016)

### Materials

Diffuser: Methacrylate. Built-in body: Aluminum.  
Ring: Steel.

### Light Source and electronics

2 x G5 230V 24 W (T5)  
2 x G5 230V 39 W (T5)  
2 x G5 230V 54 W (T5)

0540

### Packaging

1 Box 0,38 x 1,37 x 1,37 m  
Vol 0,7080 m<sup>3</sup>  
Gross weight 23 Kg Net weight 1 Kg


### Notes

Built-in

UNTIL STOCK RUNS OUT

IP20 CE EAC ø 121 cm

0543



Finishes

- 01 Chrome (Metallic finish)
- 93 White (RAL 9016)

Materials

Diffuser: Methacrylate. Built-in body: Aluminum.  
Ring: Steel.

Light Source and electronics

2 x 2G11 230V 24 W  
2 x 2G11 230V 36 W

0543 \_\_

Packaging

1 Box 0,27 x 0,76 x 0,76 m  
Vol 0,1550 m<sup>3</sup>  
Gross weight 7 Kg Net weight 4,50 Kg


Notes

Built-in

UNTIL STOCK RUNS OUT

IP20 CE EAC ø 58,7 cm

0544



Finishes

- 01 Chrome (Metallic finish)
- 93 White (RAL 9016)

Materials

Diffuser: Methacrylate. Built-in body: Aluminum.  
Ring: Steel.

Light Source and electronics

2 x 2G11 230V 24 W  
2 x 2G11 230V 36 W

0544 \_\_

Packaging

1 Box 0,27 x 0,76 x 0,76 m  
Vol 0,1550 m<sup>3</sup>  
Gross weight 8 Kg Net weight 5 Kg


Notes

Built-in

UNTIL STOCK RUNS OUT

IP20 CE EAC ø 58,7 cm

0546



Finishes

- 01 Chrome (Metallic finish)
- 93 White (RAL 9016)

Materials

Diffuser: Methacrylate. Built-in body: Aluminum.  
Ring: Steel.

Light Source and electronics

1 x 2GX13 230V 55W (T5C)

0546 \_\_

Packaging

1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0440 m<sup>3</sup>  
Gross weight 2,5 Kg Net weight 2 Kg


Notes

Built-in

UNTIL STOCK RUNS OUT

IP20 CE EAC ø 34 cm

0547



Finishes

- 01 Chrome (Metallic finish)
- 93 White (RAL 9016)

Materials

Diffuser: Methacrylate. Built-in body: Aluminum.  
Ring: Steel.

Light Source and electronics

1 x 2GX13 230V 55 W (T5C)

0547 \_\_

Packaging

1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0440 m<sup>3</sup>  
Gross weight 2,5 Kg Net weight 2 Kg

Notes

Built-in

UNTIL STOCK RUNS OUT

IP20 CE EAC ø 34 cm


# I.Cono

Design by Lievore, Altherr, Molina


Exuding a poised, Scandinavian presence, I.Cono is distinguished by its signature visor-shaped shade that's sleekly angled for a stylish look. Ideal for precision lighting or reading, its pure and clean design conceals its rotation mechanisms.

Table Floor Wall



|                                                                                                     |                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <div>0700</div>  | <div>Finishes</div> <div><div><div></div></div>10 White<br/>(NCS S 0300-N)</div> <div><div></div></div> 21 Black Grey<br>(NCS S 7000-N) |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|

## 0712



- Finishes**
- 10 White (NCS S 0300-N)
  - 21 Black Grey (NCS S 7000-N)
  - 25 Beige D1 (NCS S 4005-G80Y)
  - 37 Terra Red (NCS S 4040-Y70R)
  - 42 Blue M1 (NCS S 5010-B10G)
- LED temperature colour**  
2700 K 800 lm/W

0712 \_\_

### Materials

Shade: Polycarbonate. Base: Zamak.  
Vertical tube: Steel.

### Light Source and electronics

1 x LED E14 230V 7 W

### Packaging


1 Box 0,34 x 1,50 x 0,32 m  
Vol 0,1632 m<sup>3</sup>  
Gross weight 16 Kg Net weight 11,8 Kg

### Notes

Switch on the cable.  
Electric cable 1,5 m



## 0720



- Finishes**
- 10 White (NCS S 0300-N)
  - 21 Black Grey (NCS S 7000-N)
  - 25 Beige D1 (NCS S 4005-G80Y)
  - 37 Terra Red (NCS S 4040-Y70R)
  - 42 Blue M1 (NCS S 5010-B10G)
- LED temperature colour**  
2700 K 800 lm/W

0720 \_\_

### Materials

Shade: Polycarbonate.  
Wall plate: Zamak.

### Light Source and electronics

1 x LED E14 230V 7 W

### Packaging

1 Box 0,21 x 0,48 x 0,21 m  
Vol 0,0212 m<sup>3</sup>  
Gross weight 2,2 Kg Net weight 1 Kg

### Notes

On/off switch on the wall plate



# Flex

Design by Ramos & Bassols

Inspired by the smooth arc of the Bézier curve, Flex exemplifies the principle of “form follows function.” The LED table lamp features a sturdy steel base and an articulated, fully adjustable aluminum arm.

## Table



|      |  |                                                                                                                |                                                                                                                                          |                    |
|------|--|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 0750 |  | Finishes                                                                                                       | LED temperature colour                                                                                                                   | Control            |
|      |  | <ul style="list-style-type: none"><li>03 Gloss white (RAL 9016)</li><li>18 Gloss graphite (RAL 7016)</li></ul> | 3000 K<br>CRI >80 339 lm 42 lm/W                                                                                                         | 0750 _ _<br>Sensor |
|      |  | Materials                                                                                                      | Packaging                                                                                                                                |                    |
|      |  | Head and Arm: Aluminum.<br>Base: Steel.                                                                        | 1 Box 0,12 x 0,49 x 0,85 m<br>Vol 0,0479 m³<br>Gross weight 5 Kg Net weight 3,6 Kg                                                       |                    |
|      |  | Light Source and electronics                                                                                   | Notes                                                                                                                                    |                    |
|      |  | 1 x LED PLATE 24V 8 W<br>Constant Voltage 24V<br>100~240V 50/60Hz                                              | Electric cable 2 m.<br><b>UNTIL STOCK RUNS OUT</b>                                                                                       |                    |
|      |  |                                                                                                                | <div><div>LED</div><div></div><div>IP20</div><div>CE</div><div>EAC</div><div></div></div> <div><div>Dimmer</div><div>Bi-volt</div></div> |                    |

|      |  |                                                                                                   |                                                                                                                                          |                    |
|------|--|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 0751 |  | Finishes                                                                                          | LED temperature colour                                                                                                                   | Control            |
|      |  | <ul style="list-style-type: none"><li>03 White (RAL 906)</li><li>18 Graphite (RAL 7016)</li></ul> | 3000 K<br>CRI >80 339 lm 42 lm/W                                                                                                         | 0751 _ _<br>Sensor |
|      |  | Materials                                                                                         | Packaging                                                                                                                                |                    |
|      |  | Head and Arm: Aluminum.<br>Base: Steel.                                                           | 1 Box 0,12 x 0,49 x 0,85 m<br>Vol 0,0479 m³<br>Gross weight 5 Kg Net weight 3,6 Kg                                                       |                    |
|      |  | Light Source and electronics                                                                      | Notes                                                                                                                                    |                    |
|      |  | 1 x LED PLATE 24V 8 W<br>Constant Voltage 24V<br>100~240V 50/60Hz                                 | Electric cable 2 m.<br><b>UNTIL STOCK RUNS OUT</b>                                                                                       |                    |
|      |  |                                                                                                   | <div><div>LED</div><div></div><div>IP20</div><div>CE</div><div>EAC</div><div></div></div> <div><div>Dimmer</div><div>Bi-volt</div></div> |                    |





## 0755

### Finishes


- 03/ \_ Gloss white (RAL 9016)
- 18/ \_ Gloss graphite (RAL 7016)

### LED temperature colour

3000 K   
CRI >80 339 lm 42 lm/W

### Control

0755 \_  
Sensor



### Materials

Head and Arm: Aluminum.  
Base: Steel.

### Light Source and electronics

1 x LED PLATE 24V 8 W  
Constant Voltage 24V  
100~240V 50/60Hz

### Packaging

1 Box 0,12 x 0,49 x 0,85 m  
Vol 0,0479 m³  
Gross weight 3,7 Kg Net weight 2,3 Kg

### Notes

Electric cable 2 m.

**UNTIL STOCK RUNS OUT**

LED  IP20 CE EAC 

Dimmer Bi-volt

## 0756

### Finishes


- 03/ \_ White (RAL 906)
- 18/ \_ Graphite (RAL 7016)

### LED temperature colour

3000 K   
CRI >80 339 lm 42 lm/W

### Control

0756 \_  
Sensor



### Materials

Head and Arm: Aluminum.  
Base: Steel.

### Light Source and electronics

1 x LED PLATE 24V 8 W  
Constant Voltage 24V  
100~240V 50/60Hz

### Packaging

1 Box 0,12 x 0,49 x 0,85 m  
Vol 0,0479 m³  
Gross weight 3,7 Kg Net weight 2,3 Kg

### Notes

Electric cable 2 m.

**UNTIL STOCK RUNS OUT**

EAC LED  IP20 CE Dimmer Bi-volt

# Algorithm Grid

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions. Can be customized to suit any space.


## Pendants

\* Built-in version




75 cm

0825 \*0827




89 cm

0880 \*0882

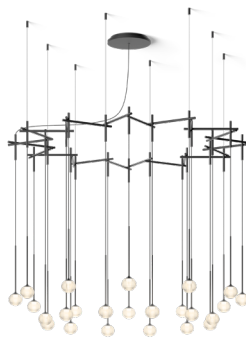


160 cm

0885 \*0887




123 cm

0830 \*0832



214 cm


0835 \*0837

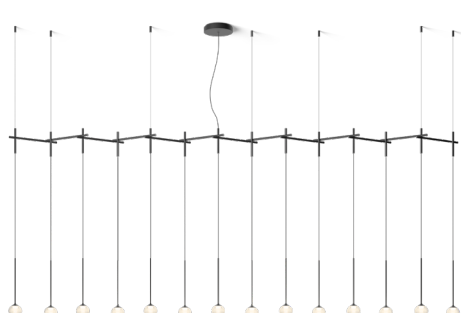

305 cm


0840 \*0842





183 cm

**0845 \*0847**

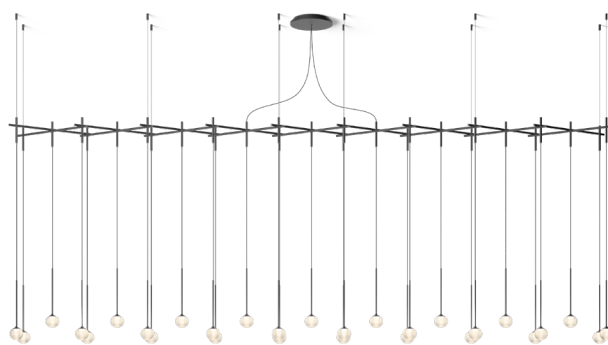


399 cm

**0850 \*0852**



60 cm

**0855 \*0857**




110 cm

**0860 \*0862**




160 cm

**0865 \*0867**









110 cm

**0870 \*0872**




185 cm

**0875 \*0877**

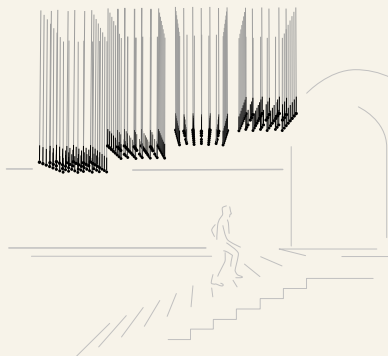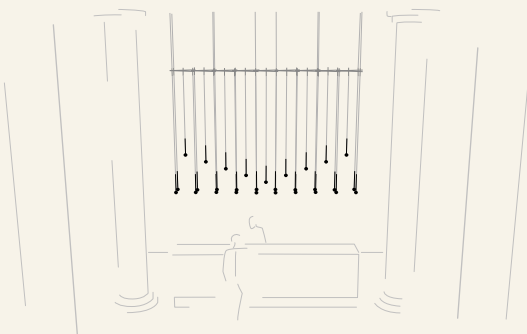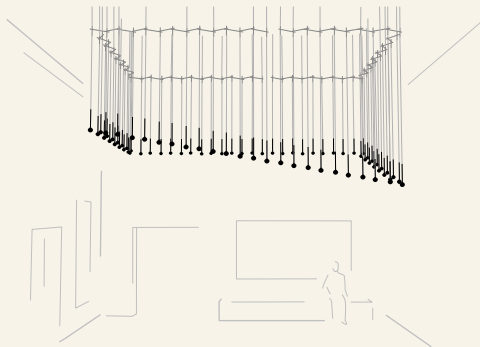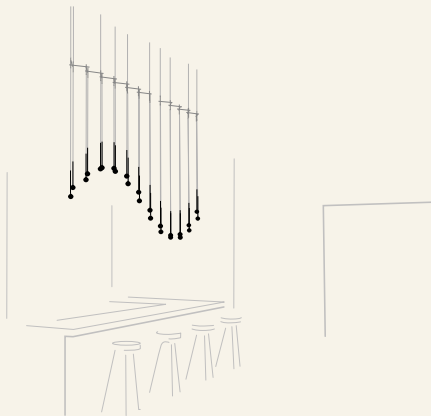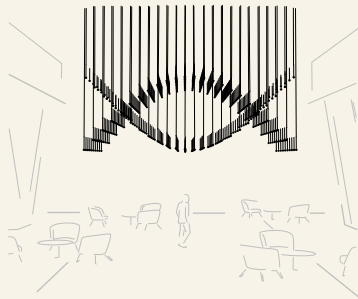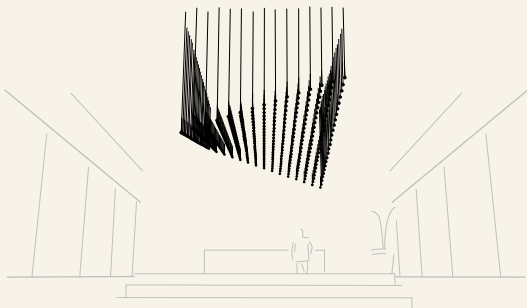


Surface.

Built-in.  
11,5 cm Die-cut diameter,  
12 cm minimum height in ceiling.

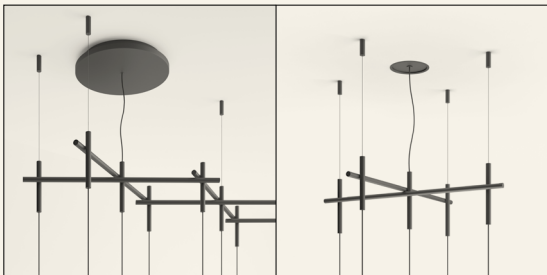

Adjustable cable installation.

Rigid stem installation.  
Fixed at 25 cm.

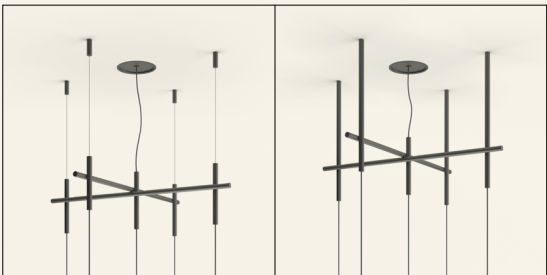


## Adjust height of standard model


To personalize luminaire height, without adjusting diffusers layout.

The steel cables that go from the structure to the ceiling are the only ones that allow the height of the lamp to be adjusted. The installation manual describes how to do this and how to cut the cables.

Personalise your own  
 Algorithm composition  
 quick and easy at  
[vibia.com](http://vibia.com)

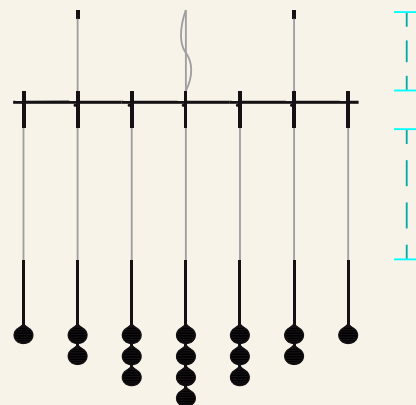

### 0825



| Finishes                              | LED temperature colour                                          |
|---------------------------------------|-----------------------------------------------------------------|
| 18/ _ _ Graphite<br>(ADAPTA RF9913WX) | /1 _ 2700 K <input type="text"/><br>CRI >90 3122,8 lm 99 lm/W   |
| 93/ _ _ White<br>(RAL 9016)           | /3 _ 3500 K <input type="text"/><br>CRI >90 3122,8 lm 99,1 lm/W |

| Control                               |
|---------------------------------------|
| 0825 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 0825 _ _ / _ Z<br>Casambi             |

**Materials**  
 Ball: Blowed glass. Glass fixation: Aluminum.  
 Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


**Light Source and electronics**  
 10 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol. 0,324 m³  
 Gross weight 15,5 Kg Net weight 10,5 Kg

**Notes**  
 Surface

LED IP20 CE EAC Bi-volt

### 0827



| Finishes                              | LED temperature colour                                          |
|---------------------------------------|-----------------------------------------------------------------|
| 18/ _ _ Graphite<br>(ADAPTA RF9913WX) | /1 _ 2700 K <input type="text"/><br>CRI >90 3122,8 lm 99 lm/W   |
| 93/ _ _ White<br>(RAL 9016)           | /3 _ 3500 K <input type="text"/><br>CRI >90 3122,8 lm 99,1 lm/W |

| Control                               |
|---------------------------------------|
| 0827 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 0827 _ _ / _ Z<br>Casambi             |

**Materials**  
 Ball: Blowed glass. Glass fixation: Aluminum.  
 Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.


**Light Source and electronics**  
 10 x LED 3,15 W 1050 mA  
 Constant Current 1050 mA  
 100-240V 50/60Hz

**Packaging**  
 2 Boxes  
 Total Vol. 0,324 m³  
 Gross weight 15,5 Kg Net weight 10,5 Kg

**Notes**  
 Built-in

LED IP20 CE EAC Bi-volt ø 10,5 cm

## 0830



| Finishes                                       | LED temperature colour                    |
|------------------------------------------------|-------------------------------------------|
| ● <b>18/</b> _ _ Graphite<br>(ADAPTA RF9913WX) | /1_ 2700 K<br>CRI >90 1873,68 lm 99 lm/W  |
| ● <b>93/</b> _ _ White<br>(RAL 9016)           | /3_ 3500 K<br>CRI >90 1873,7 lm 99,1 lm/W |

| Control                                    |
|--------------------------------------------|
| <b>0830</b> _ / _ A<br>DALI-2, 1-10V, Push |
| <b>0830</b> _ / _ Z<br>Casambi             |


**Materials**  
Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

**Light Source and electronics**  
6 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol. 0,1705 m³  
Gross weight 3,5 Kg Net weight 5,8 Kg

**Notes**  
Surface

## 0832



| Finishes                                       | LED temperature colour                    |
|------------------------------------------------|-------------------------------------------|
| ● <b>18/</b> _ _ Graphite<br>(ADAPTA RF9913WX) | /1_ 2700 K<br>CRI >90 1873,68 lm 99 lm/W  |
| ● <b>93/</b> _ _ White<br>(RAL 9016)           | /3_ 3500 K<br>CRI >90 1873,7 lm 99,1 lm/W |

| Control                                    |
|--------------------------------------------|
| <b>0832</b> _ / _ A<br>DALI-2, 1-10V, Push |
| <b>0832</b> _ / _ Z<br>Casambi             |


**Materials**  
Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

**Light Source and electronics**  
6 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol. 0,1705 m³  
Gross weight 3,5 Kg Net weight 5,8 Kg

**Notes**  
Built-in

## 0835



| Finishes                                       | LED temperature colour                    |
|------------------------------------------------|-------------------------------------------|
| ● <b>18/</b> _ _ Graphite<br>(ADAPTA RF9913WX) | /1_ 2700 K<br>CRI >90 3122,8 lm 99 lm/W   |
| ● <b>93/</b> _ _ White<br>(RAL 9016)           | /3_ 3500 K<br>CRI >90 3122,8 lm 99,1 lm/W |

| Control                                    |
|--------------------------------------------|
| <b>0835</b> _ / _ A<br>DALI-2, 1-10V, Push |
| <b>0835</b> _ / _ Z<br>Casambi             |


**Materials**  
Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

**Light Source and electronics**  
10 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol. 0,3220 m³  
Gross weight 15,5 Kg Net weight 10,5 Kg

**Notes**  
Surface

## 0837



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K  CRI >90 3122,8 lm 99 lm/W
- /3 \_ 3500 K  CRI >90 3122,8 lm 99,1 lm/W

### Control

- 0837 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0837 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

10 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol. 0,3220 m³  
Gross weight 15,5 Kg Net weight 10,5 Kg

### Notes

Built-in



## 0840



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K  CRI >90 4371,92 lm 99 lm/W
- /3 \_ 3500 K  CRI >90 4371,92 lm 99,1 lm/W

### Control

- 0840 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0840 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

14 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


3 Boxes  
Total Vol. 0,5275 m³  
Gross weight 17,3 Kg Net weight 11,3 Kg

### Notes

Surface



## 0842



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K  CRI >90 4371,92 lm 99 lm/W
- /3 \_ 3500 K  CRI >90 4371,92 lm 99,1 lm/W

### Control

- 0842 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0842 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

14 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz




### Packaging

3 Boxes  
Total Vol. 0,5275 m³  
Gross weight 17,3 Kg Net weight 11,3 Kg


### Notes

Built-in



|                                                                                                    |                                                                                                                                                                                 |                                                                                                                                                                                           |                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>0845</div>   | <div>Finishes</div> <div><div><div></div><div>18/ _ _ Graphite</div><div>(ADAPTA RF9913WX)</div></div><div><div></div><div>93/ _ _ White</div><div>(RAL 9016)</div></div></div> | <div>LED temperature colour</div> <div><div>/1 _ 2700 K </div><div>CRI &gt;90 4371,92 lm 99 lm/W</div></div> <div><div>/3 _ 3500 K </div><div>CRI &gt;90 4371,92 lm 99,1 lm/W</div></div> | <div>Control</div> <div><div>0845 _ _ / _ A</div><div>DALI-2, 1-10V, Push</div></div> <div><div>0845 _ _ / _ Z</div><div>Casambi</div></div>                        |
|                                                                                                    | <div>Materials</div> <div>Ball: Blowed glass. Glass fixation: Aluminum.<br/>Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.</div>                                  | <div>Packaging</div> <div>2 Boxes<br/>Total Vol. 0,3220 m³<br/>Gross weight 18,3 Kg Net weight 13,3 Kg</div>                                                                              | <div>Notes</div> <div>Surface</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Bi-volt</div></div>                       |
|                                                                                                    | <div>Light Source and electronics</div> <div>14 x LED 3,15 W 1050 mA<br/>Constant Current 1050 mA<br/>100~240V 50/60Hz</div>                                                    |                                                                                                                                                                                           |                                                                                                                                                                     |
| <div>0847</div>  | <div>Finishes</div> <div><div><div></div><div>18/ _ _ Graphite</div><div>(ADAPTA RF9913WX)</div></div><div><div></div><div>93/ _ _ White</div><div>(RAL 9016)</div></div></div> | <div>LED temperature colour</div> <div><div>/1 _ 2700 K </div><div>CRI &gt;90 4371,92 lm 99 lm/W</div></div> <div><div>/3 _ 3500 K </div><div>CRI &gt;90 4371,92 lm 99,1 lm/W</div></div> | <div>Control</div> <div><div>0847 _ _ / _ A</div><div>DALI-2, 1-10V, Push</div></div> <div><div>0847 _ _ / _ Z</div><div>Casambi</div></div>                        |
|                                                                                                    | <div>Materials</div> <div>Ball: Blowed glass. Glass fixation: Aluminum.<br/>Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.</div>                                  | <div>Packaging</div> <div>2 Boxes<br/>Total Vol. 0,3220 m³<br/>Gross weight 18,3 Kg Net weight 13,3 Kg</div>                                                                              | <div>Notes</div> <div>Built-in</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Bi-volt</div><div></div> ø 10,5 cm</div> |
|                                                                                                    | <div>Light Source and electronics</div> <div>14 x LED 3,15 W 1050 mA<br/>Constant Current 1050 mA<br/>100~240V 50/60Hz</div>                                                    |                                                                                                                                                                                           |                                                                                                                                                                     |
| <div>0850</div>  | <div>Finishes</div> <div><div><div></div><div>18/ _ _ Graphite</div><div>(ADAPTA RF9913WX)</div></div><div><div></div><div>93/ _ _ White</div><div>(RAL 9016)</div></div></div> | <div>LED temperature colour</div> <div><div>/1 _ 2700 K </div><div>CRI &gt;90 9056,12 lm 99 lm/W</div></div> <div><div>/3 _ 3500 K </div><div>CRI &gt;90 9056,12 lm 99,1 lm/W</div></div> | <div>Control</div> <div><div>0850 _ _ / _ A</div><div>DALI-2, 1-10V, Push</div></div> <div><div>0850 _ _ / _ Z</div><div>Casambi</div></div>                        |
|                                                                                                    | <div>Materials</div> <div>Ball: Blowed glass. Glass fixation: Aluminum.<br/>Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.</div>                                  | <div>Packaging</div> <div>2 Boxes<br/>Total Vol. 0,6260 m³<br/>Gross weight 26 Kg Net weight 20 Kg</div>                                                                                  | <div>Notes</div> <div>Surface</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div></div><div>Dimmer</div><div>Bi-volt</div></div>                    |
|                                                                                                    | <div>Light Source and electronics</div> <div>29 x LED 3,15 W 1050 mA<br/>Constant Current 1050 mA<br/>100~240V 50/60Hz</div>                                                    |                                                                                                                                                                                           |                                                                                                                                                                     |

## 0852



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 9056,12 lm 99 lm/W
- /3 \_ 3500 K CRI >90 9056,12 lm 99,1 lm/W

### Control

- 0852 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0852 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

29 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol. 0,6260 m³  
Gross weight 26 Kg Net weight 20 Kg


### Notes

Built-in



Bi-volt ø 10,5 cm

## 0855



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 1561,4 lm 99 lm/W
- /3 \_ 3500 K CRI >90 1130,4 lm 71,8 lm/W

### Control

- 0855 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0855 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics


5 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol. 0,115 m³  
Gross weight 8,5 Kg Net weight 5,8 Kg


### Notes

Surface



Dimmer Bi-volt

## 0857



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 1561,4 lm 99 lm/W
- /3 \_ 3500 K CRI >90 1130,4 lm 71,8 lm/W

### Control

- 0857 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0857 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

5 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol. 0,115 m³  
Gross weight 8,5 Kg Net weight 5,8 Kg


### Notes

Built-in



Bi-volt ø 10,5 cm

## 0860



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 4059,64 lm 99 lm/W
- /3 \_ 3500 K CRI >90 4059,64 lm 99,1 lm/W

### Control

- 0860 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0860 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

13 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz


### Packaging

2 Boxes  
Total Vol. 0,3290 m³  
Gross weight 17,35 Kg Net weight 11,85 Kg

### Notes

Surface

## 0862



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 4059,64 lm 99 lm/W
- /3 \_ 3500 K CRI >90 4059,64 lm 99,1 lm/W

### Control

- 0862 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0862 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

13 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol. 0,3290 m³  
Gross weight 17,35 Kg Net weight 11,85 Kg

### Notes

Built-in

ø 10,5 cm

## 0865



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 7807 lm 99 lm/W
- /3 \_ 3500 K CRI >90 7807 lm 99,1 lm/W

### Control

- 0865 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0865 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

25 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol. 0,7280 m³  
Gross weight 25,25 Kg Net weight 20,25 Kg

### Notes

Surface



## 0867



| Finishes                                | LED temperature colour                 |
|-----------------------------------------|----------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF9913WX) | /1 _ 2700 K  CRI >90 7807 lm 99 lm/W   |
| ● 93/ _ _ White<br>(RAL 9016)           | /3 _ 3500 K  CRI >90 7807 lm 99,1 lm/W |

| Control                               |
|---------------------------------------|
| 0867 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 0867 _ _ / _ Z<br>Casambi             |

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

25 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol. 0,7280 m<sup>3</sup>  
Gross weight 25,25 Kg Net weight 20,25 Kg


### Notes

Built-in



Bi-volt ø 10,5 cm

## 0870



| Finishes                                | LED temperature colour                   |
|-----------------------------------------|------------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF9913WX) | /1 _ 2700 K  CRI >90 4684,2 lm 99 lm/W   |
| ● 93/ _ _ White<br>(RAL 9016)           | /3 _ 3500 K  CRI >90 4684,2 lm 99,1 lm/W |

| Control                               |
|---------------------------------------|
| 0870 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 0870 _ _ / _ Z<br>Casambi             |

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

15 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol. 0,2679 m<sup>3</sup>  
Gross weight 18,25 Kg Net weight 13,75 Kg


### Notes

Surface



Bi-volt ø 10,5 cm

## 0872



| Finishes                                | LED temperature colour                   |
|-----------------------------------------|------------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF9913WX) | /1 _ 2700 K  CRI >90 4684,2 lm 99 lm/W   |
| ● 93/ _ _ White<br>(RAL 9016)           | /3 _ 3500 K  CRI >90 4684,2 lm 99,1 lm/W |

| Control                               |
|---------------------------------------|
| 0872 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 0872 _ _ / _ Z<br>Casambi             |

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

15 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol. 0,2679 m<sup>3</sup>  
Gross weight 18,25 Kg Net weight 13,75 Kg


### Notes

Built-in



Bi-volt ø 10,5 cm

## 0875



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 7494,72 lm 99 lm/W
- /3 \_ 3500 K CRI >90 7494,72 lm 99,1 lm/W

### Control

- 0875 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0875 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

24 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol. 0,4500 m³  
Gross weight 30,1 Kg Net weight 22,1 Kg

### Notes

Surface



## 0877



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 7494,72 lm 99 lm/W
- /3 \_ 3500 K CRI >90 7494,72 lm 99,1 lm/W

### Control

- 0877 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0877 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics


24 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol. 0,4500 m³  
Gross weight 30,1 Kg Net weight 22,1 Kg

### Notes

Built-in



## 0880



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K CRI >90 3747,4 lm 99 lm/W
- /3 \_ 3500 K CRI >90 2712,9 lm 71,8 lm/W

### Control

- 0880 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0880 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

12 x LED 3,15W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol. 0,3290 m³  
Gross weight 16,5 Kg Net weight 11,4 Kg

### Notes

Surface



## 0882



### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K **F** CRI >90 3747,4 lm 99 lm/W
- /3 \_ 3500 K **G** CRI >90 2712,9 lm 71,8 lm/W

### Control

- 0882 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0882 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics


12 x LED 3,15W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol. 0,3290 m³  
Gross weight 16,5 Kg Net weight 11,4 Kg

### Notes

Built-in



## 0885

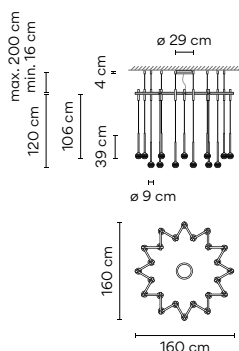

### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K **F** CRI >90 7494,7 lm 99 lm/W
- /3 \_ 3500 K **G** CRI >90 5425,9 lm 71,8 lm/W

### Control

- 0885 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0885 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

24 x LED 3,15W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol. 0,7280 m³  
Gross weight 25,25 Kg Net weight 20,25 Kg

### Notes

Surface



## 0887

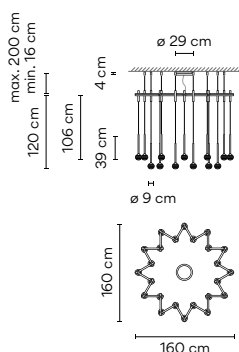

### Finishes

- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
- 93/ \_ \_ White (RAL 9016)

### LED temperature colour

- /1 \_ 2700 K **F** CRI >90 7494,7 lm 99 lm/W
- /3 \_ 3500 K **G** CRI >90 5425,9 lm 71,8 lm/W

### Control

- 0887 \_ \_ / \_ A DALI-2, 1-10V, Push
- 0887 \_ \_ / \_ Z Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics


24 x LED 3,15W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol. 0,7280 m³  
Gross weight 25,25 Kg Net weight 20,25 Kg

### Notes

Built-in



# Algorithm Free


Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions. Can be customized to suit any space.


## Pendants

\* Built-in version

0820 \*0822



0820



### Finishes

- **18/ \_ \_ Graphite**  
(ADAPTA RF9913WX)
- **93/ \_ \_ White**  
(RAL 9016)

### LED temperature colour

- /1 \_ 2700 K **E** CRI >90 312,28 lm 90 lm/W
- /3 \_ 3500 K **F** CRI >90 312,3 lm 99,1 lm/W

### Control

- 0820 \_ / \_ A**  
DALI-2, 1-10V, Push
- 0820 \_ / \_ Z**  
Casambi

### Materials

Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

### Light Source and electronics

1 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

### Packaging

1 Box 0,18 x 0,55 x 0,55 m  
Vol 0,0131 m<sup>3</sup>  
Gross weight 2,17 Kg Net weight 1,57 Kg

### Notes

Surface.

Extra cable length. **16,00 €/m**

LED IP20 CE EAC Bi-volt

### Electrical connection


- Surface
- \_18** Free Wire
- \_23** Built-in
- \_31** Remote Micro for plaster ceilings
- \_32** Remote XXS for all types of drop ceilings



## 0822

| Finishes                              | LED temperature colour                            |
|---------------------------------------|---------------------------------------------------|
| ● 18/ _ Graphite<br>(ADAPTA RF9913WX) | /1_ 2700 K <b>E</b><br>CRI >90 312,28 lm 90 lm/W  |
| ● 93/ _ White<br>(RAL 9016)           | /3_ 3500 K <b>F</b><br>CRI >90 312,3 lm 99,1 lm/W |

| Control                             |
|-------------------------------------|
| 0822 _ / _ A<br>DALI-2, 1-10V, Push |
| 0822 _ / _ Z<br>Casambi             |



**Materials**  
Ball: Blowed glass. Glass fixation: Aluminum.  
Ceiling rose: Steel. Diffuser: PC. Pendant structure: Steel.

**Light Source and electronics**  
1 x LED 3,15 W 1050 mA  
Constant Current 1050 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,18 x 0,55 x 0,55 m  
Vol 0,0131 m³  
Gross weight 2,17 Kg Net weight 1,57 Kg


**Notes**  
Built-in.  
Extra cable length. 16,00 €/m  
**UNTIL STOCK RUNS OUT**

LED IP20 CE EAC   
Bi-volt ø 10,5 cm


# Composing pendants

Next sketches are composed by one or more compositions


---

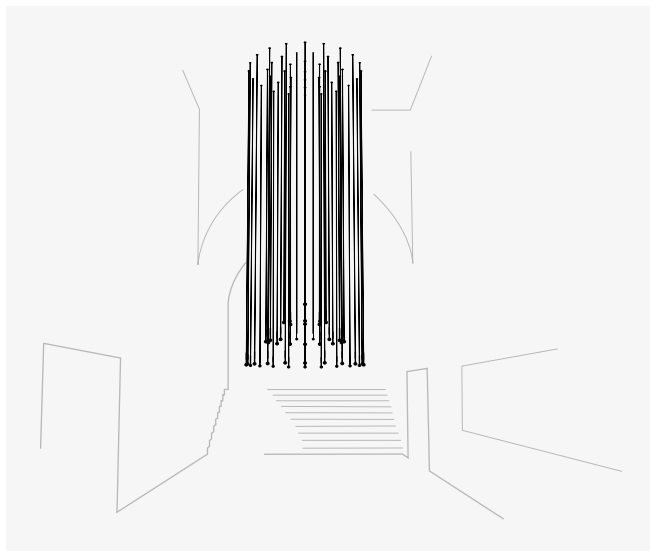

52 x 0820.

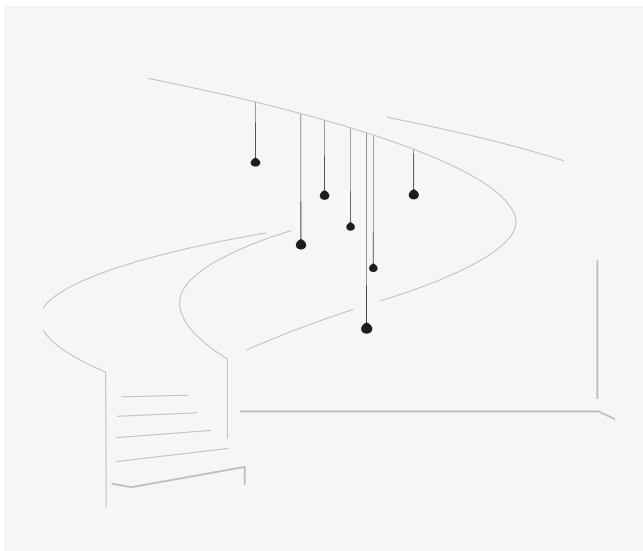

7 x 0820.

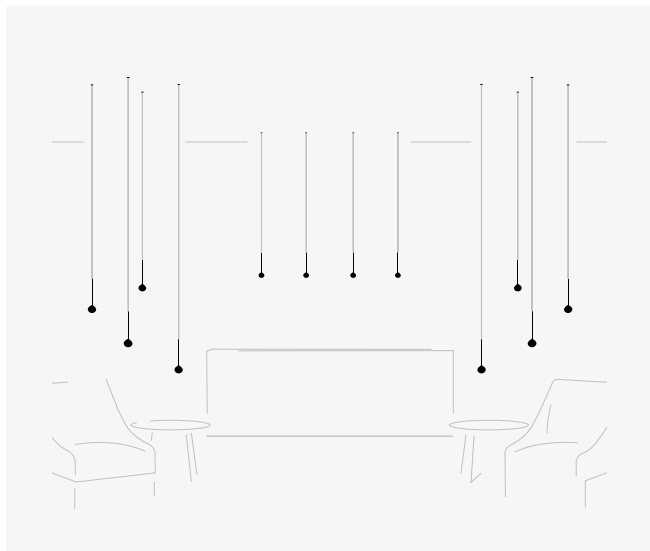

12 x 0820.

Each project is unique.  
Visit [vibia.com](https://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Algorithm composition quick  
and easy at [vibia.com](https://vibia.com)




# Electrical connection options for model 0820

## Drop ceiling


The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 0820

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.





---

## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 0820


### Surface



ø 19 cm  
match with  
fixture finish.





### Free Wire




ø 22 cm


you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.



ø 36 cm



ø 40 cm

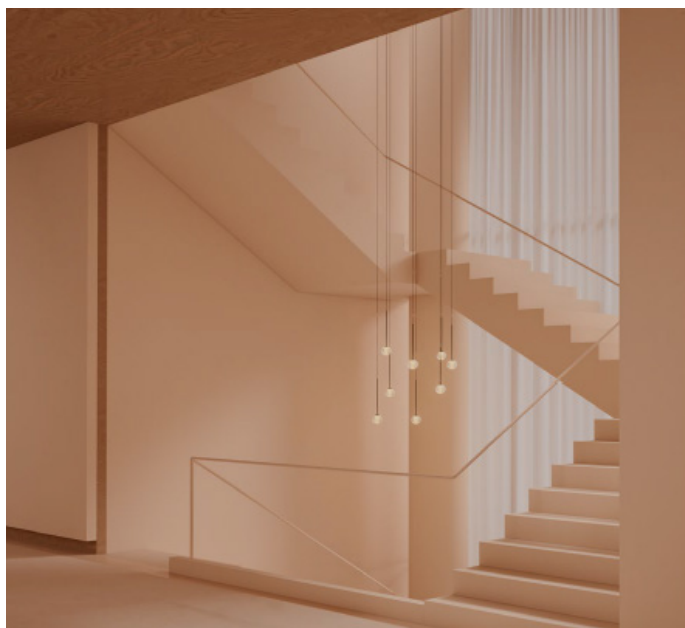

# Slim

Design by Jordi Vilardell

Elegant and magical, like drops of light falling from the sky, Slim's long, slender strands are suspended by fibre cords to draw the eye upwards.

## Pendants

0914

ø 40 cm



0915

ø 28 cm



0916

ø 40 cm



0917

ø 28 cm



0935

ø 69 cm




0937

53 x 26 cm



0920

ø 16 cm ø 16 cm



0925

ø 10 cm



0931

24 x 24 cm




0933

38 x 24 cm




0940

ø 100 cm

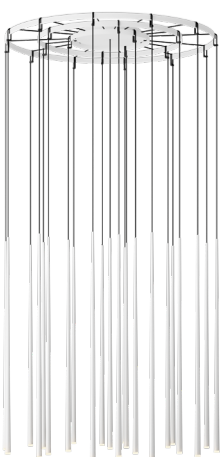

## 0914



| Finishes                                                       | LED temperature colour                                       |
|----------------------------------------------------------------|--------------------------------------------------------------|
| 03/ _ _ White fiber (RAL 9016)                                 | /1 _ 2700 K <input type="text"/> CRI >90 1268,54 lm 86 lm/W  |
| 04/ _ _ Black carbon fiber (Natural finish)                    | /2 _ 3000 K <input type="text"/> CRI >80 1142,4 lm 78 lm/W   |
| Finish customization (Available options: Vibia colour palette) | /3 _ 3500 K <input type="text"/> CRI >90 1453,5 lm 98,9 lm/W |

| Control                    |
|----------------------------|
| 0914 _ _ / _ 1 DALI-2      |
| 0914 _ _ / _ B 1-10V, Push |
| 0914 _ _ / _ Z Casambi     |

### Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

### Light Source and electronics

7 x LED 2,1 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

### Packaging


1 Box 0,78 x 0,45 x 0,25 m  
Vol 0,0877 m<sup>3</sup>  
Gross weight 10,2 Kg Net weight 6,8 Kg

### Notes

Surface  
Extra cable length. 16,00 €/m  
**UNTIL STOCK RUNS OUT**

LED IP20 CE EAC Bi-volt

## 0915



| Finishes                                                       | LED temperature colour                                      |
|----------------------------------------------------------------|-------------------------------------------------------------|
| 03/ _ _ White fiber (RAL 9016)                                 | /1 _ 2700 K <input type="text"/> CRI >90 724,88 lm 86 lm/W  |
| 04/ _ _ Black carbon fiber (Natural finish)                    | /2 _ 3000 K <input type="text"/> CRI >80 652,8 lm 78 lm/W   |
| Finish customization (Available options: Vibia colour palette) | /3 _ 3500 K <input type="text"/> CRI >90 830,6 lm 98,9 lm/W |

| Control                    |
|----------------------------|
| 0915 _ _ / _ 1 DALI        |
| 0915 _ _ / _ B 1-10V, Push |
| 0915 _ _ / _ Z Casambi     |

### Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

### Light Source and electronics

4 x LED 2,1 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

### Packaging


1 Box 0,78 x 0,45 x 0,25 m  
Vol 0,0877 m<sup>3</sup>  
Gross weight 6,4 Kg Net weight 3,6 Kg

### Notes

Surface  
Extra cable length. 16,00 €/m  
**UNTIL STOCK RUNS OUT**

LED IP20 CE EAC Bi-volt

0916



Finishes

03/ \_ \_ White fiber (RAL 9016)

04/ \_ \_ Black carbon fiber (Natural finish)

10/ \_ \_ White (NCS S 0300-N)

11/ \_ \_ Black (NCS S 8500-N)

24/ \_ \_ Beige M1 (NCS S 2005-Y50R)

37/ \_ \_ Terra Red (NCS S 4040-Y70R)

47/ \_ \_ Green L1 (NCS S 4005-G80Y)

68/ \_ \_ Ocre (NCS S 3050-Y30R)

Finish customization  
(Available options:  
Vibia colour palette)

LED temperature colour

/1 \_ 2700 K  CRI >90 1268,54 lm 86 lm/W

/2 \_ 3000 K  CRI >80 1142,4 lm 78 lm/W

/3 \_ 3500 K  CRI >90 1453,5 lm 98,9 lm/W

Control

0916 \_ \_ / \_ 1  
DALI

0916 \_ \_ / \_ B  
1-10V, Push

0916 \_ \_ / \_ Z  
Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

Light Source and electronics

7 x LED 2,1 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

Packaging


1 Box 0,22 x 0,48 x 1,20 m  
Vol 0,1278 m³  
Gross weight 13 Kg Net weight 9,6 Kg

Notes

Surface  
Extra cable length. 16,00 €/m  
03 and 04 finish: UNTIL STOCK RUNS OUT

  IP20    Bi-volt

0917



Finishes

03/ \_ \_ White fiber (RAL 9016)

04/ \_ \_ Black carbon fiber (Natural finish)

10/ \_ \_ White (NCS S 0300-N)

11/ \_ \_ Black (NCS S 8500-N)

24/ \_ \_ Beige M1 (NCS S 2005-Y50R)

37/ \_ \_ Terra Red (NCS S 4040-Y70R)

47/ \_ \_ Green L1 (NCS S 4005-G80Y)

68/ \_ \_ Ocre (NCS S 3050-Y30R)

Finish customization  
(Available options:  
Vibia colour palette)

LED temperature colour

/1 \_ 2700 K  CRI >90 724,88 lm 86 lm/W

/2 \_ 3000 K  CRI >80 652,8 lm 78 lm/W

/3 \_ 3500 K  CRI >90 830,6 lm 98,9 lm/W

Control

0917 \_ \_ / \_ 1  
DALI

0917 \_ \_ / \_ B  
1-10V, Push

0917 \_ \_ / \_ Z  
Casambi

Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

Light Source and electronics

4 x LED 2,1 W 700mA  
Constant Current 700 mA  
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m  
Vol 0,1278 m³  
Gross weight 8 Kg Net weight 5,2 Kg

Notes


Surface  
Extra cable length. 16,00 €/m  
03 and 04 finish: UNTIL STOCK RUNS OUT

  IP20    Bi-volt

84

Product specifications subject to change without notice. Please check [vibia.com](https://www.vibia.com) for updated information.

## 0920



- Finishes**
- 03/ \_ \_ White fiber (RAL 9016)
  - 04/ \_ \_ Black carbon fiber (Natural finish)
  - 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500-N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)
  - 68/ \_ \_ Ocre (NCS S 3050-Y30R)
- Finish customization**  
(Available options:  
Vibia colour palette)

- LED temperature colour**
- /1 \_ 2700 K **F** CRI >90 181,22 lm 86 lm/W
  - /2 \_ 3000 K **G** CRI >80 163,2 lm 78 lm/W
  - /3 \_ 3500 K **F** CRI >90 207,6 lm 98,9 lm/W

### Control

- 0920 \_ \_ / \_ 0  
On/ Off
- 0920 \_ \_ / \_ 1  
DALI
- 0920 \_ \_ / \_ B  
1-10V, Push
- 0920 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

### Packaging

1 Box 0,07 x 0,19 x 1,20 m  
Vol 0,0155 m³  
Gross weight 2,14 Kg Net weight 1,2 Kg

### Notes


Surface  
Extra cable length. 16,00 €/m  
03 and 04 finish: UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

### Electrical connection

Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote Micro for plaster ceilings  
\_32 Remote XXS for all types of drop ceilings

## 0925



- Finishes**
- 03/ \_ \_ White fiber (RAL 9016)
  - 04/ \_ \_ Black carbon fiber (Natural finish)
  - 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500-N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)
  - 68/ \_ \_ Ocre (NCS S 3050-Y30R)
- Finish customization**  
(Available options:  
Vibia colour palette)

- LED temperature colour**
- /1 \_ 2700 K **F** CRI >90 181,22 lm 86 lm/W
  - /2 \_ 3000 K **G** CRI >80 163,2 lm 78 lm/W
  - /3 \_ 3500 K **F** CRI >90 207,6 lm 98,9 lm/W

### Control

- 0925 \_ \_ / \_ 0  
On/ Off
- 0925 \_ \_ / \_ 1  
DALI
- 0925 \_ \_ / \_ B  
1-10V, Push
- 0925 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100-240V 50/60Hz

### Packaging


1 Box 0,17 x 0,19 x 1,21 m  
Vol 0,0370 m³  
Gross weight 2,48 Kg Net weight 1,35 Kg

### Notes

Built-in  
Extra cable length. 16,00 €/m  
03 and 04 finish: UNTIL STOCK RUNS OUT

LED IP20 CE EAC Bi-volt

## 0931



| Finishes                                                             | LED temperature colour                    |
|----------------------------------------------------------------------|-------------------------------------------|
| 03/ _ _ White fiber<br>(RAL 9016)                                    | /1 _ 2700 K<br>CRI >90 724,88 lm 86 lm/W  |
| 04/ _ _ Black<br>carbon fiber<br>(Natural finish)                    | /2 _ 3000 K<br>CRI >80 652,8 lm 78 lm/W   |
| 10/ _ _ White<br>(NCS S 0300-N)                                      | /3 _ 3500 K<br>CRI >90 830,6 lm 98,9 lm/W |
| 11/ _ _ Black<br>(NCS S 8500-N)                                      |                                           |
| 24/ _ _ Beige M1<br>(NCS S 2005-Y50R)                                |                                           |
| 37/ _ _ Terra Red<br>(NCS S 4040-Y70R)                               |                                           |
| 47/ _ _ Green L1<br>(NCS S 4005-G80Y)                                |                                           |
| 68/ _ _ Ocre<br>(NCS S 3050-Y30R)                                    |                                           |
| Finish customization<br>(Available options:<br>Vibia colour palette) |                                           |

## Control

0931 \_ \_ / \_ 1  
DALI

0931 \_ \_ / \_ B  
1-10V, Push

0931 \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

## Light Source and electronics

4 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

## Packaging

1 Box 0,22 x 0,48 x 1,20 m  
Vol 0,1267 m<sup>3</sup>  
Gross weight 8 Kg Net weight 5,2 Kg


## Notes

Surface

Extra cable length. 16,00 €/m

03 and 04 finish: UNTIL STOCK RUNS OUT

## 0933



| Finishes                                                             | LED temperature colour                     |
|----------------------------------------------------------------------|--------------------------------------------|
| 03/ _ _ White fiber<br>(RAL 9016)                                    | /1 _ 2700 K<br>CRI >90 1087,32 lm 86 lm/W  |
| 04/ _ _ Black<br>carbon fiber<br>(Natural finish)                    | /2 _ 3000 K<br>CRI >80 979,2 lm 78 lm/W    |
| 10/ _ _ White<br>(NCS S 0300-N)                                      | /3 _ 3500 K<br>CRI >90 1245,9 lm 98,9 lm/W |
| 11/ _ _ Black<br>(NCS S 8500-N)                                      |                                            |
| 24/ _ _ Beige M1<br>(NCS S 2005-Y50R)                                |                                            |
| 37/ _ _ Terra Red<br>(NCS S 4040-Y70R)                               |                                            |
| 47/ _ _ Green L1<br>(NCS S 4005-G80Y)                                |                                            |
| 68/ _ _ Ocre<br>(NCS S 3050-Y30R)                                    |                                            |
| Finish customization<br>(Available options:<br>Vibia colour palette) |                                            |

## Control

0933 \_ \_ / \_ 1  
DALI

0933 \_ \_ / \_ B  
1-10V, Push

0933 \_ \_ / \_ Z  
Casambi

## Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

## Light Source and electronics

6 x LED 2,1 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

## Packaging

1 Box 0,22 x 0,48 x 1,20 m  
Vol 0,1267 m<sup>3</sup>  
Gross weight 12,5 Kg Net weight 9,1 Kg


## Notes

Surface

Extra cable length. 16,00 €/m

03 and 04 finish: UNTIL STOCK RUNS OUT

## 0935



- Finishes**
- 03/ \_ \_ White fiber (RAL 9016)
  - 04/ \_ \_ Black carbon fiber (Natural finish)
  - 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500-N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)
  - 68/ \_ \_ Ocre (NCS S 3050-Y30R)

**Finish customization**  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1 \_ 2700 K CRI >90 954,5 lm 95 lm/W
- /2 \_ 3000 K CRI >80 1140 lm 114 lm/W
- /3 \_ 3500 K CRI >90 1093,7 lm 109,4 lm/W

### Control

- 0935 \_ \_ / \_ 1 DALI-2
- 0935 \_ \_ / \_ B 1-10V, Push
- 0935 \_ \_ / \_ Z Casambi

### Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

### Light Source and electronics

10 x LED 1 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging


1 Box 1,14 x 1,14 x 0,34 m  
Vol 0,4410 m<sup>3</sup>  
Gross weight 19,2 Kg Net weight 14,2 Kg

### Notes

Surface  
Extra cable length. 16,00 €/m  
**03 and 04 finish: UNTIL STOCK RUNS OUT**

LED IP20 CE EAC Bi-volt

## 0937



- Finishes**
- 03/ \_ \_ White fiber (RAL 9016)
  - 04/ \_ \_ Black carbon fiber (Natural finish)
  - 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500-N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)
  - 68/ \_ \_ Ocre (NCS S 3050-Y30R)

**Finish customization**  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1 \_ 2700 K CRI >90 2355,86 lm 86 lm/W
- /2 \_ 3000 K CRI >80 2121,6 lm 78 lm/W
- /3 \_ 3500 K CRI >90 2699,4 lm 98,9 lm/W

### Control

- 0937 \_ \_ / \_ 1 DALI-2
- 0937 \_ \_ / \_ A DALI, 1-10V, Push
- 0937 \_ \_ / \_ Z Casambi

### Materials

Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

### Light Source and electronics

13 x LED 2,1W 700mA  
Constant Current 700 mA  
110~240V 50/60Hz

### Packaging


1 Box 0,22 x 0,48 x 1,20 m  
Vol 0,1267 m<sup>3</sup>  
Gross weight 12,5 Kg Net weight 18,46 Kg

### Notes

Surface  
Extra cable length. 16,00 €/m  
**03 and 04 finish: UNTIL STOCK RUNS OUT**

LED IP20 CE EAC Bi-volt

0940



**Finishes**

- 03/ \_ \_ White fiber (RAL 9016)
- 04/ \_ \_ Black carbon fiber (Natural finish)
- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)
- 68/ \_ \_ Ocre (NCS S 3050-Y30R)

**Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**

- /1 \_ 2700 K CRI >90 2099,9 lm 95 lm/W
- /2 \_ 3000 K CRI >80 2508 lm 114 lm/W
- /3 \_ 3500 K CRI >90 2406,1 lm 109,4 lm/W

**Control**

- 0940 \_ \_ / \_ 1 DALI
- 0940 \_ \_ / \_ B 1-10V, Push
- 0940 \_ \_ / \_ Z Casambi

**Materials**  
Diffuser: Glass. Body: Fiberglass / Carbon fiber.  
Canopy Plate: Steel.

**Light Source and electronics**  
22 x LED 1 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

**Packaging**  
1 Box 1,14 x 1,14 x 0,34 m  
Vol 0,4420 m³  
Gross weight 29,9 Kg Net weight 21,9 Kg

**Notes**  
Surface  
Extra cable length. 16,00 €/m  
**03 and 04 finish: UNTIL STOCK RUNS OUT**

LED

IP20

EAC

Bi-volt







# Composing pendants

Next sketches are composed by one or more compositions


---

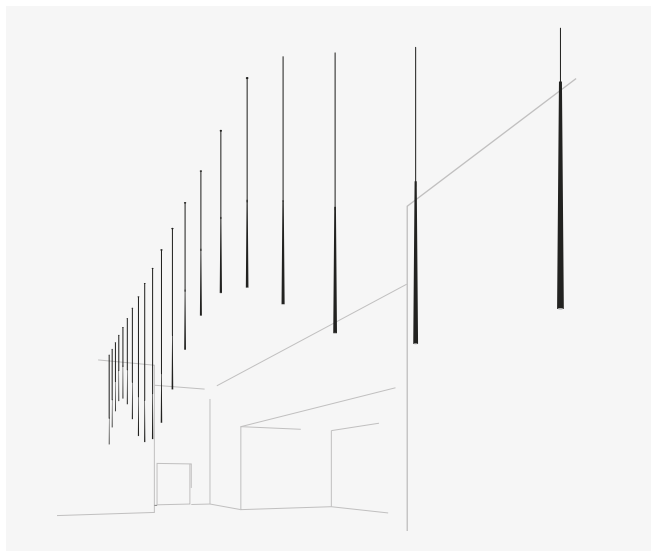

22 x 0920.

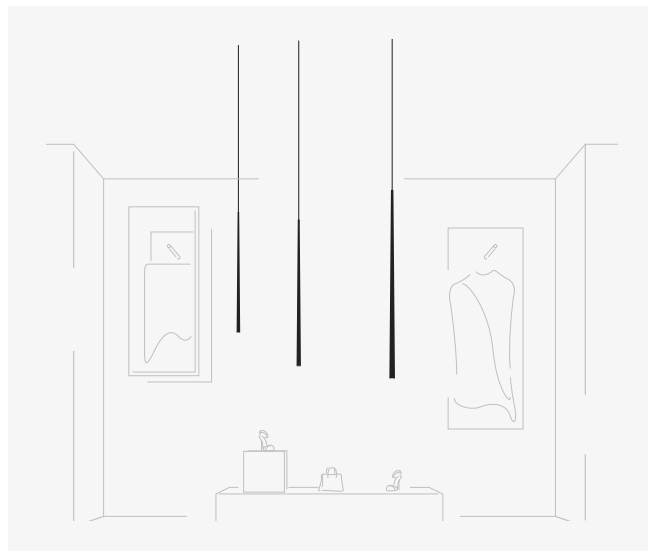

3 x 0920.

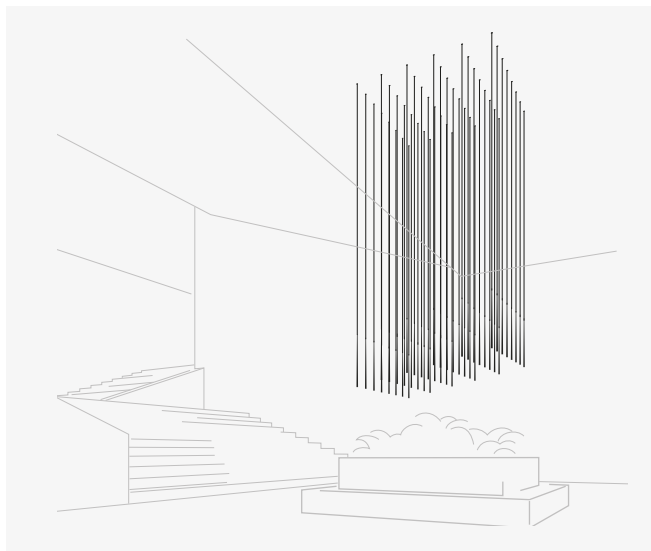

40 x 0920.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Slim composition quick  
and easy at [vibia.com](http://vibia.com)

# Electrical connection options for models 0920


Choose your preferred installation option according to your needs.  
For each composition, the optimal minimum number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 0920 \_\_ /10 / 0920 \_\_ /1B

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.



---

## Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.


For Ref. 0920\_\_/10

### Surface




ø 17,3 cm  
match with  
fixture finish.


### Free Wire



ø 20 cm



ø 36 cm



ø 40 cm

---


For Ref. 0920\_\_/1B

### Surface




ø 20 cm  
match with  
fixture finish.


### Free Wire



ø 20 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.



# Scotch

Design by Oscar & Sergi Devesa

Evoking a sleek ice sculpture, Scotch is at once strong and subtle. Crafted of a thick, pressed-glass diffuser with a frosted-glass interior, its spherical design provides an understated accent and a warm glow.

## Ceiling Wall Outdoor

0960




ø 12 cm

0962



ø 12 cm

0960



### Finishes

01 Chrome  
(Metallic finish)

LED 2700 K 470 lm/W

0960 01

### Materials

Diffuser: Glass. Body: Zamak.

### Light Source and electronics

1 x LED G9 230V 3,8 W

### Packaging


1 Box 0,22x0,22x0,24 m

Vol 0,0116 m<sup>3</sup>

Gross weight 2,5 Kg Net weight 1,7 Kg

IP20 CE EAC Bi-volt

0962



### Finishes

01/ \_ \_ Chrome  
(Metallic finish)

### LED temperature colour

/1\_ 2700 K  
CRI >90 341,1 lm 114 lm/W

### Control

0962 01 / 10

On/ Off

### Materials

Diffuser: Glass. Body: Zamak.

### Light Source and electronics

1 x LED 3 W 350 mA.  
Constant Current 350 mA  
100~240V 50/60Hz

### Packaging

1 Box 0,22x0,22x0,24 m

Vol 0,0116 m<sup>3</sup>

Gross weight 2,5 Kg Net weight 1,7 Kg

LED IP65 CE EAC Bi-volt




# Quadra Ice


Classic and timeless silhouette.  
Minimal presence. Integrates readily.

## Ceiling


1128 1138




1129 1139




1132 1133

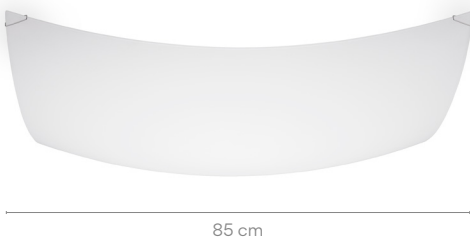


1134

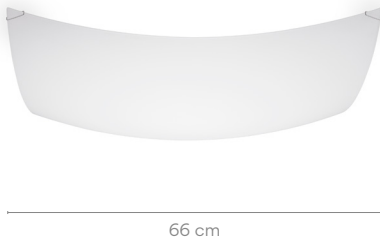

|                                                                                                 |                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1128</p>  | <p>Finishes</p> <p>● 00 White glass<br/>(RAL 9016)</p> <hr/> <p>Materials</p> <p>Ceiling support: Steel. Diffuser: Glass.</p> <p>Light Source and electronics</p> <p>1 x R7s 80mm 230V 120 W Eco Max</p> | <p>1128 00</p> <hr/> <p>Packaging</p> <p>1 Box 0,21 x 0,41 x 0,41 m<br/>Vol 0,0353 m³<br/>Gross weight 2,24 Kg Net weight 1,44 Kg</p> <p>Notes</p> <p>UNTIL STOCK RUNS OUT</p> <p>    Bi-volt</p> |
|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

1129



Finishes

● 00 White glass  
(RAL 9016)

Materials

Ceiling support: Steel. Diffuser: Glass.

Light Source and electronics

1 x R7s 117mm 230V 230 W Eco Max

1129 00

Packaging


1 Box 0,22 x 0,46 x 0,46 m  
Vol 0,0465 m<sup>3</sup>  
Gross weight 3 Kg Net weight 2,95 Kg

Notes

UNTIL STOCK RUNS OUT



1132



Finishes

● 00 White glass  
(RAL 9016)

Materials

Ceiling support: Steel. Diffuser: Glass.

Light Source and electronics

1 x 2GX13 230V 22 W (T5C)  
1 x 2GX13 230V 40 W (T5C)

1132 00

Packaging


1 Box 0,27 x 0,76 x 0,76 m  
Vol 0,1560 m<sup>3</sup>  
Gross weight 8,4 Kg Net weight 5,5 Kg

Notes

UNTIL STOCK RUNS OUT



1133



Finishes

● 00 White glass  
(RAL 9016)

Materials

Ceiling support: Steel. Diffuser: Glass.

Light Source and electronics

1 x R7s 117mm 230V 230 W Eco Max

1133 00

Packaging


1 Box 0,27 x 0,76 x 0,76 m  
Vol 0,1560 m<sup>3</sup>  
Gross weight 7,6 Kg Net weight 4,5 Kg

Notes

UNTIL STOCK RUNS OUT



1134



Finishes

● 00 White glass  
(RAL 9016)

Materials

Ceiling support: Steel. Diffuser: Glass.

Light Source and electronics

1 x R7s 117mm 230V 230 W Eco Max.

1134 00


Packaging


1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m<sup>3</sup>  
Gross weight 6,2 Kg Net weight 4,2 Kg

Notes

UNTIL STOCK RUNS OUT



|      |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                            |                                                            |
|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| 1138 |  | <b>Finishes</b><br>● 00/ _ _ White glass<br>(RAL 9016)                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>LED temperature colour</b><br>/1_ 2700 K <br>CRI >90 1637,0 lm 99 lm/W | <b>Control</b><br>1138 _ _ / _ 1<br>DALI-2                 |
|      |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                            | 1138 _ _ / _ B<br>1-10V, Push<br>1138 _ _ / _ Z<br>Casambi |
|      |                                                                                   | <b>Materials</b><br>Ceiling support: Steel. Diffuser: Glass.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>Packaging</b><br>1 Box 0,21 x 0,41 x 0,41 m<br>Vol 0,0353 m³<br>Gross weight 2,24 Kg Net weight 1,65 Kg                                                 |                                                            |
|      |                                                                                   | <b>Light Source and electronics</b><br>1 x LED PLATE 16,5 W 500 mA<br>Constant Current 500 mA<br>110-240V 50/60Hz                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>Notes</b><br>UNTIL STOCK RUNS OUT                                                                                                                       |                                                            |
|      |                                                                                   |   IP20     Bi-volt |                                                                                                                                                            |                                                            |

|      |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                            |                                                            |
|------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| 1139 |  | <b>Finishes</b><br>● 00/ _ _ White glass<br>(RAL 9016)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>LED temperature colour</b><br>/1_ 2700 K <br>CRI >90 2203,0 lm 95 lm/W | <b>Control</b><br>1139 _ _ / _ 1<br>DALI-2                 |
|      |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                            | 1139 _ _ / _ B<br>1-10V, Push<br>1139 _ _ / _ Z<br>Casambi |
|      |                                                                                     | <b>Materials</b><br>Ceiling support: Steel. Diffuser: Glass.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>Packaging</b><br>1 Box 0,22 x 0,46 x 0,46 m<br>Vol 0,0465 m³<br>Gross weight 3 Kg Net weight 2,3 Kg                                                     |                                                            |
|      |                                                                                     | <b>Light Source and electronics</b><br>1 x LED PLATE 23,1 W 700 mA<br>Constant Current 700 mA<br>110-240V 50/60Hz                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>Notes</b><br>UNTIL STOCK RUNS OUT                                                                                                                       |                                                            |
|      |                                                                                     |   IP20     Bi-volt |                                                                                                                                                            |                                                            |






# Top

Design by Ramos & Bassols

Soft, spherical shapes and a warm luminescence characterize the Top collection. Its glowing epicenter is encircled by a larger ring, lending the look of framing the light within its pure geometry.

## Ceiling Wall

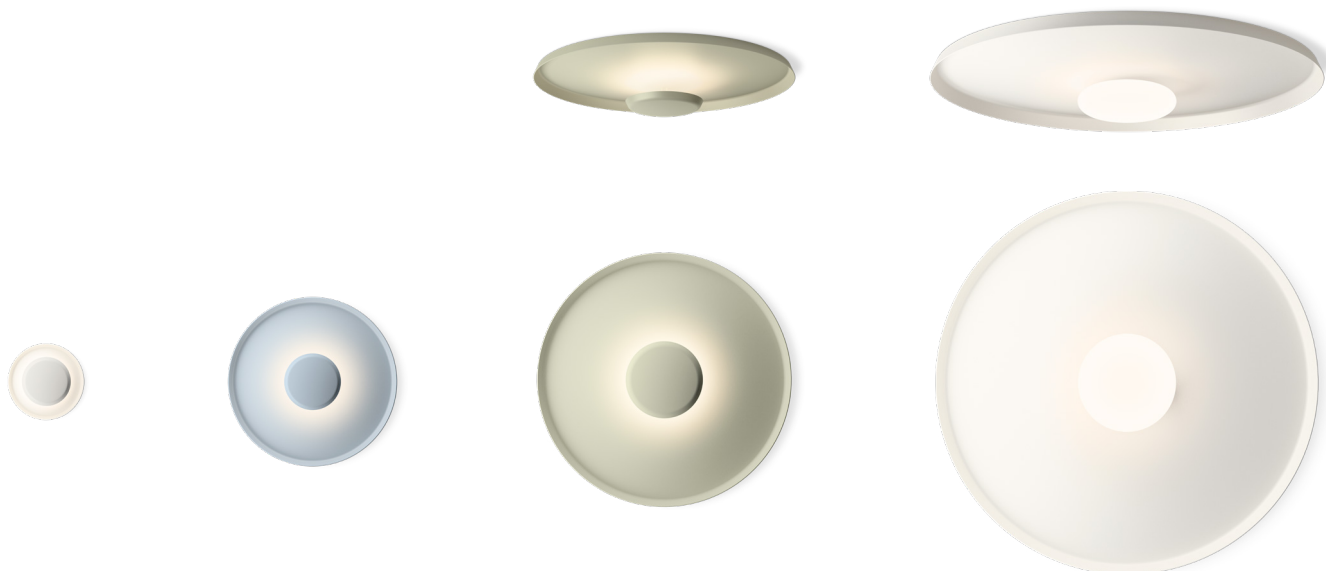

1154

ø 17 cm

1155



ø 40 cm

1160

ø 60 cm


1170

ø 90 cm

|                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>1154</b></p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>10/ _ _ White (NCS S 0300-N)</li> <li>36/ _ _ Soft pink (NCS S 1010-Y50R)</li> <li>40/ _ _ Blue L1 (NCS S 3010-B)</li> <li>47/ _ _ Green L1 (NCS S 4005-G80Y)</li> </ul> <p><b>Temperatura de color LED</b></p> <p>/1 _ 2700 K  CRI &gt;90 550 lm 100 lm/W</p> <p>/3 _ 3500 K  CRI &gt;90 540,2 lm 98,2 lm/W</p> <p><b>Materials</b></p> <p>Body: Aluminum.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED PLATE 5,5 W 150 mA<br/>Constant Current 150 mA<br/>100~240V 50/60Hz</p>   | <p><b>Control</b></p> <p>1154 _ _ / _ 0<br/>On/ Off</p> <hr/> <p><b>Packaging</b></p> <p>1 Box 0,2 x 0,2 x 0,1 m<br/>Vol 0,004 m³<br/>Gross weight 0,8 Kg Net weight 0,5 Kg</p> <p>   </p> |
| <p><b>1155</b></p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>10/ _ _ White (NCS S 0300-N)</li> <li>36/ _ _ Soft pink (NCS S 1010-Y50R)</li> <li>40/ _ _ Blue L1 (NCS S 3010-B)</li> <li>47/ _ _ Green L1 (NCS S 4005-G80Y)</li> </ul> <p><b>Temperatura de color LED</b></p> <p>/1 _ 2700 K  CRI &gt;90 2050 lm 112 lm/W</p> <p>/3 _ 3500 K  CRI &gt;90 2013,4 lm 110 lm/W</p> <p><b>Materials</b></p> <p>Body: Aluminum.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED PLATE 18,3 W 500 mA<br/>Constant Current 500 mA<br/>220~240V 50/60Hz</p> | <p><b>Control</b></p> <p>1155 _ _ / _ 1<br/>DALI-2</p> <p>1155 _ _ / _ B<br/>1-10V, Push</p> <p>1155 _ _ / _ Z<br/>Casambi</p> <hr/> <p><b>Packaging</b></p> <p>1 Box 0,45 x 0,45 x 0,15 m<br/>Vol 0,03 m³<br/>Gross weight 1,8 Kg Net weight 1,5 Kg</p> <p>  </p>              |



## 1160



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 36/ \_ \_ Soft pink (NCS S 1010-Y50R)
- 40/ \_ \_ Blue L1 (NCS S 3010-B)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

### LED temperature colour

- /1 \_ 2700 K CRI >90 2880 lm 109 lm/W
- /3 \_ 3500 K CRI >90 2828,6 lm 107,1 lm/W

### Control

- 1160 \_ \_ / \_ A DALI-2, 1-10V, Push
- 1160 \_ \_ / \_ Z Casambi

### Materials


Body: Aluminum.

Light Source and electronics  
1 x LED PLATE 26,4 W 700 mA  
Constant Current 700 mA  
220-240V 50/60Hz

### Packaging

1 Box 0,65 x 0,65 x 0,15 m  
Vol 0,063 m<sup>3</sup>  
Gross weight 3,13 Kg Net weight 2,5 Kg

## 1170



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 36/ \_ \_ Soft pink (NCS S 1010-Y50R)
- 40/ \_ \_ Blue L1 (NCS S 3010-B)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

### LED temperature colour

- /1 \_ 2700 K CRI >90 4056,81 lm 101 lm/W
- /3 \_ 3500 K CRI >90 4243,6 lm 105,6 lm/W

### Control

- 1170 \_ \_ / \_ A DALI-2, 1-10V, Push
- 1170 \_ \_ / \_ Z Casambi

### Materials

Body: Aluminum. Diffuser: Triplex Opal Glass.

Light Source and electronics  
13 x LED 13,4 W 700 mA  
Constant Current 700 mA  
220-240V 50/60Hz

### Packaging


1 Box 1 x 1 x 0,2 m  
Vol 0,02 m<sup>3</sup>  
Gross weight 7,7 Kg Net weight 5,3 Kg

# Jazz


Design by Diego Fortunato

Sculptural design with a marked sensual but strong character.  
Ancestral forms converted into modern design icons.

## Floor Table

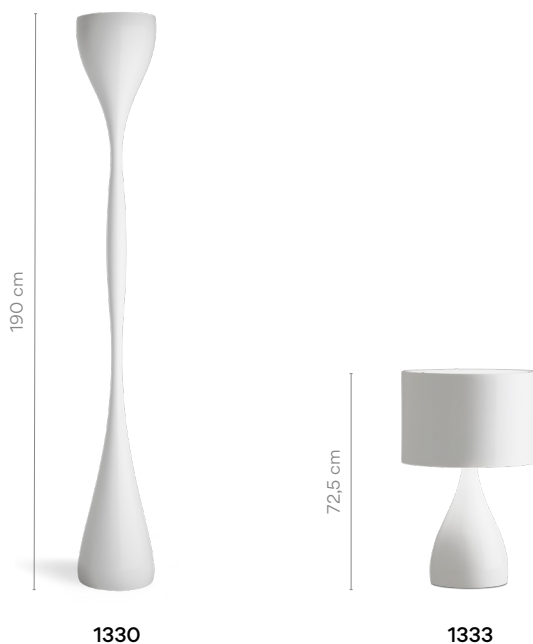

### 1330



#### Finishes

- 10 White (NCS S 0300-N)
- 25 Beige D1 (NCS S 4005-Y50R)
- 45 Blue D1 (NCS S 7010-B10G)

#### Materials

Body: Polyurethane. Diffuser: Polycarbonate.

#### Light Source and electronics

1 x R7s 117mm 230V 230 W Eco

### 1330 \_\_

#### Packaging


2 Boxes 0,45 x 0,80 x 0,20 m  
Total Vol 0,1880 m<sup>3</sup>  
Gross weight 19,8 Kg Net weight 15 Kg

#### Notes

Dimmer on the cable. Electric cable 2,5 m



### 1333



#### Finishes

- 10 White (NCS S 0300-N)
- 25 Beige D1 (NCS S 4005-Y50R)
- 45 Blue D1 (NCS S 7010-B10G)

LED 700 K 1520 lm/W

### 1333 \_\_

#### Materials

Body: Polyurethane. Diffuser: Optical-glass.  
Shade: Aluminum.

#### Light Source and electronics

4 x LED E27 230V 12 W

#### Packaging

1 Box 0,51 x 0,51 x 1,14 m  
Vol 0,2960 m<sup>3</sup>  
Gross weight 10 Kg Net weight 7,9 Kg

#### Notes

Switch on the cable. Electric cable 1,5 m





# Flamingo

Design by Antoni Arola

Displaying the elegant poise of the bird that inspired it, Flamingo projects a feeling of weightlessness hovering overhead. The deconstructed design separates the LED light source from its translucent shades, producing gradations of diffuse illumination.

## Pendants

**1510**

ø 70 cm



**1515**

ø 70 cm



**1527**

ø 90 cm




**1530**

ø 90 cm



**1540**

ø 90 cm



**1550**

ø 90 cm



**1560**

ø 90 cm




**1570**

ø 90 cm





## 1510



**Finishes**

- 18/ \_ \_ Graphite (RAL 7016)
- 20/ \_ \_ Gold (Gold)
- 67/ \_ \_ Copper (Copper)
- 93/ \_ \_ White (RAL 9016)

**LED temperature colour**

- /1 \_ 2700 K CRI >90 1108,02 lm 99 lm/W
- /3 \_ 3500 K CRI >90 1278,8 lm 114,2 lm/W

### Control

1510 \_ \_ / \_ 1  
DALI-2

1510 \_ \_ / \_ B  
1-10V, Push

1510 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Methacrylate. Shade: Acrylic.  
Body: Aluminum. Canopy and rods: Steel.

### Light Source and electronics

2 x LED 5,6 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz


### Packaging

2 Boxes  
Total Vol 0,1320 m<sup>3</sup>  
Gross weight 8,7 Kg Net weight 7,8 Kg

### Notes

Extra cable length. 16,00 €/m

## 1515



**Finishes**

- 18/ \_ \_ Graphite (RAL 7016)
- 20/ \_ \_ Gold (Gold)
- 67/ \_ \_ Copper (Copper)
- 93/ \_ \_ White (RAL 9016)

**LED temperature colour**

- /1 \_ 2700 K CRI >90 1108,02 lm 99 lm/W
- /3 \_ 3500 K CRI >90 1278,8 lm 114,2 lm/W

### Control

1515 \_ \_ / \_ 5  
Push

### Materials

Diffuser: Methacrylate. Shade: Acrylic.  
Body: Aluminum. Canopy and rods: Steel.

### Light Source and electronics

2 x LED 5,6 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz


### Packaging

2 Boxes  
Total Vol 0,0620 m<sup>3</sup>  
Gross weight 7,2 Kg Net weight 5,2 Kg

### Notes

Dimmer on the cable. Electric cable 2,5 m  
Extra cable length. 16,00 €/m

## 1527



**Finishes**

- 18/ \_ \_ Graphite (RAL 7016)
- 20/ \_ \_ Gold (Gold)
- 67/ \_ \_ Copper (Copper)
- 93/ \_ \_ White (RAL 9016)

**LED temperature colour**

- /1 \_ 2700 K CRI >90 1108,02 lm 99 lm/W
- /3 \_ 3500 K CRI >90 1278,8 lm 114,2 lm/W

### Control

1527 \_ \_ / \_ 1  
DALI-2

1527 \_ \_ / \_ B  
1-10V, Push

1527 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Methacrylate. Shade: Acrylic.  
Body: Aluminum. Canopy and rods: Steel.

### Light Source and electronics


2 x LED 5,6 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz

### Packaging

1 Box 0,12 x 0,80 x 0,79 m  
Vol 0,0634 m<sup>3</sup>  
Gross weight 4,1 Kg Net weight 3,69 Kg


### Notes

Extra cable length. 16,00 €/m

|                                                                                                   |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>1530</div>  | <div>Finishes</div> <div><div><div></div><div>18/ _ _ Graphite</div><div>(RAL 7016)</div></div><div><div></div><div>20/ _ _ Gold</div><div>(Gold)</div></div><div><div></div><div>67/ _ _ Copper</div><div>(Copper)</div></div><div><div></div><div>93/ _ _ White</div><div>(RAL 9016)</div></div></div> | <div>LED temperature colour</div> <div><div>/1 _ 2700 K </div><div>CRI &gt;90 1662,03 lm 99 lm/W</div></div> <div><div>/3 _ 3500 K </div><div>CRI &gt;90 1918,2 lm 114,2 lm/W</div></div> |
|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## 1560



**Finishes**

- 18/ \_ Graphite (RAL 7016)
- 20/ \_ Gold (Gold)
- 67/ \_ Copper (Copper)
- 93/ \_ White (RAL 9016)

**LED temperature colour**

- /1 \_ 2700 K CRI >90 1662,03 lm 99 lm/W
- /3 \_ 3500 K CRI >90 1918,2 lm 114,2 lm/W

### Control

1560 \_ / \_ 1  
DALI-2

1560 \_ / \_ B  
1-10V, Push

1560 \_ / \_ Z  
Casambi

### Materials

Diffuser: Methacrylate. Shade: Acrylic.  
Body: Aluminum. Canopy and rods: Steel.

### Light Source and electronics

3 x LED 5,6 W 500 mA  
Constant Current 500 mA  
220-240V 50/60Hz

### Packaging


3 Boxes  
Total Vol 0,1860 m³  
Gross weight 12,7 Kg Net weight 10,2 Kg

### Notes

Extra cable length. 16,00 €/m

LED IP20 CE EAC

## 1570

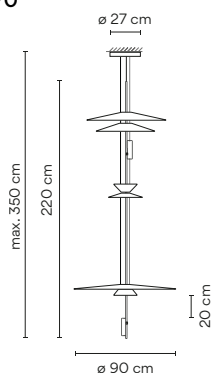

**Finishes**

- 18/ \_ Graphite (RAL 7016)
- 20/ \_ Gold (Gold)
- 67/ \_ Copper (Copper)
- 93/ \_ White (RAL 9016)

**LED temperature colour**

- /1 \_ 2700 K CRI >90 2216,04 lm 99 lm/W
- /3 \_ 3500 K CRI >90 2557,6 lm 114,2 lm/W

### Control

1570 \_ / \_ 1  
DALI-2

1570 \_ / \_ B  
1-10V, Push

1570 \_ / \_ Z  
Casambi

### Materials

Diffuser: Methacrylate. Shade: Acrylic.  
Body: Aluminum. Canopy and rods: Steel.

### Light Source and electronics

4 x LED 5,6 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,1633 m³  
Gross weight 10 Kg Net weight 8,64 Kg

### Notes

Extra cable length. 16,00 €/m

LED IP20 CE EAC



# Pin


Design by Ichiro Iwasaki

Through the exploration of “eternal comfort” in lighting environments PIN aims to provide something new and original yet in harmony with both the old and the contemporary.

## Table



### 1650



- Finishes**
- 04/ \_ \_ Black (NCS 9000N)
  - 58/ \_ \_ Cream (NCS S 2005-Y20R)
  - 62/ \_ \_ Green (NCS S 3010-G20Y)
  - 93/ \_ \_ White (NCS S 0502-Y)
- Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 485 lm 121 lm/W

**Control**  
1650 \_ / \_ 0  
On/ Off


**Materials**  
Head: Aluminum. Base: Zamak.  
Diffuser: Polycarbonate. Rod: Steel.

**Light Source and electronics**  
1x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,174 x 0,212 x 0,713 m  
Vol 0,0212 m³  
Gross weight 2,94 Kg Net weight 2 Kg

**Notes**  
Switch on the base. Electric cable 3 m.

### 1655



- Finishes**
- 04/ \_ \_ Black (NCS 9000N)
  - 58/ \_ \_ Cream (NCS S 2005-Y20R)
  - 62/ \_ \_ Green (NCS S 3010-G20Y)
  - 93/ \_ \_ White (NCS S 0502-Y)
- Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 485 lm 121 lm/W

**Control**  
1655 \_ / \_ 0  
On/ Off

**Materials**  
Head: Aluminum. Base: Zamak.  
Diffuser: Polycarbonate. Rod: Steel.

**Light Source and electronics**  
1x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz


**Packaging**  
1 Box 0,20 x 0,357 x 0,67 m  
Vol 0,0480 m³  
Gross weight 3,68 Kg Net weight 2,2 Kg

**Notes**  
Switch on the base. Electric cable 3 m.




Floor



|                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>1660</b></p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"><li>04/ _ _ Black (NCS 9000N)</li><li>58/ _ _ Cream (NCS S 2005-Y20R)</li><li>62/ _ _ Green (NCS S 3010-G20Y)</li><li>93/ _ _ White (NCS S 0502-Y)</li></ul> <p><b>Finish customization</b><br/>(Available options:<br/>Vibia colour palette)</p> <hr/> <p><b>Materials</b><br/>Head: Aluminum. Base: Zamak.<br/>Diffuser: Polycarbonate. Rod: Steel.</p> <p><b>Light Source and electronics</b><br/>1 x LED 4,5 W 350 mA<br/>Constant Current 350 mA<br/>100~240V 50/60Hz</p> | <p><b>LED temperature colour</b><br/>/1 _ 2700 K <br/>CRI &gt;90 485 lm 121 lm/W</p> <p><b>Control</b><br/><b>1660 _ _ / _ 0</b><br/>On/ Off</p> <hr/> <p><b>Packaging</b><br/>1 Box 0,149 x 0,265 x 0,33 m<br/>Vol 0,1310 m³<br/>Gross weight 7,45 Kg Net weight 3,8 Kg</p> <p><b>Notes</b><br/>Switch on the base. Electric cable 3 m.</p> <p>    </p> |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## 1665



### Finishes

- 04/ \_ \_ Black (NCS 9000N)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)
- 93/ \_ \_ White (NCS S 0502-Y)

Finish customization  
(Available options:  
Vibia colour palette)

### LED colour temperature

/1\_ 2700 K   
CRI >90 980,5 lm 109 lm/W

### Control

1665 \_ \_ / \_ 0  
On/ Off

### Materials

Head: Aluminum. Base: Zamak.  
Diffuser: Polycarbonate. Rod: Steel.

### Light Source and electronics

2 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

### Packaging

1 Box 1,496 x 0,265 x 0,33 m  
Vol 0,1310 m³  
Gross weight 8,25 Kg Net weight 4,6 Kg


### Notes

Switch on the base. Electric cable 3 m.

**UNTIL STOCK RUNS OUT**

LED  IP20  EAC  Bi-volt

## 1670

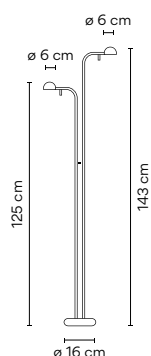

### Finishes

- 04/ \_ \_ Black (NCS 9000N)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)
- 93/ \_ \_ White (NCS S 0502-Y)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

/1\_ 2700 K   
CRI >90 970 lm 121 lm/W

### Control

1670 \_ \_ / \_ 0  
On/ Off

### Materials

Head: Aluminum. Base: Zamak.  
Diffuser: Polycarbonate. Rod: Steel.

### Light Source and electronics

2 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

### Packaging


1 Box 1,496 x 0,265 x 0,33 m  
Vol 0,1310 m³  
Gross weight 8,25 Kg Net weight 4,6 Kg

### Notes

Switch on the base. Electric cable 3 m.

LED  IP20  EAC  Bi-volt

Wall



ø 10 cm

1675 62



ø 10 cm

1675 04



ø 10 cm

1675 58



ø 10 cm

1675 93



ø 10 cm

1680



ø 10 cm

1685



ø 10 cm

1686




ø 10 cm

1690



ø 10 cm

1692

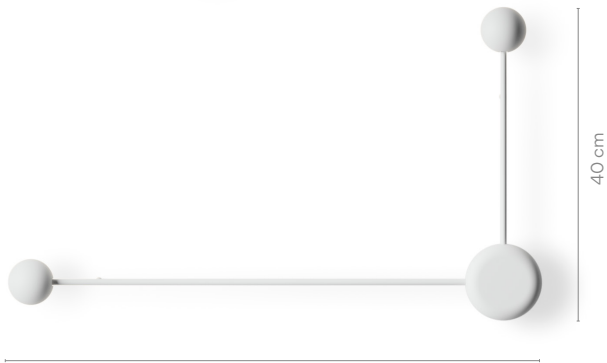


70 cm

1694



1675



Finishes

- 04/ \_ \_ Black (NCS 9000N)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)
- 93/ \_ \_ White (NCS S 0502-Y)

Finish customization  
(Available options:  
Vibia colour palette)

LED temperature colour

/1\_ 2700 K CRI >90 485 lm 121 lm/W

Control

1675 \_ \_ / \_ 0  
On/ Off

Materials

Head: Aluminum. Base: Zamak.  
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz


Packaging

1 Box 0,193 x 0,148 x 0,161 m  
Vol 0,0046 m<sup>3</sup>  
Gross weight 0,85 Kg Net weight 0,6 Kg

Notes

Switch on the wall plate

1680



Finishes

- 04/ \_ \_ Black (NCS 9000N)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)
- 93/ \_ \_ White (NCS S 0502-Y)

Finish customization  
(Available options:  
Vibia colour palette)

LED temperature colour

/1\_ 2700 K CRI >90 485 lm 121 lm/W

Control

1680 \_ \_ / \_ 0  
On/ Off

Materials

Head: Aluminum. Base: Zamak.  
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz


Packaging

1 Box 0,146 x 0,355 x 0,473 m  
Vol 0,0250 m<sup>3</sup>  
Gross weight 1,745 Kg Net weight 1 Kg

Notes

Switch on the wall plate

1685



Finishes

- 04/ \_ \_ Black (NCS 9000N)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)
- 93/ \_ \_ White (NCS S 0502-Y)

Finish customization  
(Available options:  
Vibia colour palette)

LED temperature colour

/1\_ 2700 K CRI >90 970 lm 121 lm/W

Control

1685 \_ \_ / \_ 0  
On/ Off

Materials

Head: Aluminum. Base: Zamak.  
Diffuser: Polycarbonate. Rod: Steel.

Light Source and electronics


2 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

1 Box 0,177 x 0,445 x 0,792 m  
Vol 0,0620 m<sup>3</sup>  
Gross weight 2,64 Kg Net weight 1,2 Kg

Notes

Switch on the wall plate

|                                                                                                              |                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>1686</div> <div></div> | <div>Finishes</div> <div><div><div></div>04/ _ _ Black</div><div>(NCS 9000N)</div></div> <div><div></div>58/ _ _ Cream</div> <div>(NCS S 2005-Y20R)</div> |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|

62/ \_ \_ Green

(NCS S 3010-G20Y)

93/ \_ \_ White

(NCS S 0502-Y)

Finish customization

(Available options:

Vibia colour palette)





1694

#### Finishes

- 04/ \_ \_ Black (NCS 9000N)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)
- 93/ \_ \_ White (NCS S 0502-Y)


Finish customization  
(Available options:  
Vibia colour palette)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 970 lm 121 lm/W

#### Control

1694 \_ \_ / \_ 0  
On/ Off



#### Materials

Head: Aluminum. Base: Zamak.  
Diffuser: Polycarbonate. Rod: Steel.

#### Light Source and electronics

2 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### Packaging


1 Box 0,177 x 0,445 x 0,792 m  
Vol 0,620 m<sup>3</sup>  
Gross weight 2,84 Kg Net weight 1,4 Kg



# Funnel

A fluid design defines this ceiling fixture, a streamlined, funnel-shaped base that flows into a protruding cap. The smooth, sculptural curves conceal a light source behind the tip, which reflects back on the funnel form and creates a flood of ambient illumination.

## Ceiling Wall

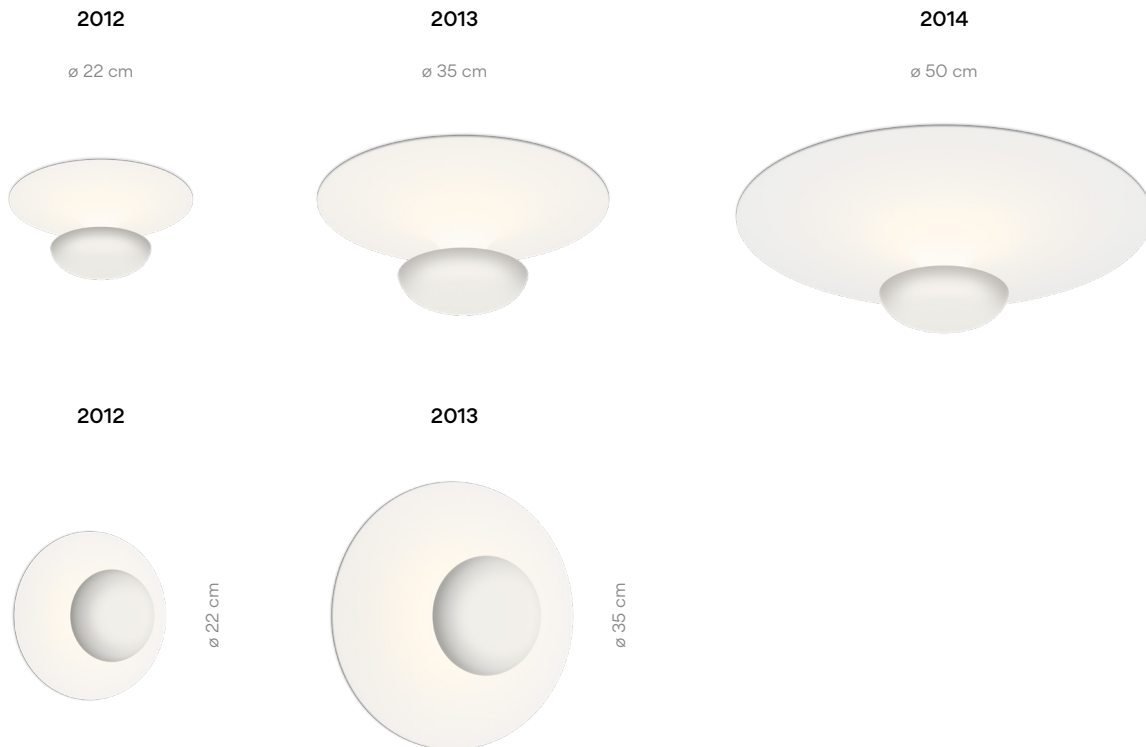

### 2012



#### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 36/ \_ \_ Soft Pink (NCS S 1010-Y50R)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

#### LED temperature colour

- /1 \_ 2700 K ☐ CRI >80 631,7 lm 100 lm/W
- /2 \_ 3000 K ☐ CRI >80 649 lm 103 lm/W
- /3 \_ 3500 K ☐ CRI >90 655,4 lm 104 lm/W

#### Control

2012 \_ \_ / \_ 0  
On/ Off

#### Finishes

- 51/ \_ \_ Gold leaf (Gold leaf)

#### LED temperature colour

- /1 \_ 2700 K ☐ CRI >80 631,7 lm 100 lm/W
- /2 \_ 3000 K ☐ CRI >80 649 lm 103 lm/W
- /3 \_ 3500 K ☐ CRI >90 655,4 lm 104 lm/W

#### Control

2012 \_ \_ / \_ 0  
On/ Off

#### Materials

Shade: Aluminum. Reflector: Aluminum.  
Support: Steel.

#### Light Source and electronics

1 x LED PLATE 6,3 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz


#### Packaging

1 Box 0,27 x 0,27 x 0,16 m  
Vol 0,0116 m<sup>3</sup>  
Gross weight 0,892 Kg Net weight 0,45 Kg

☐ LED ☐ IP20 ☐ CE ☐ EAC ☐ Bi-volt



## 2013



### Finishes


- 10/ \_ \_ White (NCS S 0300-N)
- 36/ \_ \_ Soft Pink (NCS S 1010-Y50R)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

### LED temperature colour

- /1 \_ 2700 K CRI >80 2910 lm 121 lm/W
- /2 \_ 3000 K CRI >90 2910 lm 121 lm/W
- /3 \_ 3500 K CRI >90 3019,2 lm 125,8 lm/W

### Control

2013 \_ \_ / \_ A  
DALI-2, 1-10V, Push



### Finishes

- 51/ \_ \_ Gold leaf (Gold leaf)

### LED temperature colour

- /1 \_ 2700 K CRI >80 2910 lm 121 lm/W
- /2 \_ 3000 K CRI >90 2910 lm 121 lm/W
- /3 \_ 3500 K CRI >90 3019,2 lm 125,8 lm/W

### Control

2013 \_ \_ / \_ A  
DALI-2, 1-10V, Push

### Materials

Shade: Aluminum. Reflector: Aluminum.  
Support: Steel.


### Light Source and electronics

6 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0441 m³  
Gross weight 2,53 Kg Net weight 2 Kg

## 2014



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 36/ \_ \_ Soft Pink (NCS S 1010-Y50R)
- 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

### LED temperature colour

- /1 \_ 2700 K CRI >80 2910 lm 121 lm/W
- /2 \_ 3000 K CRI >90 2910 lm 121 lm/W
- /3 \_ 3500 K CRI >90 3019,2 lm 125,8 lm/W

### Control

2014 \_ \_ / \_ A  
DALI-2, 1-10V, Push  
2014 \_ \_ / \_ Z  
Casambi

### Materials

Shade: Aluminum. Reflector: Aluminum.  
Support: Steel.

### Light Source and electronics

6 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m³  
Gross weight 3,782 Kg Net weight 3,3 Kg

# Micro

Design by Ramos & Bassols

Like an eclipse, just at that moment when the moon passes over the sun leaving only a ring of light.

Wall Outdoor

2015

ø 13,2 cm

ø 10 cm

2015

Finishes


- 03/ \_ \_ White  
(RAL 9016)
- 54/ \_ \_ Oxide  
(RAL 8017)

LED temperature colour

/1\_ 2700 K   
CRI >90 312,3 lm 50 lm/W

Control

2015 \_ \_ / \_ 0  
On/ Off



Materials

Body: Aluminum. Diffuser: Polycarbonate.

Light Source and electronics

3 x LED 1 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,212 m  
Vol 0,0050 m³  
Gross weight 1,1 Kg Net weight 0,7 Kg

Notes

Surface fitting

UNTIL STOCK RUNS OUT

LED  IP65  EAC  Bi-volt






# Rhythm Horizontal

Design by Arik Levy

Evoking the mood of Zen minimalism, Rhythm features slender light modules of varying lengths, each fitted with an LED module, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, Rhythm represents the ultimate in customised lighting.

## Pendants

2110




45 x 47 cm

2120



93 x 47 cm

2111



93 x 47 cm

2112




141 x 47 cm

2113



189 x 47 cm

2121




131 x 87 cm

2122




199 x 87 cm

Each project is unique.  
Personalise your own  
Rhythm composition  
quick and easy.

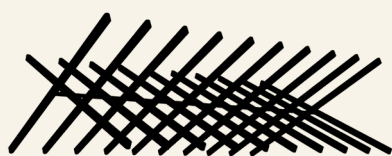

## 2110



**Finishes**  
 14/ \_ \_ Chocolate  
 (RAL 8019)  
 58/ \_ \_ Off-white  
 (NCS S 1000-N)

**LED temperature colour**  
 /1\_ 2700 K CRI >90 4332 lm 144 lm/W  
 /3\_ 3500 K CRI >90 4578,7 lm 152,6 lm/W

**Control**  
 2110 \_ \_ / \_ 1  
 DALI  
 2110 \_ \_ / \_ 3  
 1-10V  
 2110 \_ \_ / \_ Z  
 Casambi

### Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate. Canopy: Steel.

### Light Source and electronics

10 x LED STRIP 30V 2,9 W  
 Constant Voltage 30V  
 100~240V 50/60Hz

### Packaging


2 Boxes  
 Total Vol 0,0591 m³  
 Gross weight 7,7 Kg Net weight 6 Kg

### Notes

Built-in accessory (96 mm) chocolate.  
 Built-in accessory (96 mm) off-white.  
 Surface and built-in fitting

ø 18,5 cm Only for built-in.

2111



|                                                                                                             |                               |                                      |
|-------------------------------------------------------------------------------------------------------------|-------------------------------|--------------------------------------|
| <b>Finishes</b><br>● <b>14/</b> _ _ Chocolate<br>(RAL 8019)<br>● <b>58/</b> _ _ Off-white<br>(NCS S 1000-N) | <b>LED temperature colour</b> |                                      |
|                                                                                                             | <b>/1</b> _                   | 2700 K  CRI >90 8664 lm 144 lm/W     |
|                                                                                                             | <b>/3</b> _                   | 3500 K  CRI >90 9157,3 lm 152,6 lm/W |

**Control**

**2111** \_ \_ / \_ 1  
DALI

**2111** \_ \_ / \_ 3  
1-10V

**2111** \_ \_ / \_ Z  
Casambi

## Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

## Light Source and electronics

20 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

## Packaging


2 Boxes  
Total Vol 0,1570 m<sup>3</sup>  
Gross weight 14,2 Kg Net weight 10,5 Kg

## Notes

Built-in accessory (96 mm) chocolate.  
Built-in accessory (96 mm) off-white.  
Surface and built-in fitting

ø 18,5 cm Only for built-in.

2112



|                                                                                                             |                               |                                     |
|-------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------------------|
| <b>Finishes</b><br>● <b>14/</b> _ _ Chocolate<br>(RAL 8019)<br>● <b>58/</b> _ _ Off-white<br>(NCS S 1000-N) | <b>LED temperature colour</b> |                                     |
|                                                                                                             | <b>/1</b> _                   | 2700 K  CRI >90 12996 lm 144 lm/W   |
|                                                                                                             | <b>/3</b> _                   | 3500 K  CRI >90 13736 lm 152,6 lm/W |

**Control**

**2112** \_ \_ / \_ 1  
DALI

**2112** \_ \_ / \_ 3  
1-10V

**2112** \_ \_ / \_ Z  
Casambi

## Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

## Light Source and electronics

30 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

## Packaging


2 Boxes  
Total Vol 0,0430 m<sup>3</sup>  
Gross weight 10,3 Kg Net weight 7 Kg

## Notes

Built-in accessory (44,5 mm) chocolate.  
Built-in accessory (44,5 mm) off-white.  
Surface and built-in fitting

ø 18,5 cm Only for built-in.

2113



|                                                                                                             |                               |                                       |
|-------------------------------------------------------------------------------------------------------------|-------------------------------|---------------------------------------|
| <b>Finishes</b><br>● <b>14/</b> _ _ Chocolate<br>(RAL 8019)<br>● <b>58/</b> _ _ Off-white<br>(NCS S 1000-N) | <b>LED temperature colour</b> |                                       |
|                                                                                                             | <b>/1</b> _                   | 2700 K  CRI >90 17328 lm 144 lm/W     |
|                                                                                                             | <b>/3</b> _                   | 3500 K  CRI >90 18314,6 lm 152,6 lm/W |

**Control**

**2113** \_ \_ / \_ 1  
DALI

**2113** \_ \_ / \_ 3  
1-10V

**2113** \_ \_ / \_ Z  
Casambi

## Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

## Light Source and electronics

40 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,1900 m<sup>3</sup>  
Gross weight 17,2 Kg Net weight 13,5 Kg


## Notes

Built-in accessory (44,5 mm) chocolate.  
Built-in accessory (44,5 mm) off-white.  
Surface and built-in fitting

ø 18,5 cm Only for built-in.



## 2120



**Finishes**

● **14/** \_ \_ Chocolate  
(RAL 8019)

● **58/** \_ \_ Off-white  
(NCS S 1000-N)

**LED temperature colour**

**/1** \_ 2700 K CRI >90 7602,4 lm 127 lm/W

**/3** \_ 3500 K CRI >90 8035,3 lm 133,9 lm/W

**Control**

**2120** \_ \_ / \_ 1  
DALI

**2120** \_ \_ / \_ 3  
1-10V

**2120** \_ \_ / \_ Z  
Casambi

### Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

### Light Source and electronics

10 x LED STRIP 30V 5,8 W  
Constant Voltage 30V  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol 0,1380 m<sup>3</sup>  
Gross weight 9,5 Kg Net weight 7,3 Kg

### Notes

Built-in accessory (136 mm) chocolate.  
Built-in accessory (136 mm) off-white.  
Surface and built-in fitting

ø 18,5 cm Only for built-in.

## 2121



**Finishes**

● **14/** \_ \_ Chocolate  
(RAL 8019)

● **58/** \_ \_ Off-white  
(NCS S 1000-N)

**LED temperature colour**

**/1** \_ 2700 K CRI >90 15204,8 lm 127 lm/W

**/3** \_ 3500 K CRI >90 16070,6 lm 133,9 lm/W

**Control**

**2121** \_ \_ / \_ 1  
DALI

**2121** \_ \_ / \_ 3  
1-10V

**2121** \_ \_ / \_ Z  
Casambi

### Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

### Light Source and electronics

20 x LED STRIP 30V 5,8 W  
Constant Voltage 30V  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol 0,1664 m<sup>3</sup>  
Gross weight 14,7 Kg Net weight 10,5 Kg

### Notes

Built-in accessory (44,5 mm) chocolate.  
Built-in accessory (44,5 mm) off-white.  
Surface and built-in fitting

ø 18,5 cm Only for built-in.

## 2122



**Finishes**

● **14/** \_ \_ Chocolate  
(RAL 8019)

● **58/** \_ \_ Off-white  
(NCS S 1000-N)

**LED temperature colour**

**/1** \_ 2700 K CRI >90 22807,2 lm 127 lm/W

**/3** \_ 3500 K CRI >90 24105,8 lm 133,9 lm/W

**Control**

**2122** \_ \_ / \_ 3  
1-10V

### Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

### Light Source and electronics

30 x LED STRIP 30V 5,8 W  
Constant Voltage 30V  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,07120 m<sup>3</sup>  
Gross weight 24 Kg Net weight 21,5 Kg

### Notes

Built-in accessory (44,5 mm) chocolate.  
Built-in accessory (44,5 mm) off-white.  
Surface and built-in fitting

ø 18,5 cm Only for built-in.

# Rhythm Vertical


Design by Arik Levy

Evoking the mood of Zen minimalism, Rhythm features slender light modules of varying lengths, each fitted with an LED module, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, Rhythm represents the ultimate in customised lighting.


## Pendants



Each project is unique.  
Personalise your own  
Rhythm composition  
quick and easy.

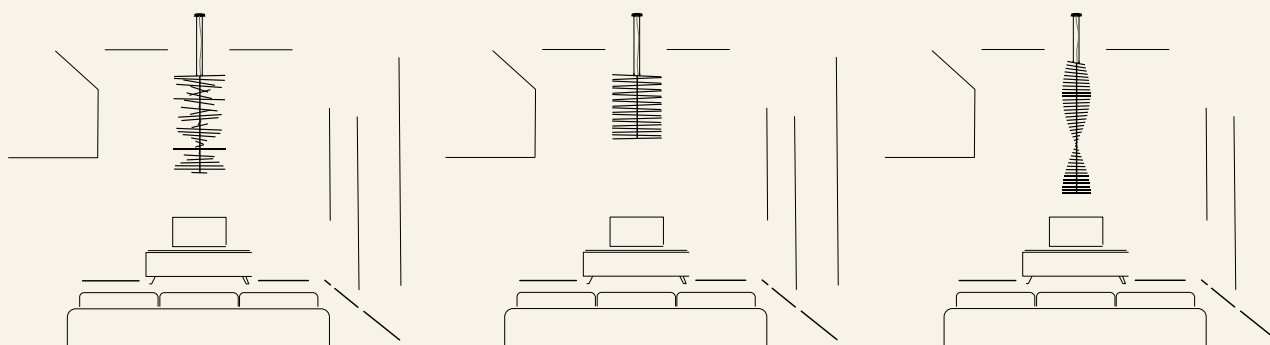

## 2141



**Finishes**

● **14/** \_ \_ Chocolate  
(RAL 8019)

● **58/** \_ \_ Off-white  
(NCS S 1000-N)

**LED temperature colour**

**/1** \_ 2700 K   
CRI >90 8664 lm 144 lm/W

**/3** \_ 3500 K   
CRI >90 9157,3 lm 152,6 lm/W

**Control**

**2141** \_ \_ / \_ 1  
DALI

**2141** \_ \_ / \_ 3  
1-10V

**2141** \_ \_ / \_ Z  
Casambi

### Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

### Light Source and electronics

20 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol 0,5850 m<sup>3</sup>  
Gross weight 10,3 Kg Net weight 7,4 Kg

### Notes

Built-in accessory (96 mm) chocolate.  
Built-in accessory (96 mm) off-white.  
Surface and built-in fitting

ø 18,5 cm Only for built-in.

## 2142



**Finishes**

● **14/** \_ \_ Chocolate  
(RAL 8019)

● **58/** \_ \_ Off-white  
(NCS S 1000-N)

**LED temperature colour**

**/1** \_ 2700 K   
CRI >90 12996 lm 144 lm/W

**/3** \_ 3500 K   
CRI >90 13736 lm 152,6 lm/W

**Control**

**2142** \_ \_ / \_ 1  
DALI

**2142** \_ \_ / \_ 3  
1-10V

**2142** \_ \_ / \_ Z  
Casambi

### Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

### Light Source and electronics

30 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol 0,6239 m<sup>3</sup>  
Gross weight 13,7 Kg Net weight 8,2 Kg

### Notes

Built-in accessory (96 mm) chocolate.  
Built-in accessory (96 mm) off-white.  
Surface and built-in fitting

ø 18,5 cm Only for built-in.

## 2143



**Finishes**

● **14/** \_ \_ Chocolate  
(RAL 8019)

● **58/** \_ \_ Off-white  
(NCS S 1000-N)

**LED temperature colour**

**/1** \_ 2700 K   
CRI >90 8664 lm 144 lm/W

**/3** \_ 3500 K   
CRI >90 9157,3 lm 152,6 lm/W

**Control**

**2143** \_ \_ / \_ 1  
DALI

**2143** \_ \_ / \_ 3  
1-10V

**2143** \_ \_ / \_ Z  
Casambi

### Materials

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

### Light Source and electronics

40 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,6600 m<sup>3</sup>  
Gross weight 16,9 Kg Net weight 13 Kg

### Notes

Built-in accessory (96 mm) chocolate.  
Built-in accessory (96 mm) off-white.  
Surface and built-in fitting


ø 18,5 cm Only for built-in.

# Guise

Design by Stefan Diez

Crafted of precision glass and embedded with a row of recessed LEDs, Guise explores the relationship between light and transparency. The light inside the glass appears invisible while the delicately engraved surface radiates an intense glow, the markings beautifully diffusing the light.

## Wall

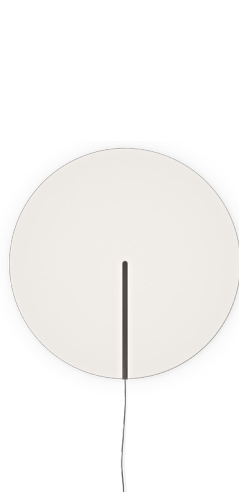

**2260**

ø 54 cm



**2262**


ø 92 cm

### 2260

**Finishes**  
● **18/ \_ \_ Graphite**  
(ADAPTA RF9913WX)

**LED temperature colour**  
**/2 \_ 3000 K**   
CRI >90 445,29 lm 45 lm/W

**Control**  
**2260 \_ \_ / \_ 6**  
Sensor



**Materials**  
Diffuser: Borosilicate glass. LED support: Aluminum.

**Light Source and electronics**  
1 x LED STRIP 24V 10 W  
Constant Voltage 24V  
100~240V 50/60Hz

**Packaging**  
1 Box 0,69 x 0,69 x 0,09 m  
Vol 0,043 m³  
Gross weight 7 Kg Net weight 4 Kg


**Notes**  
Electric cable with plug 3 m

### 2262

**Finishes**  
● **18/ \_ \_ Graphite**  
(ADAPTA RF9913WX)

**LED temperature colour**  
**/2 \_ 3000 K**   
CRI >90 897,71 lm 52 lm/W

**Control**  
**2262 \_ \_ / \_ 6**  
Sensor



**Materials**  
Diffuser: Borosilicate glass. LED support: Aluminum.

**Light Source and electronics**  
1 x LED STRIP 24V 17,2 W.  
Constant Voltage 24V  
100~240V 50/60Hz

**Packaging**  
1 Box 1,04 x 1,04 x 0,10 m  
Vol 0,104 m³  
Gross weight 16,5 Kg Net weight 11,58 Kg

**Notes**  
Electric cable with plug 3 m



Pendants

2270



ø 16 cm

2271




ø 16 cm

2272




ø 16 cm

2275

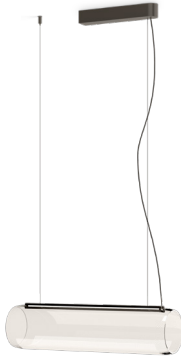

63 cm

2277

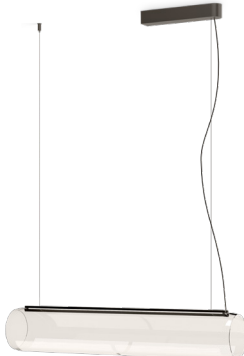

89 cm

2282



ø 25 cm

2284




ø 25 cm

2288



ø 40 cm

## 2270



**Finishes**  
● 18/ \_ \_ Graphite  
(ADAPTA RF9913WX)

**LED temperature colour**  
/2 \_ 3000 K   
CRI >90 1097,74 lm 55 lm/W

### Control

2270 \_ \_ / \_ 1  
DALI-2

2270 \_ \_ / \_ 6  
Sensor

2270 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Borosilicate glass. Body: Aluminum.

### Light Source and electronics

1 x LED STRIP 24V 20 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging


1 Box 0,87 x 0,35 x 0,37 m  
Vol 0,113 m³  
Gross weight 6,5 Kg Net weight 5 Kg

### Notes

Extra cable length. 16,00 €/m

LED  IP20  EAC   
Bi-volt  Dimmer

## 2271



**Finishes**  
● 18/ \_ \_ Graphite  
(ADAPTA RF9913WX)

**LED temperature colour**  
/2 \_ 3000 K   
CRI >90 3484,8 lm 87,12 lm/W

### Control

2271 \_ \_ / \_ 1  
DALI-2

2271 \_ \_ / \_ 3  
1-10V

### Materials

Diffuser: Borosilicate glass. Body: Aluminum.

### Light Source and electronics

2 x LED STRIP 24V 20 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,231 m³  
Gross weight 13 Kg Net weight 10 Kg


### Notes

Electric cable with plug 2 m.  
Extra cable length. 16,00 €/m

UNTIL STOCK RUNS OUT

LED  IP20  EAC   
Bi-volt  Dimmer

## 2272



**Finishes**  
● 18/ \_ \_ Graphite  
(ADAPTA RF9913WX)

**LED temperature colour**  
/2 \_ 3000 K   
CRI >90 1097,74 lm 55 lm/W

### Control

2272 \_ \_ / \_ 6  
Sensor

### Materials

Diffuser: Borosilicate glass. LED support: Aluminum.

### Light Source and electronics

1 x LED STRIP 24V 20 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging


1 Box 0,45 x 0,80 x 0,20 m  
Vol 0,0072 m³  
Gross weight 16,10 Kg Net weight 16,10 Kg

### Notes

Extra cable length. 16,00 €/m

LED  IP20  EAC  Bi-volt

## 2275



**Finishes**  
● 18/ \_ \_ Graphite  
(ADAPTA RF9913WX)

**LED temperature colour**  
/2 \_ 3000 K   
CRI >90 1404,68 lm 47 lm/W

### Control

2275 \_ \_ / \_ 1  
DALI-2

2275 \_ \_ / \_ 6  
Sensor

### Materials

Diffuser: Borosilicate glass. Body: Aluminum.

### Light Source and electronics

1 x LED STRIP 24V 20 W  
Constant Voltage 24V  
110~240V 50/60Hz



### Packaging

1 Box 0,87 x 0,35 x 0,37 m  
Vol 0,113 m³  
Gross weight 6,5 Kg Net weight 5 Kg

### Notes


Extra cable length. 16,00 €/m

LED  IP20  EAC   
Bi-volt  Dimmer

|      |                                                                                    |                                                                                           |                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2277 |   | <b>Finishes</b><br>● 18/ _ _ Graphite<br>(ADAPTA RF9913WX)                                | <b>LED temperature colour</b><br>/2 _ 3000 K <br>CRI >90 1404,68 lm 47 lm/W | <b>Control</b><br>2277 _ _ / _ 1<br>DALI-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|      |                                                                                    |                                                                                           |                                                                                                                                                              | 2277 _ _ / _ 6<br>Sensor<br>2277 _ _ / _ Z<br>Casambi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 2282 |  | <b>Finishes</b><br>● 18/ _ _ Graphite<br>(ADAPTA RF9913WX)                                | <b>LED temperature colour</b><br>/2 _ 3000 K <br>CRI >90 398,74 lm 33 lm/W  | <b>Control</b><br>2282 _ _ / _ 1<br>DALI-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|      |                                                                                    |                                                                                           |                                                                                                                                                              | 2282 _ _ / _ 6<br>Sensor<br>2282 _ _ / _ B<br>1-10V, Push<br>2282 _ _ / _ Z<br>Casambi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|      |                                                                                    | <b>Materials</b><br>Diffuser: Borosilicate glass. Body: Aluminum.<br>Ceiling rose: Steel. | <b>Light Source and electronics</b><br>1 x LED STRIP 24V 30 W<br>Constant Voltage 24V<br>100~240V 50/60Hz                                                    | <b>Packaging</b><br>1 Box 1,18 x 0,35 x 0,37 m<br>Vol 0,153 m³<br>Gross weight 9,5 Kg Net weight 7,5 Kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|      |                                                                                    |                                                                                           |                                                                                                                                                              | <b>Notes</b><br>Extra cable length. 16,00 €/m<br>    <br>  |
|      |                                                                                    | <b>Materials</b><br>Diffuser: Borosilicate glass. Body: Aluminum.<br>Ceiling rose: Steel. | <b>Light Source and electronics</b><br>1 x LED STRIP 24V 12 W<br>Constant Voltage 24V<br>110~240V 50/60Hz                                                    | <b>Packaging</b><br>1 Box 0,41 x 0,41 x 0,38 m<br>Vol 0,0639 m³<br>Gross weight 3,3 Kg Net weight 2,3 Kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|      |                                                                                    |                                                                                           |                                                                                                                                                              | <b>Notes</b><br>Extra cable length. 16,00 €/m<br>                                                                              |



## 2284



|                                       |                                                                                                                            |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Finishes</b>                       | <b>LED temperature colour</b>                                                                                              |
| 18/ _ _ Graphite<br>(ADAPTA RF9913WX) | /2 _ 3000 K <br>CRI >90 398,74 lm 33 lm/W |

### Control

2284 \_ \_ / \_ 1  
DALI-2

2284 \_ \_ / \_ 6  
Sensor

2284 \_ \_ / \_ B  
1-10V, Push

2284 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Borosilicate glass. Body: Aluminum.  
Ceiling rose: Steel.

### Light Source and electronics

1 x LED STRIP 24V 12 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging


1 Box 0,41 x 0,41 x 0,56 m  
Vol 0,0941 m<sup>3</sup>  
Gross weight 6,2 Kg Net weight 5,2 Kg

### Notes

Extra cable length. 16,00 €/m  
UNTIL STOCK RUNS OUT

LED  IP20  CE  EAC  Bi-volt 

## 2288



|                                       |                                                                                                                             |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Finishes</b>                       | <b>LED temperature colour</b>                                                                                               |
| 18/ _ _ Graphite<br>(ADAPTA RF9913WX) | /2 _ 3000 K <br>CRI >90 868,87 lm 48 lm/W |

### Control

2288 \_ \_ / \_ 1  
DALI-2

2288 \_ \_ / \_ 6  
Sensor

2288 \_ \_ / \_ B  
1-10V, Push

2288 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Borosilicate glass. Body: Aluminum.  
Ceiling rose: Steel.

### Light Source and electronics

1 x LED STRIP 24V 18 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging

1 Box 0,56 x 0,56 x 0,46 m  
Vol 0,1443 m<sup>3</sup>  
Gross weight 11,7 Kg Net weight 9,7 Kg

### Notes

Extra cable length. 16,00 €/m

LED  IP20  CE  EAC 

Ceiling

2292

ø 25 cm



2294

ø 25 cm



2298

ø 40 cm



2292

Finishes

● 18/ \_\_ Graphite  
(ADAPTA RF9913WX)

LED temperature colour


/2 \_ 3000 K    
CRI >90 398,74 lm 33 lm/W

Control

2292 \_\_ / \_ 1  
DALI-2

2292 \_\_ / \_ B  
1-10V, Push

2292 \_\_ / \_ Z  
Casambi



Materials

Diffuser: Borosilicate glass. Body: Aluminum.


Light Source and electronics

1 x LED STRIP 24V 12 W  
Constant Voltage 24V  
110~240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,33 m  
Vol 0,0555 m<sup>3</sup>  
Gross weight 3,2 Kg Net weight 2,2 Kg



2294

Finishes

● 18/ \_\_ Graphite  
(ADAPTA RF9913WX)

LED temperature colour


/2 \_ 3000 K    
CRI >90 398,74 lm 33 lm/W

Control

2294 \_\_ / \_ 1  
DALI-2

2294 \_\_ / \_ B  
1-10V, Push

2294 \_\_ / \_ Z  
Casambi



Materials

Diffuser: Borosilicate glass. Body: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 12 W  
Constant Voltage 24V  
110~240V 50/60Hz


Packaging


1 Box 0,41 x 0,41 x 0,51 m  
Vol 0,0857 m<sup>3</sup>  
Gross weight 6,1 Kg Net weight 5,1 Kg

Notes


UNTIL STOCK RUNS OUT




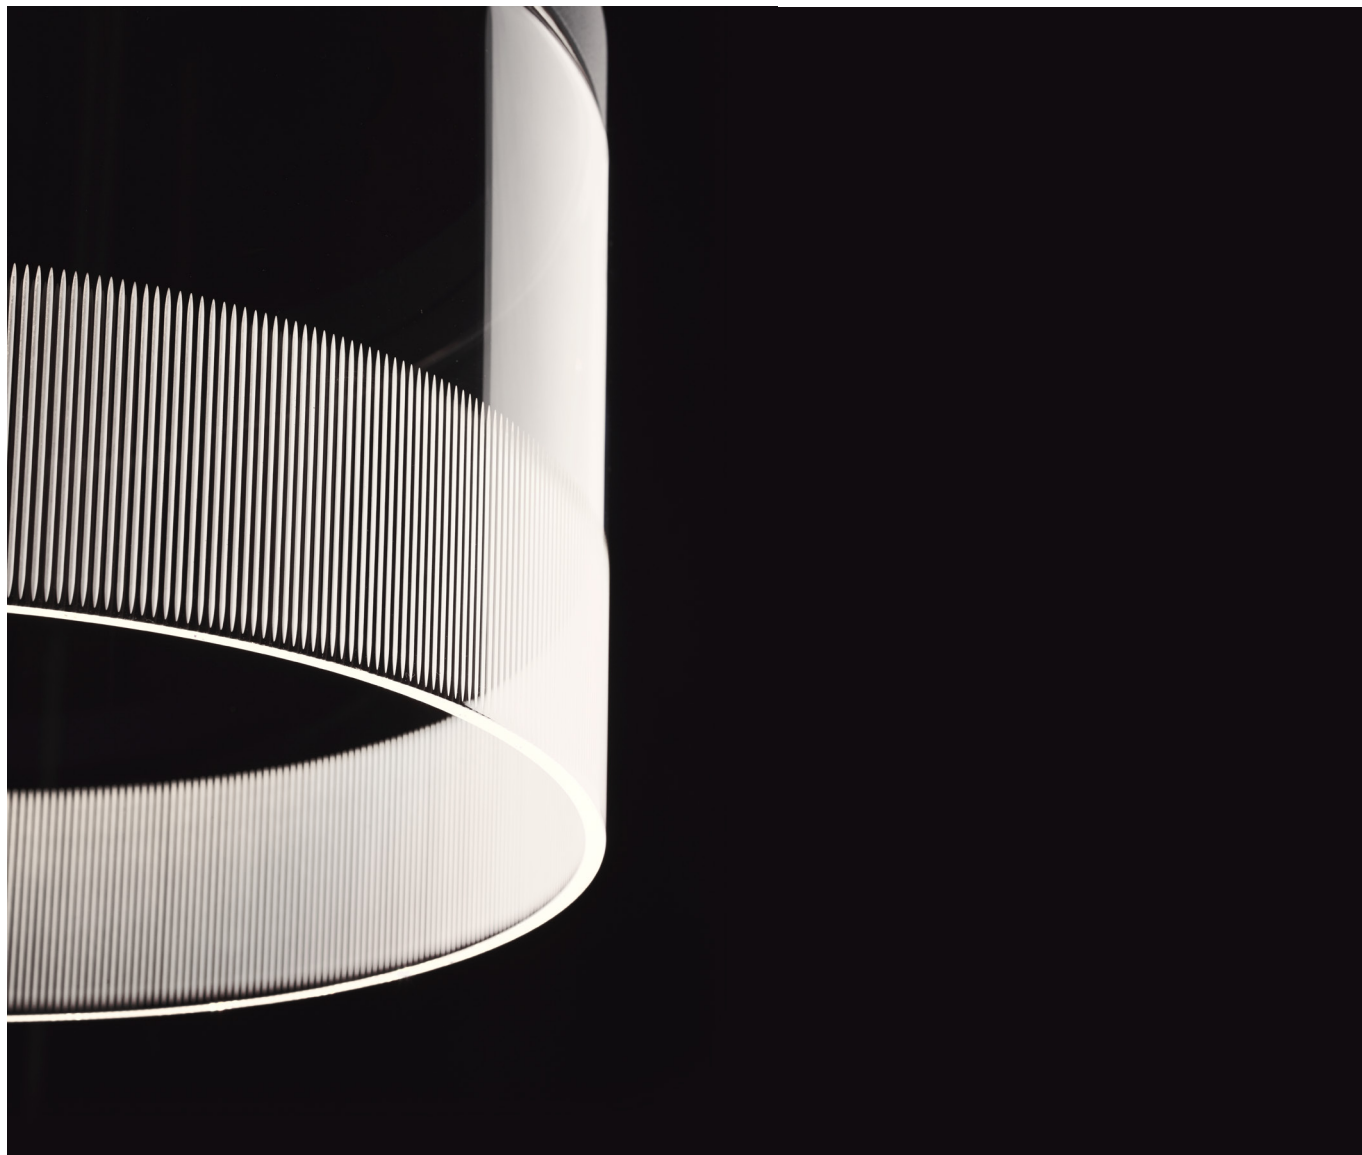
## 2298



**Finishes**  
 18/ \_ Graphite  
 (ADAPTA RF9913WX)

**LED temperature colour**  
 /2\_ 3000 K   
 CRI >90 398,74 lm 22 lm/W

**Control**  
 2298 \_ / \_ 1  
 DALI-2


2298 \_ / \_ B  
 1-10V, Push

2298 \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Borosilicate glass. Body: Aluminum.

**Light Source and electronics**  
 1 x LED STRIP 24V 18 W  
 Constant Voltage 24V  
 220~240V 50/60Hz

**Packaging**  
 1 Box 0,56 x 0,56 x 0,46 m  
 Vol 0,1443 m<sup>3</sup>  
 Gross weight 13,3 Kg Net weight 11,3 Kg



# Halo Circular

Design by Martín Azúa

A seamless merging of light and matter, Halo lends the effect of light floating in air. Powered by LED bulbs that remain invisible within their opalized, spherical moulds, the light flows freely from its source.

---

## Pendants




ø 55,5 cm

**2330**




89 cm

**2331**



127 cm



**2332**




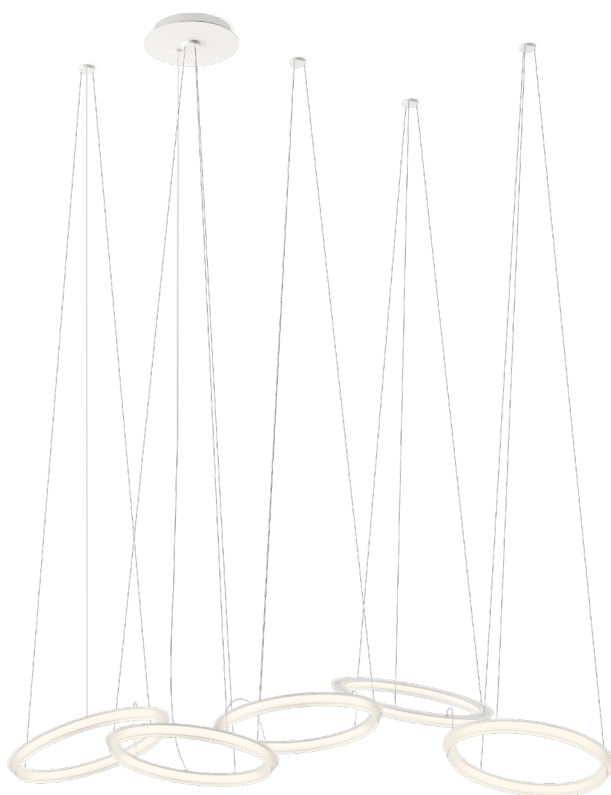


197 cm

**2333**

Each project is unique.  
Personalise your own  
Halo composition  
quick and easy.

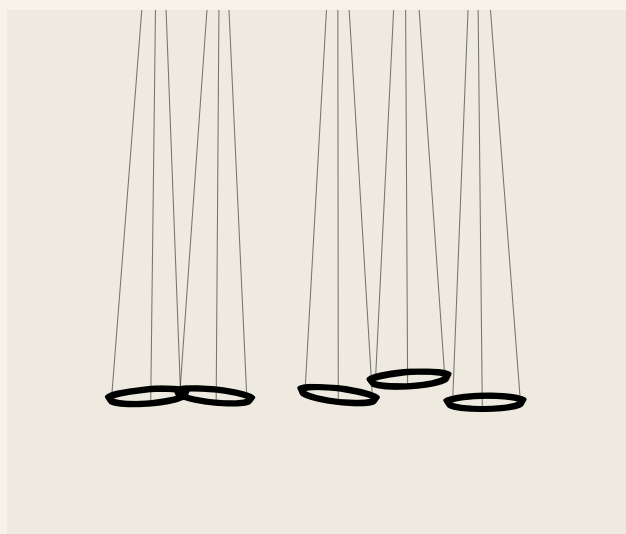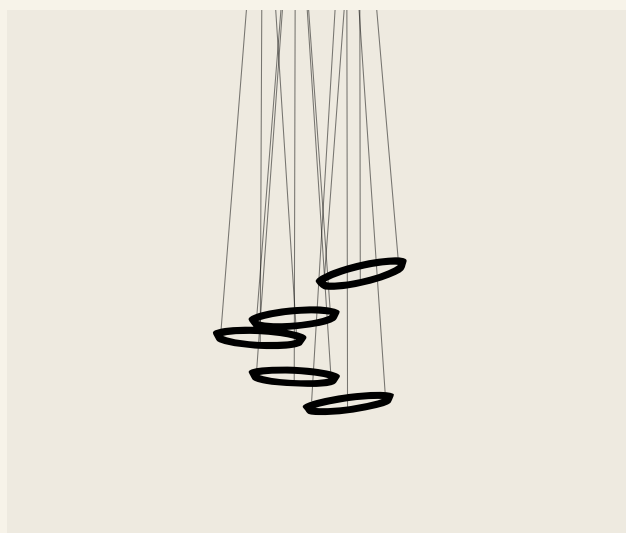

|      |                                                                                    |                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                           |
|------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| 2330 |   | Finishes<br>● 03/ _ _ White<br>(RAL 9016)                                                                                                        | LED temperature colour<br>/2 _ 3000 K  CRI >80 1726,78 lm 75 lm/W                                                                                                                                                                                                                                                                                                                                                                                                            | Control<br>2330 _ _ / _ 1<br>DALI<br>2330 _ _ / _ 3<br>1-10V<br>2330 _ _ / _ Z<br>Casambi |
|      |                                                                                    | Materials<br>Diffuser: PMMA. Canopy: Steel<br>Light Source and electronics<br>1 x LED STRIP 24V 23 W<br>Constant Voltage 24V<br>100~277V 50/60Hz | Packaging<br>1 Box 0,60 x 0,60 x 0,27 m<br>Vol 0,0972 m³<br>Gross weight 5,75 Kg Net weight 3,75 Kg<br>     Multi-volt            |                                                                                           |
| 2331 |  | Finishes<br>● 03/ _ _ White<br>(RAL 9016)                                                                                                        | LED temperature colour<br>/2 _ 3000 K  CRI >80 3453,56 lm 75 lm/W                                                                                                                                                                                                                                                                                                                                                                                                            | Control<br>2331 _ _ / _ 1<br>DALI<br>2331 _ _ / _ 3<br>1-10V<br>2331 _ _ / _ Z<br>Casambi |
|      |                                                                                    | Materials<br>Diffuser: PMMA. Canopy: Steel<br>Light Source and electronics<br>2 x LED STRIP 24V 23 W<br>Constant Voltage 24V<br>100~277V 50/60Hz | Packaging<br>1 Box 0,60 x 0,60 x 0,27 m<br>Vol 0,0972 m³<br>Gross weight 10,25 Kg Net weight 6,25 Kg<br>     Multi-volt |                                                                                           |
| 2332 |  | Finishes<br>● 03/ _ _ White<br>(RAL 9016)                                                                                                        | LED temperature colour<br>/2 _ 3000 K  CRI >80 5180,34 lm 75 lm/W                                                                                                                                                                                                                                                                                                                                                                                                          | Control<br>2332 _ _ / _ 1<br>DALI<br>2332 _ _ / _ 3<br>1-10V<br>2332 _ _ / _ Z<br>Casambi |
|      |                                                                                    | Materials<br>Diffuser: PMMA. Canopy: Steel<br>Light Source and electronics<br>3 x LED STRIP 24V 23 W<br>Constant Voltage 24V<br>100~277V 50/60Hz | Packaging<br>1 Box 0,60 x 0,60 x 0,27 m<br>Vol 0,0972 m³<br>Gross weight 14,75 Kg Net weight 8,75 Kg<br>     Multi-volt |                                                                                           |
| 2333 |  | Finishes<br>● 03/ _ _ White<br>(RAL 9016)                                                                                                        | LED temperature colour<br>/2 _ 3000 K  CRI >80 8633,9 lm 75 lm/W                                                                                                                                                                                                                                                                                                                                                                                                           | Control<br>2333 _ _ / _ 1<br>DALI<br>2333 _ _ / _ 3<br>1-10V<br>2333 _ _ / _ Z<br>Casambi |
|      |                                                                                    | Materials<br>Diffuser: PMMA. Canopy: Steel<br>Light Source and electronics<br>5 x LED STRIP 24V 23 W<br>Constant Voltage 24V<br>100~277V 50/60Hz | Packaging<br>2 Boxes<br>Total Vol 0,1106 m³<br>Gross weight 23,75 Kg Net weight 13,75 Kg<br>     Multi-volt             |                                                                                           |






# Halo Lineal

Design by Martín Azúa


A seamless merging of light and matter, Halo lends the effect of light floating in air. Powered by LED bulbs that remain invisible within their opalized, linear moulds, the light flows freely from its source.

## Pendants




152 cm

**2340**

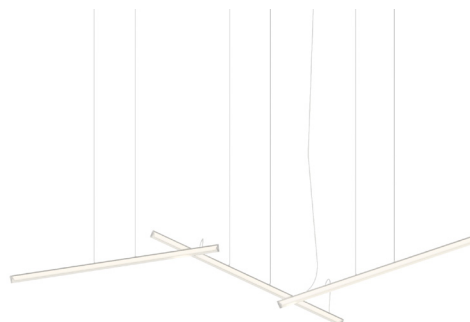


204 cm

**2341**

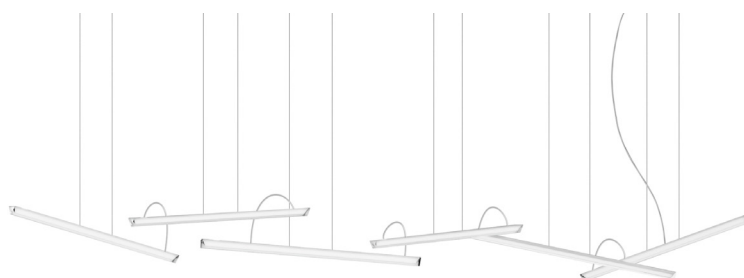

336 cm

**2342**



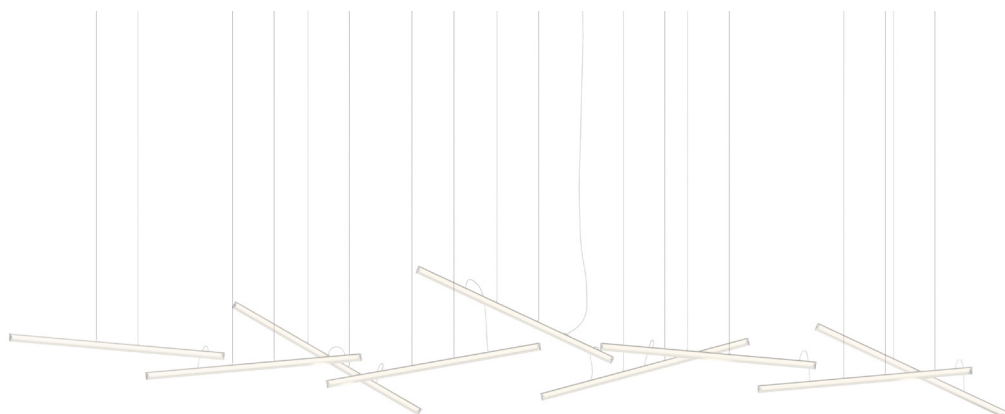


500 cm


**2343**



Each project is unique.  
Personalise your own  
Halo composition  
quick and easy.

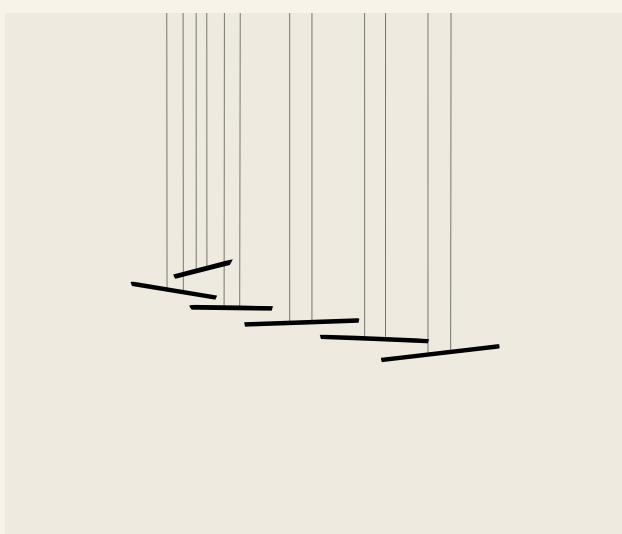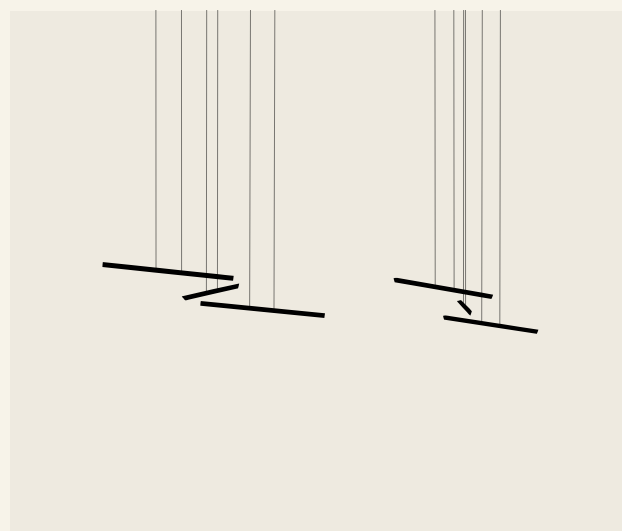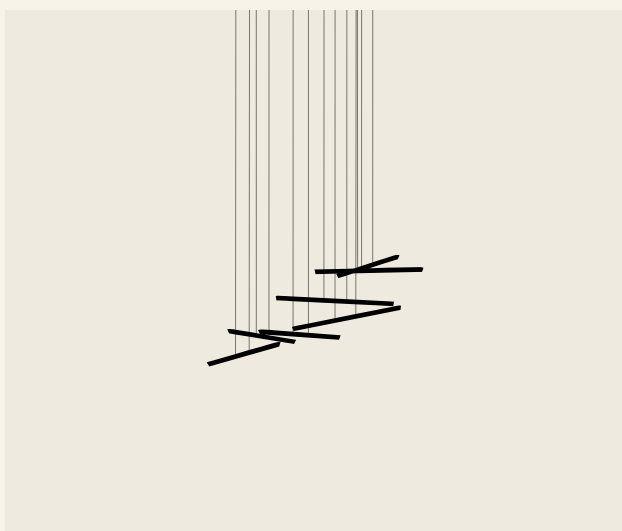

## 2340



### Finishes

● **03/** \_\_ White  
(RAL 9016)

### LED temperature colour

**/2** \_ 3000 K   
CRI >80 2567,18 lm 84 lm/W

### Control

**2340** \_\_ / \_ 1  
DALI

**2340** \_\_ / \_ 3  
1-10V

**2340** \_\_ / \_ Z  
Casambi

### Materials

Diffuser: PMMA. Canopy: Steel

### Light Source and electronics


2 x LED STRIP 24V 15,3 W  
Constant Voltage 24V  
100~277V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,0753 m<sup>3</sup>  
Gross weight 6,2 Kg Net weight 5,58 Kg

     Multi-volt

## 2341



### Finishes

● **03/** \_\_ White  
(RAL 9016)

### LED temperature colour

**/2** \_ 3000 K   
CRI >80 3850,77 lm 84 lm/W

### Control

**2341** \_\_ / \_ 1  
DALI

**2341** \_\_ / \_ 3  
1-10V

**2341** \_\_ / \_ Z  
Casambi

### Materials

Diffuser: PMMA. Canopy: Steel

### Light Source and electronics


3 x LED STRIP 24V 15,3 W  
Constant Voltage 24V  
100~277V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,0753 m<sup>3</sup>  
Gross weight 7,3 Kg Net weight 6,57 Kg

     Multi-volt

## 2342



### Finishes

● **03/** \_\_ White  
(RAL 9016)

### LED temperature colour

**/2** \_ 3000 K   
CRI >80 7701,54 lm 84 lm/W

### Control

**2342** \_\_ / \_ 1  
DALI

**2342** \_\_ / \_ 3  
1-10V

**2342** \_\_ / \_ Z  
Casambi

### Materials

Diffuser: PMMA. Canopy: Steel

### Light Source and electronics


6 x LED STRIP 24V 15,3 W  
Constant Voltage 24V  
100~277V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,0756 m<sup>3</sup>  
Gross weight 11,8 Kg Net weight 10,25 Kg

     Multi-volt

## 2343



### Finishes

● **03/** \_\_ White  
(RAL 9016)

### LED temperature colour

**/2** \_ 3000 K   
CRI >80 11552,31 lm 84 lm/W

### Control

**2343** \_\_ / \_ 1  
DALI

**2343** \_\_ / \_ 3  
1-10V

**2343** \_\_ / \_ Z  
Casambi

### Materials

Diffuser: PMMA. Canopy: Steel

### Light Source and electronics

9 x LED STRIP 24V 15,3 W  
Constant Voltage 24V  
100~277V 50/60Hz

### Packaging

2 Boxes  
Total Vol 0,0756 m<sup>3</sup>  
Gross weight 16,20 Kg Net weight 14,75 Kg

     Multi-volt




# Halo Jewel

Design by Martín Azúa

Subtle light floating in the air and delicately suspended by a perfectly crafted steel structure. Light and matter in one.


## Pendants

2350

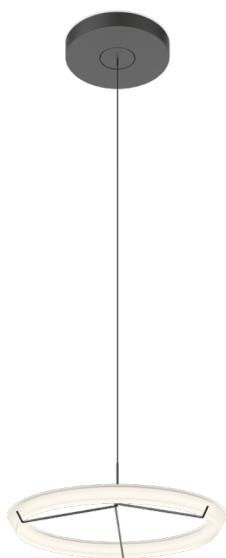


ø 56,3 cm

2351

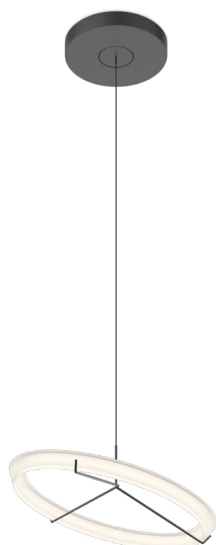


ø 56,3 cm

2355




max. 350 cm


2356



max. 350 cm

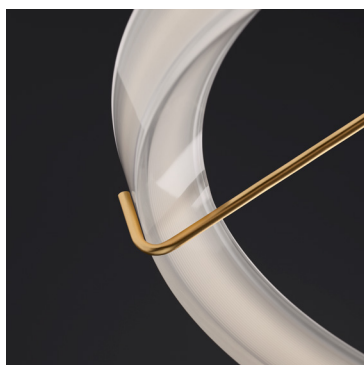

## 2350

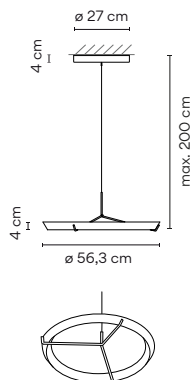

| Finishes                       | LED temperature colour                                                                                                |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| ● 11/ _ _ Black (NCS S 8500-N) | /2 _ 3000 K  CRI >80 2024 lm 88 lm/W |

### Control

2350 \_ \_ / \_ 1

DALI

2350 \_ \_ / \_ 3

1-10V

2350 \_ \_ / \_ Z

Casambi

| Finishes              | LED temperature colour                                                                                                |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------|
| ● 20/ _ _ Gold (Gold) | /2 _ 3000 K  CRI >80 2024 lm 88 lm/W |

### Control

2350 \_ \_ / \_ 1

DALI

2350 \_ \_ / \_ 3

1-10V

2350 \_ \_ / \_ Z

Casambi

### Materials

Diffuser: Methacrylate. LED support: Aluminum.  
Pendant structure: Steel. Ceiling rose: Steel.

### Light Source and electronics

1 x LED STRIP 24V 23 W  
Constant Voltage 24V  
100~277V 50/60Hz

### Packaging

1 Box 0,6 x 0,6 x 0,27 m  
Vol 0,097 m³  
Gross weight 7 Kg Net weight 6,35 Kg

### Notes


Extra cable length. 16,00 €/m

     Multi-volt

### Electrical connection

Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings

## 2351

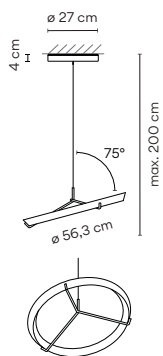

| Finishes                       | LED temperature colour                                                                                                  |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| ● 11/ _ _ Black (NCS S 8500-N) | /2 _ 3000 K  CRI >80 2024 lm 88 lm/W |

### Control

2351 \_ \_ / \_ 1

DALI

2351 \_ \_ / \_ 3

1-10V

2351 \_ \_ / \_ Z

Casambi

| Finishes              | LED temperature colour                                                                                                  |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------|
| ● 20/ _ _ Gold (Gold) | /2 _ 3000 K  CRI >80 2024 lm 88 lm/W |

### Control

2351 \_ \_ / \_ 1

DALI

2351 \_ \_ / \_ 3

1-10V

2351 \_ \_ / \_ Z

Casambi

### Materials

Diffuser: Methacrylate. LED support: Aluminum.  
Pendant structure: Steel. Ceiling rose: Steel.

### Light Source and electronics

1 x LED STRIP 24V 23 W  
Constant Voltage 24V  
100~277V 50/60Hz

### Packaging

1 Box 0,6 x 0,6 x 0,27 m  
Vol 0,097 m³  
Gross weight 7 Kg Net weight 6,35 Kg

### Notes

Extra cable length. 16,00 €/m


     Multi-volt

### Electrical connection

Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings

|                                            |        |                        |         |
|--------------------------------------------|--------|------------------------|---------|
| 1160                                       | 10     | /1A                    | 18      |
| Model                                      | Finish | LED temperature colour | Control |
| Electrical connection<br>Only for pendants |        |                        |         |

2355



|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                       |                           |
|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Finishes                                                                                         | LED temperature colour                                                                                                                                                                                                                                                                                                                                                                                                                | Control                   |
| ● 11/ _ _ Black<br>(NCS S 8500-N)                                                                | /2 _ 3000 K <br>CRI >80 1224 lm 80 lm/W                                                                                                                                                                                                                                                                                                              | 2355 _ _ / _ 1<br>DALI    |
|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2355 _ _ / _ 3<br>1-10V   |
|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2355 _ _ / _ Z<br>Casambi |
| Finishes                                                                                         | LED temperature colour                                                                                                                                                                                                                                                                                                                                                                                                                | Control                   |
| ● 20/ _ _ Gold<br>(Gold)                                                                         | /2 _ 3000 K <br>CRI >80 1224 lm 80 lm/W                                                                                                                                                                                                                                                                                                              | 2355 _ _ / _ 1<br>DALI    |
|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2355 _ _ / _ 3<br>1-10V   |
|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2355 _ _ / _ Z<br>Casambi |
| Materials                                                                                        | Packaging                                                                                                                                                                                                                                                                                                                                                                                                                             |                           |
| Diffuser: Methacrylate. LED support: Aluminum.<br>Pendant structure: Steel. Ceiling rose: Steel. | 1 Box 0,13 x 0,19 x 1,265 m<br>Vol 0,0312 m³<br>Gross weight 5 Kg Net weight 4,1 Kg                                                                                                                                                                                                                                                                                                                                                   |                           |
| Light Source and electronics                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                       |                           |
| 1 x LED STRIP 24V 15,3 W<br>Constant Voltage 24V<br>220~240V 50/60Hz                             |      |                           |
|                                                                                                  |                                                                                                                                                                                                                                                                |                           |

Electrical connection

Surface

\_18 Free Wire

\_23 Built-in

\_31 Remote

Micro


for plaster ceilings

\_32 Remote

XXS

for all types of drop ceilings

2356



|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                           |
|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Finishes                                                                                         | LED temperature colour                                                                                                                                                                                                                                                                                                                                                                                                                     | Control                   |
| ● 11/ _ _ Black<br>(NCS S 8500-N)                                                                | /2 _ 3000 K <br>CRI >80 3672 lm 80 lm/W                                                                                                                                                                                                                                                                                                                 | 2356 _ _ / _ 1<br>DALI    |
|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2356 _ _ / _ 3<br>1-10V   |
|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2356 _ _ / _ Z<br>Casambi |
| Finishes                                                                                         | LED temperature colour                                                                                                                                                                                                                                                                                                                                                                                                                     | Control                   |
| ● 20/ _ _ Gold<br>(Gold)                                                                         | /2 _ 3000 K <br>CRI >80 3672 lm 80 lm/W                                                                                                                                                                                                                                                                                                                 | 2356 _ _ / _ 1<br>DALI    |
|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2356 _ _ / _ 3<br>1-10V   |
|                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2356 _ _ / _ Z<br>Casambi |
| Materials                                                                                        | Packaging                                                                                                                                                                                                                                                                                                                                                                                                                                  |                           |
| Diffuser: Methacrylate. LED support: Aluminum.<br>Pendant structure: Steel. Ceiling rose: Steel. | 1 Box 0,31 x 0,33 x 2 m<br>Vol 0,2046 m³<br>Gross weight 7,4 Kg Net weight 6,06 Kg                                                                                                                                                                                                                                                                                                                                                         |                           |
| Light Source and electronics                                                                     | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                      |                           |
| 3 x LED STRIP 24V 15,3 W<br>Constant Voltage 24V<br>100~277V 50/60Hz                             | Extra cable length. 16,00 €/m                                                                                                                                                                                                                                                                                                                                                                                                              |                           |
|                                                                                                  |      |                           |
|                                                                                                  |                                                                                                                                                                                                                                                                     |                           |






# Composing pendants

Next sketches are composed by one or more compositions


---

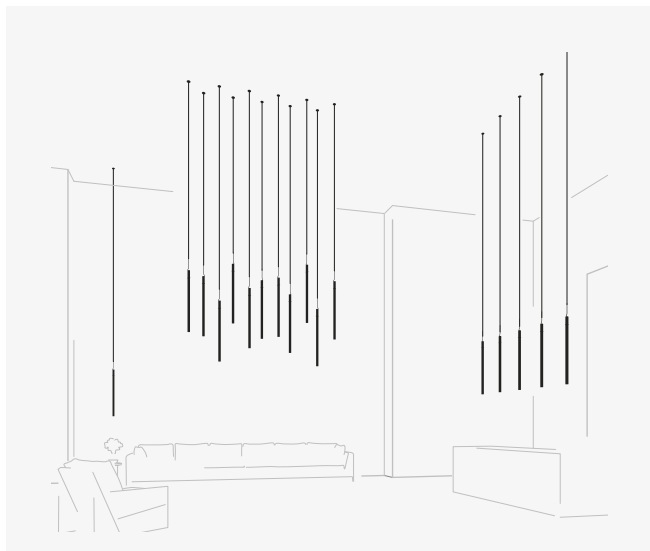

17 x 2355.



1 x 2350 and 2 x 2351.

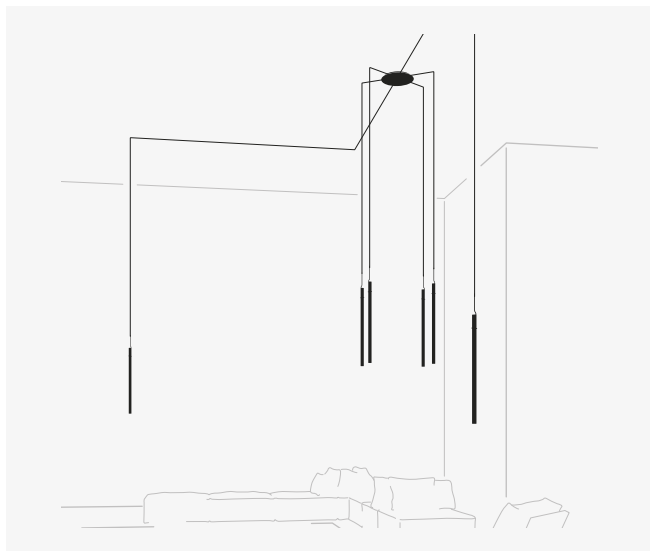

6 x 2355.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Halo composition quick  
and easy at [vibia.com](http://vibia.com)





# Electrical connection options for models 2350 / 2351 / 2355


Choose your preferred installation option  
according to your needs.  
For each composition, the optimal minimum  
number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate  
the silkiness and lightness of compositions on  
suspended ceilings, its great visual grandeur taking  
center stage.

For Ref. 2350 / 2351 / 2355


### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.




---

## Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.


For Ref. 2350 / 2351

### Surface




ø 27 cm  
match with  
fixture finish.


### Free Wire



ø 22 cm



ø 36 cm




ø 40 cm

---


For Ref. 2355

### Surface




ø 16 cm  
match with  
fixture finish.


### Free Wire



ø 20 cm





ø 36 cm



ø 40 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.




# Halo Wall

Design by Martín Azúa

A seamless merging of light and matter, Halo Wall lends the effect of light floating in the air and bathing the walls. A feature piece which creates subtle, magical light.

## Wall

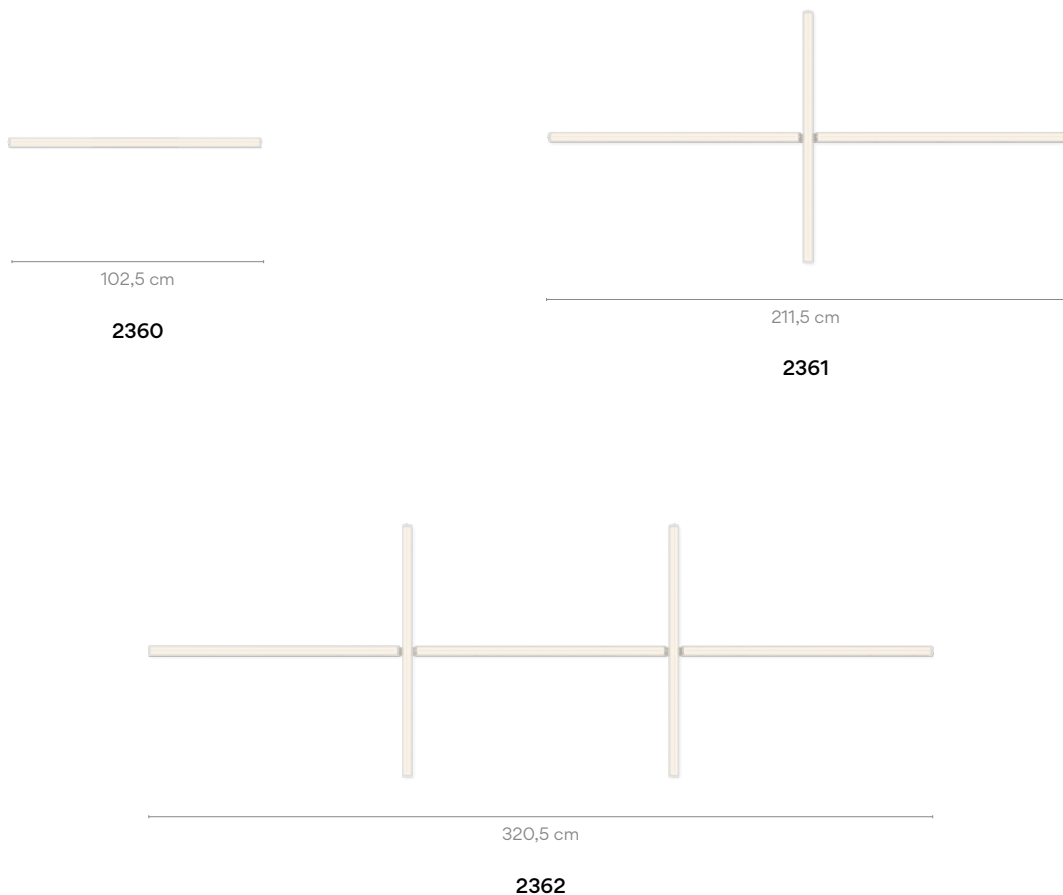

### 2360

- Finishes
- 11/ \_ \_ Black (NCS S 8500-N)
  - 23/ \_ \_ Warm White (NCS S 1000-N)
- LED temperature colour
- /2 \_ 3000 K
  - CRI >80 1224 lm 80 lm/W

Control

2360 \_ \_ / \_ 1  
DALI

2360 \_ \_ / \_ 3  
1-10V

2360 \_ \_ / \_ Z  
Casambi

Materials



Diffuser: Methacrylate. LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 15,3 W  
Constant Voltage 24V  
220~240V 50/60Hz

Packaging

1 Box 0,10 x 1,025 x 0,10 m  
Vol 0,01 m³  
Gross weight 2,25 Kg Net weight 1,75 Kg



## 2361

**Finishes**

- 11/ \_ \_ Black (NCS S 8500-N)
- 23/ \_ \_ Warm White (NCS S 1000-N)

**LED temperature colour**


/2 3000 K  CRI >80 3672 lm 80 lm/W

### Control

2361 \_ \_ / \_ 1  
DALI

2361 \_ \_ / \_ 3  
1-10V

2361 \_ \_ / \_ Z  
Casambi



### Materials

Diffuser: Methacrylate. LED support: Aluminum.

### Light Source and electronics


3 x LED STRIP 24V 15,3 W  
Constant Voltage 24V  
220~240V 50/60Hz

### Packaging

1 Box 0,15 x 2,20 x 0,15 m  
Vol 0,05 m³  
Gross weight 5,5 Kg Net weight 4,5 Kg

### Notes

The rotation around a central axis allows for movement of the light sticks in the desired position: perpendicular, vertical, diagonal and progressive, creating wall arts in the space.



## 2362

**Finishes**

- 11/ \_ \_ Black (NCS S 8500-N)
- 23/ \_ \_ Warm White (NCS S 1000-N)

**LED temperature colour**


/2 3000 K  CRI >80 6120 lm 80 lm/W

### Control

2362 \_ \_ / \_ 1  
DALI

2362 \_ \_ / \_ 3  
1-10V

2362 \_ \_ / \_ Z  
Casambi



### Materials

Diffuser: Methacrylate. LED support: Aluminum.

### Light Source and electronics



5 x LED STRIP 24V 15,3 W  
Constant Voltage 24V  
220~240V 50/60Hz

### Packaging

1 Box 0,15 x 3,40 x 0,15 m  
Vol 0,077 m³  
Gross weight 9,5 Kg Net weight 7,5 Kg

### Notes

The rotation around a central axis allows for movement of the light sticks in the desired position: perpendicular, vertical, diagonal and progressive, creating wall arts in the space.

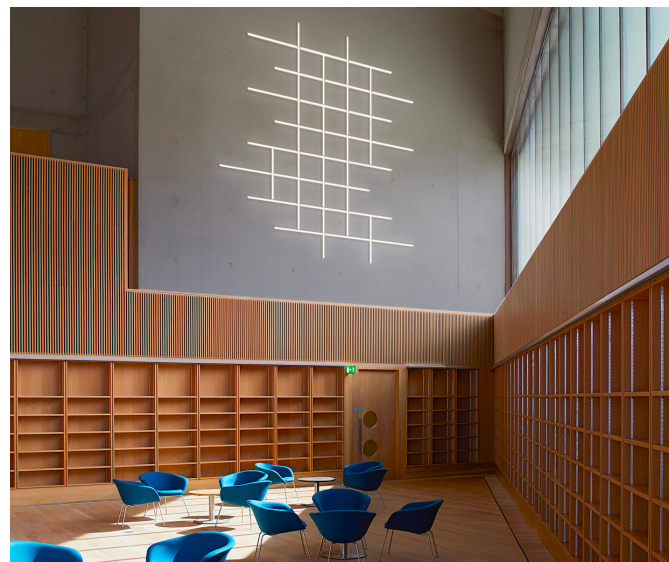

# Cosmos

Design by Lievore, Altherr, Molina


Design and light become one with Cosmos pendant. Flattened spheres in suspension that naturally descend from the ceiling and use light to draw a fluctuating course like a constellation of stars.

## Pendants



ø 19 cm

**2500**



ø 27 cm

**2501**



ø 48 cm

**2502**



55 cm

**2510**



55 cm

**2511**



76 cm


**2515**



86 cm

**2516**

### 2500



#### Finishes

- **14/** \_\_ Chocolate (RAL 8019)
- **62/** \_\_ Green (PANTONE 5645)
- **66/** \_\_ Light-grey (PANTONE 403)

#### LED temperature colour

- /1 2700 K CRI >80 485 lm 121 lm/W
- /3 3500 K CRI >90 512,6 lm 128,2 lm/W

#### Control

- 2500** \_\_ / \_\_ **0**  
On/ Off
- 2500** \_\_ / \_\_ **1**  
DALI-2
- 2500** \_\_ / \_\_ **Z**  
Casambi

#### Materials

Diffuser: Polycarbonate. Body: ABS.  
Canopy Plate: Steel.

#### Light Source and electronics

1 x LED 4,5 W 350mA  
Constant Current 350 mA  
/ 10: 100~240V 50/60Hz  
/ 1B: 110~240V 50/60Hz


#### Packaging

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0180 m³  
Gross weight 1,62 Kg Net weight 1,18 Kg

#### Notes

Extra cable length. **16,00 €/m**

## 2501



**Finishes**

- 14/ \_ \_ Chocolate (RAL 8019)
- 62/ \_ \_ Green (PANTONE 5645)
- 66/ \_ \_ Light-grey (PANTONE 403)

**LED temperature colour**

- /1\_ 2700 K CRI >80 485 lm 121 lm/W
- /3\_ 3500 K CRI >90 512,6 lm 128,2 lm/W

**Control**

2501 \_ \_ / \_ 0  
On/ Off

2501 \_ \_ / \_ 1  
DALI-2

2501 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Body: ABS.  
Canopy Plate: Steel.

### Light Source and electronics

1 x LED 4,5 W 350mA  
Constant Current 350 mA  
/ 10: 100~240V 50/60Hz  
/ 1B: 110~240V 50/60Hz

### Packaging


1 Box 0,42 x 0,42 x 0,25 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,54 Kg Net weight 1,44 Kg

### Notes

Extra cable length. 16,00 €/m

LED IP20 Bi-volt

## 2502



**Finishes**

- 03/ \_ \_ White (RAL 9010)

**LED temperature colour**

- /1\_ 2700 K CRI >80 485 lm 121 lm/W
- /3\_ 3500 K CRI >90 512,6 lm 128,2 lm/W

**Control**

2502 \_ \_ / \_ 1  
DALI-2

2502 \_ \_ / \_ B  
1-10V, Push

2502 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Body: Polyurethane.  
Canopy Plate: Steel.

### Light Source and electronics

1 x LED 4,5 W 350 mA.  
1 x LED 1 W 350 mA.  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging


1 Box 0,60 x 0,60 x 0,27 m  
Vol 0,0970 m<sup>3</sup>  
Gross weight 5,58 Kg Net weight 3,15 Kg

### Notes

Extra cable length. 16,00 €/m

LED IP20 Bi-volt

## 2510



**Finishes**

- 62/ \_ \_ Green, Chocolate and Light-grey (PANTONE 5645, RAL 8019, PANTONE 403)

**LED temperature colour**

- /1\_ 2700 K CRI >80 1455 lm 121 lm/W
- /3\_ 3500 K CRI >90 1537,8 lm 128,2 lm/W

**Control**

2510 \_ \_ / \_ A  
DALI-2, 1-10V, Push

2510 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Body: ABS.  
Canopy Plate: Steel.

### Light Source and electronics

3 x LED 4,5 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

1 Box 0,60 x 0,60 x 0,27 m  
Vol 0,0970 m<sup>3</sup>  
Gross weight 7,54 Kg Net weight 5,11 Kg

### Notes

Compositions and finishes can not be changed

Extra cable length. 16,00 €/m

LED IP20 Bi-volt

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>2511</b></p> | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>62/ _ _ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019)</li> <li>66/ _ _ Light-grey, White and Chocolate (PANTONE 403, RAL 9010, RAL 8019)</li> </ul> <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K  CRI &gt;80 1455 lm 121 lm/W</li> <li>/3 _ 3500 K  CRI &gt;90 1537,8 lm 128,2 lm/W</li> </ul> <p><b>Materials</b></p> <p>Diffuser: Polycarbonate. Body: ABS + Polyurethane.<br/>Canopy Plate: Steel.</p> <p><b>Light Source and electronics</b></p> <p>3 x LED 4,5 W 350 mA<br/>1 x LED 1 W 350 mA<br/>Constant Current 350 mA<br/>110-240V 50/60Hz</p> | <p><b>Control</b></p> <p><b>2511</b> _ _ / _ A<br/>DALI-2, 1-10V, Push</p> <p><b>2511</b> _ _ / _ Z<br/>Casambi</p> <hr/> <p><b>Packaging</b></p> <p>1 Box 0,60 x 0,60 x 0,27 m<br/>Vol 0,0970 m<sup>3</sup><br/>Gross weight 9,25 Kg Net weight 6,82 Kg</p> <p><b>Notes</b></p> <p>Compositions and finishes can not be changed<br/>Extra cable length. <b>16,00 €/m</b></p> <p> </p>  |
| <p><b>2515</b></p> | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>62/ _ _ Green, Chocolate and Light-grey (PANTONE 5645, RAL 8019, PANTONE 403)</li> </ul> <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K  CRI &gt;80 1940 lm 121 lm/W</li> <li>/3 _ 3500 K  CRI &gt;90 2050,5 lm 128,2 lm/W</li> </ul> <p><b>Materials</b></p> <p>Diffuser: Polycarbonate. Body: ABS.<br/>Canopy Plate: Steel.</p> <p><b>Light Source and electronics</b></p> <p>4 x LED 4,5 W 350 mA<br/>Constant Current 350 mA<br/>110-240V 50/60Hz</p>                                                                                                                  | <p><b>Control</b></p> <p><b>2515</b> _ _ / _ A<br/>DALI-2, 1-10V, Push</p> <p><b>2515</b> _ _ / _ Z<br/>Casambi</p> <hr/> <p><b>Packaging</b></p> <p>1 Box 0,76 x 0,76 x 0,27 m<br/>Vol 0,1560 m<sup>3</sup><br/>Gross weight 10,94 Kg Net weight 7,04 Kg</p> <p><b>Notes</b></p> <p>Compositions and finishes can not be changed<br/>Extra cable length. <b>16,00 €/m</b></p> <p> </p> |
| <p><b>2516</b></p> | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>62/ _ _ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019)</li> </ul> <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K  CRI &gt;80 1940 lm 121 lm/W</li> </ul> <p><b>Materials</b></p> <p>Diffuser: Polycarbonate. Body: ABS + Polyurethane.<br/>Canopy Plate: Steel.</p> <p><b>Light Source and electronics</b></p> <p>4 x LED 4,5 W 350 mA<br/>2x LED 1 W 350 mA<br/>Constant Current 350 mA<br/>110-240V 50/60Hz</p>                                                                                                                                           | <p><b>Control</b></p> <p><b>2516</b> _ _ / _ A<br/>DALI-2, 1-10V, Push</p> <p><b>2516</b> _ _ / _ Z<br/>Casambi</p> <hr/> <p><b>Packaging</b></p> <p>1 Box 0,73x0,73x0,32 m<br/>Vol 0,1705 m<sup>3</sup><br/>Gross weight 14,62 Kg Net weight 15,5 Kg</p> <p><b>Notes</b></p> <p>Compositions and finishes can not be changed<br/>Extra cable length. <b>16,00 €/m</b></p> <p> </p>     |






# Structural


Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating sculptural pieces integrated in the architecture.

## Wall

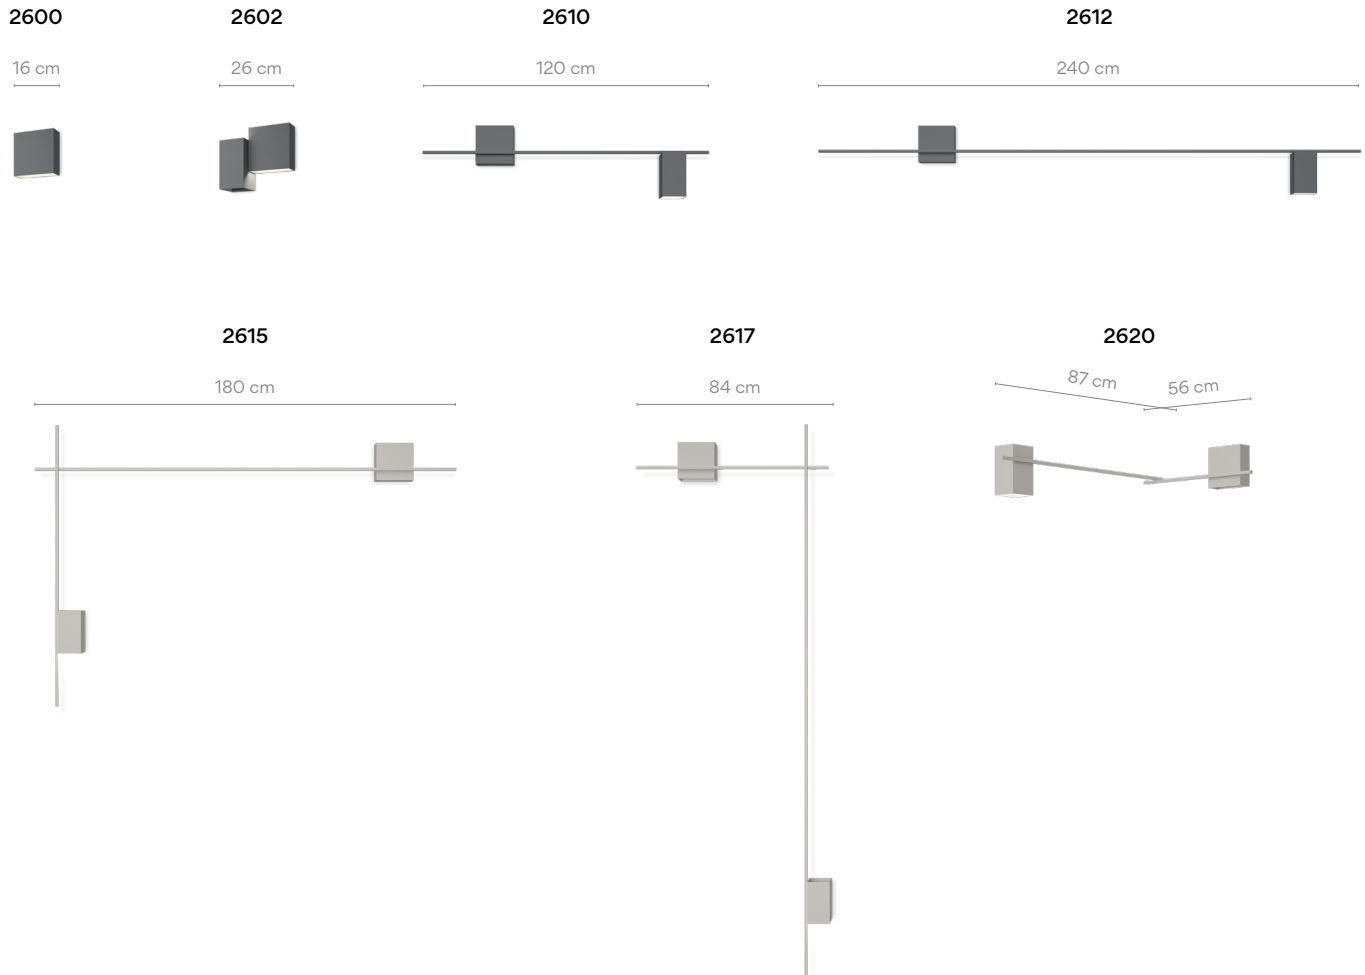

### 2600




|                                                                                                                                                                                                                                                      |                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Finishes</b><br><ul style="list-style-type: none"> <li>● <b>21/ _ _ Black Grey</b><br/>(NCS S 0300-N)</li> <li>● <b>15/ _ _ Grey L2</b><br/>(NCS S 2500-N)</li> </ul> <b>Finish customization</b><br>(Available options:<br>Vibia colour palette) | <b>LED temperature colour</b><br>/2 _ 3000 K<br>CRI >90 756,73 lm 126 lm/W<br>/3 _ 3500 K<br>CRI >90 763,3 lm 127,2 lm/W                                                                               |
|                                                                                                                                                                                                                                                      | <b>Materials</b><br>Diffuser: Polycarbonate. Main body: Aluminum.<br>Structures: Aluminum.<br><b>Light Source and electronics</b><br>1 x LED PLATE 24V 6 W<br>Constant Voltage 24V<br>110~240V 50/60Hz |

|                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------|
| <b>Control</b><br><b>2600 _ _ / _ 1</b><br>DALI-2<br><b>2600 _ _ / _ 3</b><br>1-10V<br><b>2600 _ _ / _ Z</b><br>Casambi |
|-------------------------------------------------------------------------------------------------------------------------|

|                                                                                                       |
|-------------------------------------------------------------------------------------------------------|
| <b>Packaging</b><br>1 Box 0,4 x 0,4 x 0,2 m<br>Vol 0,032 m³<br>Gross weight 1,35 Kg Net weight 0,9 Kg |
|-------------------------------------------------------------------------------------------------------|



## 2602



- Finishes**
- **21/** \_ \_ Black Grey (NCS S 0300-N)
  - **15/** \_ \_ Grey L2 (NCS S 2500-N)
- Finish customization**  
(Available options:  
Vibia colour palette)
- LED temperature colour**
- /2** \_ 3000 K CRI >90 1513,46 lm 126 lm/W
  - /3** \_ 3500 K CRI >90 1526,5 lm 127,2 lm/W

### Control

**2602** \_ \_ / \_ 1  
DALI-2

**2602** \_ \_ / \_ 3  
1-10V

**2602** \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

2 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110~240V 50/60Hz


### Packaging

1 Box 0,4 x 0,4 x 0,2 m  
Vol 0,032 m<sup>3</sup>  
Gross weight 2,85 Kg Net weight 1,9 Kg

### Notes

\* Electrical connection point.

## 2610



- Finishes**
- **21/** \_ \_ Black Grey (NCS S 0300-N)
  - **15/** \_ \_ Grey L2 (NCS S 2500-N)
- Finish customization**  
(Available options:  
Vibia colour palette)
- LED temperature colour**
- /2** \_ 3000 K CRI >90 1513,46 lm 126 lm/W
  - /3** \_ 3500 K CRI >90 1526,5 lm 127,2 lm/W

### Control

**2610** \_ \_ / \_ 1  
DALI-2

**2610** \_ \_ / \_ 3  
1-10V

**2610** \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

1 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110~240V 50/60Hz


### Packaging

2 Boxes  
Total Vol 0,036 m<sup>3</sup>  
Gross weight 3,6 Kg Net weight 2,4 Kg

### Notes

\* Electrical connection point.

## 2612



- Finishes**
- **21/** \_ \_ Black Grey (NCS S 0300-N)
  - **15/** \_ \_ Grey L2 (NCS S 2500-N)
- Finish customization**  
(Available options:  
Vibia colour palette)
- LED temperature colour**
- /2** \_ 3000 K CRI >90 1513,46 lm 126 lm/W
  - /3** \_ 3500 K CRI >90 1526,5 lm 127,2 lm/W

### Control

**2612** \_ \_ / \_ 1  
DALI-2

**2612** \_ \_ / \_ 3  
1-10V

**2612** \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

2 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110~240V 50/60Hz


### Packaging

2 Boxes  
Total Vol 0,042 m<sup>3</sup>  
Gross weight 3,9 Kg Net weight 2,6 Kg

### Notes

\* Electrical connection point.

## 2615



### Finishes

- 21/ \_ \_ Black Grey (NCS S 0300-N)

- 15/ \_ \_ Grey L2 (NCS S 2500-N)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

/2 \_ 3000 K  CRI >90 1513,46 lm 126 lm/W

/3 \_ 3500 K  CRI >90 1526,5 lm 127,2 lm/W

### Control

2615 \_ \_ / \_ 1

DALI-2

2615 \_ \_ / \_ 3

1-10V

2615 \_ \_ / \_ Z

Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

2 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol 0,038 m³  
Gross weight 4,35 Kg Net weight 2,9 Kg

### Notes

\* Electrical connection point.

## 2617



### Finishes

- 21/ \_ \_ Black Grey (NCS S 0300-N)

- 15/ \_ \_ Grey L2 (NCS S 2500-N)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

/2 \_ 3000 K  CRI >90 1513,46 lm 126 lm/W

/3 \_ 3500 K  CRI >90 1526,5 lm 127,2 lm/W

### Control

2617 \_ \_ / \_ 1

DALI-2

2617 \_ \_ / \_ 3

1-10V

2617 \_ \_ / \_ Z

Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

2 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol 0,041 m³  
Gross weight 4,35 Kg Net weight 2,9 Kg

### Notes

\* Electrical connection point.

## 2620



### Finishes

- 21/ \_ \_ Black Grey (NCS S 0300-N)

- 15/ \_ \_ Grey L2 (NCS S 2500-N)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

/2 \_ 3000 K  CRI >90 1513,46 lm 126 lm/W

/3 \_ 3500 K  CRI >90 1526,5 lm 127,2 lm/W

### Control

2620 \_ \_ / \_ 1

DALI-2

2620 \_ \_ / \_ 3

1-10V

2620 \_ \_ / \_ Z

Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

2 x LED PLATE 24V 6 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging


2 Boxes  
Total Vol 0,0356 m³  
Gross weight 3,6 Kg Net weight 2,4 Kg

### Notes


\* Electrical connection point.

## Ceiling

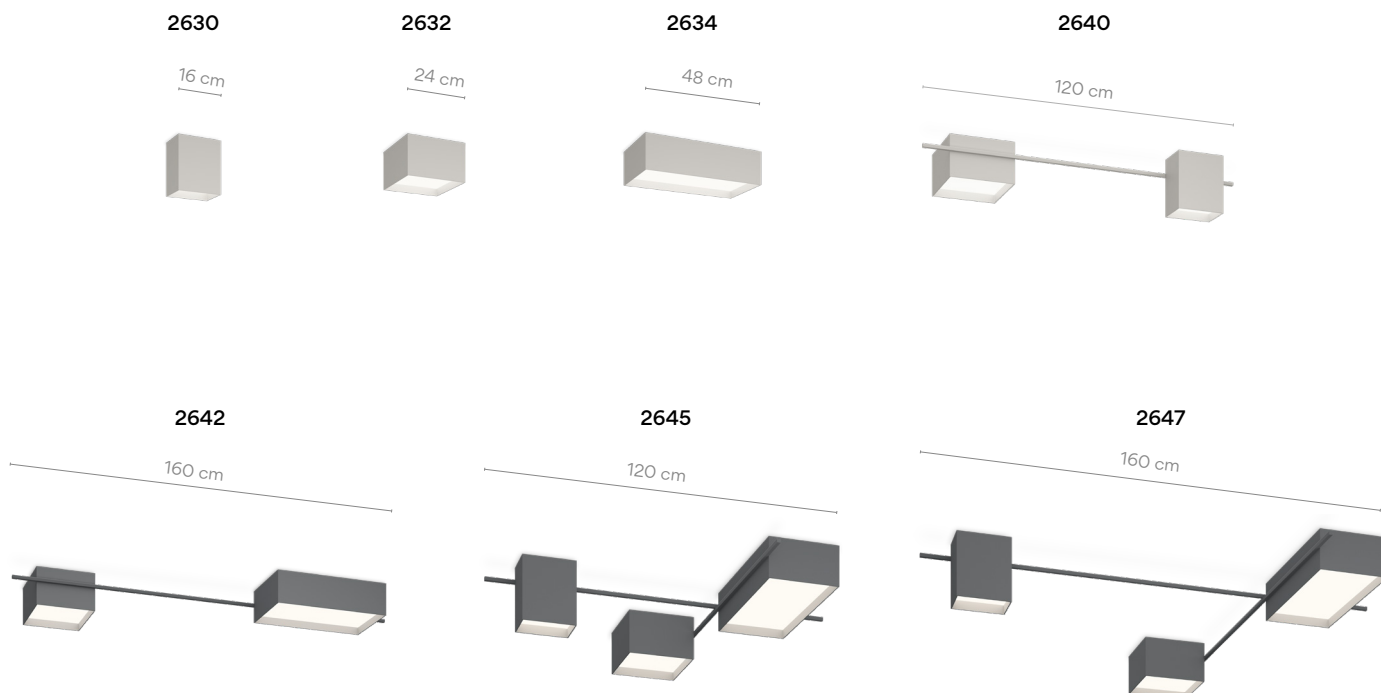

### 2630



#### Finishes

- 21/ \_ \_ Black Grey (NCS S 0300-N)
- 15/ \_ \_ Grey L2 (NCS S 2500-N)

Finish customization  
(Available options:  
Vibia colour palette)

#### LED temperature colour

- /2 \_ 3000 K CRI >90 1078 lm 120 lm/W
- /3 \_ 3500 K CRI >90 1087,3 lm 120,8 lm/W

#### Control

2630 \_ \_ / \_ 1  
DALI-2

2630 \_ \_ / \_ 3  
1-10V

2630 \_ \_ / \_ Z  
Casambi

#### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.


#### Light Source and electronics

1 x LED PLATE 24V 9 W  
Constant Voltage 24V  
110~240V 50/60Hz

#### Packaging

1 Box 0,4 x 0,4 x 0,2 m  
Vol 0,032 m³  
Gross weight 3,75 Kg Net weight 2,5 Kg



**2632**

- Finishes**
- **21/** \_ \_ Black Grey (NCS S 0300-N)
  - **15/** \_ \_ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2** \_ 3000 K CRI >90 2214 lm 148 lm/W
  - /3** \_ 3500 K CRI >90 2233,1 lm 148,9 lm/W

**Finish customization**  
(Available options:  
Vibia colour palette)

**Control**

**2632** \_ \_ / \_ 1  
DALI-2

**2632** \_ \_ / \_ 3  
1-10V

**2632** \_ \_ / \_ Z  
Casambi

**Materials**


Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

**Light Source and electronics**

1 x LED PLATE 24V 15 W  
Constant Voltage 24V  
110~240V 50/60Hz

**Packaging**

1 Box 0,34 x 0,34 x 0,25 m  
Vol 0,029 m<sup>3</sup>  
Gross weight 4,35 Kg Net weight 2,9 Kg

**2634**

- Finishes**
- **21/** \_ \_ Black Grey (NCS S 0300-N)
  - **15/** \_ \_ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2** \_ 3000 K CRI >90 4428 lm 148 lm/W
  - /3** \_ 3500 K CRI >90 4466,2 lm 148,9 lm/W

**Finish customization**  
(Available options:  
Vibia colour palette)

**Control**

**2634** \_ \_ / \_ 1  
DALI-2

**2634** \_ \_ / \_ 3  
1-10V

**2634** \_ \_ / \_ Z  
Casambi

**Materials**


Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

**Light Source and electronics**

1 x LED PLATE 24V 30 W  
Constant Voltage 24V  
110~240V 50/60Hz

**Packaging**

1 Box 0,58 x 0,34 x 0,23 m  
Vol 0,045 m<sup>3</sup>  
Gross weight 5,85 Kg Net weight 3,9 Kg

**2640**

- Finishes**
- **21/** \_ \_ Black Grey (NCS S 0300-N)
  - **15/** \_ \_ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2** \_ 3000 K CRI >90 3292 lm 137 lm/W
  - /3** \_ 3500 K CRI >90 3320,4 lm 138,3 lm/W

**Finish customization**  
(Available options:  
Vibia colour palette)

**Control**

**2640** \_ \_ / \_ 1  
DALI-2

**2640** \_ \_ / \_ 3  
1-10V

**2640** \_ \_ / \_ Z  
Casambi

**Materials**

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

**Light Source and electronics**

1 x LED PLATE 24V 9 W  
1 x LED PLATE 24V 15 W  
Constant Voltage 24V  
110~240V 50/60Hz


**Packaging**

3 Boxes  
Total Vol 0,15 m<sup>3</sup>  
Gross weight 8,25 Kg Net weight 5,5 Kg

**Notes**

\* Electrical connection point.

## 2642



### Finishes

- 21/ \_ \_ Black Grey (NCS S 0300-N)
- 15/ \_ \_ Grey L2 (NCS S 2500-N)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /2 \_ 3000 K CRI >90 6642 lm 148 lm/W
- /3 \_ 3500 K CRI >90 6699,3 lm 148,9 lm/W

### Control

- 2642 \_ \_ / \_ 1 DALI-2
- 2642 \_ \_ / \_ 3 1-10V
- 2642 \_ \_ / \_ Z Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

1 x LED PLATE 24V 15 W  
1 x LED PLATE 24V 30 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging


1 Box 0,25 x 0,60 x 1,7 m  
Vol 0,255 m<sup>3</sup>  
Gross weight 11,25 Kg Net weight 7,5 Kg

### Notes

\* Electrical connection point.



## 2645



### Finishes

- 21/ \_ \_ Black Grey (NCS S 0300-N)
- 15/ \_ \_ Grey L2 (NCS S 2500-N)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /2 \_ 3000 K CRI >90 7720 lm 143 lm/W
- /3 \_ 3500 K CRI >90 7786,6 lm 144,2 lm/W

### Control

- 2645 \_ \_ / \_ 1 DALI-2
- 2645 \_ \_ / \_ 3 1-10V
- 2645 \_ \_ / \_ Z Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

1 x LED PLATE 24V 9 W  
1 x LED PLATE 24V 15 W  
1 x LED PLATE 24V 30 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging


1 Box 0,25 x 1,2 x 1,2 m  
Vol 0,42 m<sup>3</sup>  
Gross weight 14,25 Kg Net weight 9,25 Kg

### Notes

\* Electrical connection point.



## 2647



### Finishes

- 21/ \_ \_ Black Grey (NCS S 0300-N)
- 15/ \_ \_ Grey L2 (NCS S 2500-N)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /2 \_ 3000 K CRI >90 7720 lm 143 lm/W
- /3 \_ 3500 K CRI >90 7786,6 lm 144,2 lm/W

### Control

- 2647 \_ \_ / \_ 1 DALI-2
- 2647 \_ \_ / \_ 3 1-10V
- 2647 \_ \_ / \_ Z Casambi

### Materials

Diffuser: Polycarbonate. Main body: Aluminum.  
Structures: Aluminum.

### Light Source and electronics

1 x LED PLATE 24V 9 W  
1 x LED PLATE 24V 15 W  
1 x LED PLATE 24V 30 W  
Constant Voltage 24V  
110~240V 50/60Hz

### Packaging

1 Box 0,25 x 1,7 x 1,7 m  
Vol 0,72 m<sup>3</sup>  
Gross weight 15,3 Kg Net weight 10,2 Kg

### Notes

\* Electrical connection point.




# Class


Design by Sebastian Herkner

Timeless, elegant and enduring, Class brings the refined, intimate aesthetic of a patio light with the functional performance of a bollard. Rather than silently integrating into the garden environment, it stands handsome and proud, its cylindrical glass luminaire radiating with a soft, diffuse and indirect light.

## Outdoor

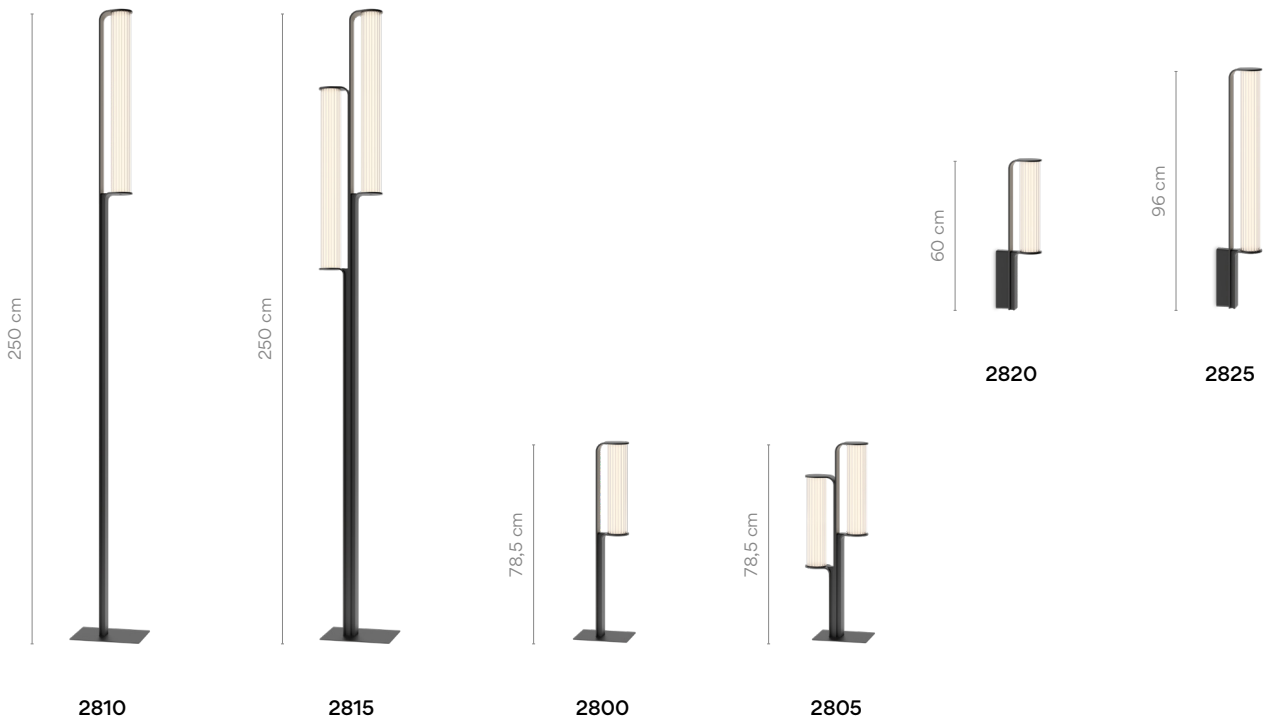

### 2800



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K **G**  
 CRI >90 1188 lm 198 lm/W

**Control**  
 2800 \_ \_ / \_ 1  
 DALI

2800 \_ \_ / \_ 5  
 Push

2800 \_ \_ / \_ Z \_ 30  
 Casambi (Remote)

**Materials**  
 Body: Aluminium. Glass: Borosilicate glass.  
 Diffuser: Opal polycarbonate.


**Light Source and electronics**  
 1 x LED 3,5W 150 mA  
 Constant Current 150 mA  
 220~240V. 50/60Hz

**Packaging**  
 2 Boxes  
 Box 1: 0,95 x 0,30 x 0,30 m  
 Box 2: 0,31 x 0,31 x 0,21 m  
 Total Vol 0,11 m<sup>3</sup>  
 Gross weight 11,6 Kg Net weight 9,6 Kg

LED ☐ IP65 CE EAC



## 2805



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 2376 lm 198 lm/W

**Control**  
 2805 \_ \_ / \_ 1  
 DALI  
 2805 \_ \_ / \_ 5  
 Push  
 2805 \_ \_ / \_ Z  
 Casambi (Remote)


**Materials**  
 Body: Aluminium. Glass: Borosilicate glass.  
 Diffuser: Opal polycarbonate.

**Light Source and electronics**  
 2 x LED 3,5W 150 mA  
 Constant Current 300 mA  
 220~240V. 50/60Hz

**Packaging**  
 2 Boxes  
 Box 1: 0,95 x 0,30 x 0,30 m  
 Box 2: 0,31 x 0,31 x 0,21 m  
 Total Vol 0,11 m<sup>3</sup>  
 Gross weight 14,8 Kg Net weight 12,8 Kg

LED IP65

## 2810



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 2376 lm 198 lm/W

**Control**  
 2810 \_ \_ / \_ 1  
 DALI  
 2810 \_ \_ / \_ 5  
 Push  
 2810 \_ \_ / \_ Z 30  
 Casambi (Remote)


**Materials**  
 Body: Aluminium. Glass: Borosilicate glass.  
 Diffuser: Opal polycarbonate.

**Light Source and electronics**  
 1 x LED 7W 300 mA  
 Constant Current 300 mA  
 220~240V. 50/60Hz

**Packaging**  
 2 Boxes  
 Box 1: 2,92 x 0,32 x 0,32 m  
 Box 2: 0,37 x 0,32 x 0,22 m  
 Total Vol 0,33 m<sup>3</sup>  
 Gross weight 20,5 Kg Net weight 17,5 Kg

LED IP20

## 2815



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 4752 lm 198 lm/W


**Control**  
 2815 \_ \_ / \_ 1  
 DALI  
 2815 \_ \_ / \_ 5  
 Push  
 2815 \_ \_ / \_ Z 30  
 Casambi (Remote)

**Materials**  
 Body: Aluminium. Glass: Borosilicate glass.  
 Diffuser: Opal polycarbonate.

**Light Source and electronics**  
 2 x LED 7W 300 mA  
 Constant Current 600 mA  
 220~240V. 50/60Hz

**Packaging**  
 2 Boxes  
 Box 1: 2,92 x 0,32 x 0,32 m  
 Box 2: 0,37 x 0,32 x 0,22 m  
 Total Vol 0,33 m<sup>3</sup>  
 Gross weight 28,4 Kg Net weight 25,4 Kg

LED IP65

|                                                                                                              |                                                                                              |
|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <div>2820</div> <div></div> | <div>Finishes</div> <div><div><div>●</div>11/ _ _ Black</div><div>(NCS S 8500-N)</div></div> |
|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|







# Dama


Design by Ludovica+Roberto Palomba

Combining technical quality and refinement with a layer of warmth and intimacy, the Dama collection connects the charm of tradition with the finesse of contemporary lighting design.

## Table Floor Pendants



### 3225



#### Finishes

- 11/ \_ \_ Black  
(NCS S 8500-N)
- 25/ \_ \_ Beige D1  
(NCS S 4005-Y50R)

#### LED temperature colour

/1 \_ 2700 K   
CRI >90 1850 lm 120 lm/W

#### Control

3225 \_ \_ / \_ 5  
Push

3225 \_ \_ / \_ Z  
Casambi

#### Materials

Tube: Steel. Base: Zamak.  
Shade: Paper.

#### Light Source and electronics

1 x LED STRIP 16,2W 900 mA  
Constant Voltage 24V  
100~240V. 50/60Hz

#### Packaging


1 Box 0,75 x 0,55 x 0,55 m  
Vol 0,23 m<sup>3</sup>  
Gross weight 3,3 Kg Net weight 1,8 Kg

#### Notes

Electric cable 2,5 m

  IP20  CE  EAC  Bi-volt

### 3230

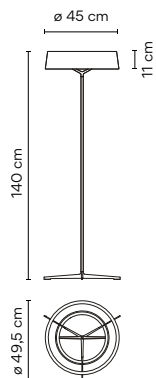

**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)  
 ● 25/ \_ \_ Beige D1  
 (NCS S 4005-Y50R)

**LED temperature colour**  
 /1\_ 2700 K   
 CRI >90 1850 lm 120 lm/W

**Control**  
 3230 \_ \_ / \_ 5  
 Push  
 3230 \_ \_ / \_ Z  
 Casambi

#### Materials

Tube: Steel. Base: Zamak.  
 Shade: Paper.

**Light Source and electronics**  
 1 x LED STRIP 16,2W 900 mA  
 Constant Voltage 24V  
 100-240V. 50/60Hz

#### Packaging


1 Box 1,6 x 0,55 x 0,55 m  
 Vol 0,48 m³  
 Gross weight 5 Kg Net weight 2,55 Kg

#### Notes

Electric cable 2,5 m

LED  IP20  EAC  Bi-volt

### 3235



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)  
 ● 25/ \_ \_ Beige D1  
 (NCS S 4005-Y50R)

**LED temperature colour**  
 /1\_ 2700 K   
 CRI >90 1850 lm 120 lm/W

**Control**  
 3235 \_ \_ / \_ 1  
 DALI

3235 \_ \_ / \_ B  
 1-10V, Push

3235 \_ \_ / \_ Z  
 Casambi

#### Materials

Body: Aluminium.  
 Shade: Paper.

**Light Source and electronics**  
 1 x LED STRIP 16,2W 900 mA  
 Constant Current 900 mA  
 110-240V. 50/60Hz

#### Packaging

1 Box 0,40 x 0,55 x 0,55 m  
 Vol 0,12 m³  
 Gross weight 3,2 Kg Net weight 1,6 Kg

#### Notes

Extra cable length. 16,00 €/m

LED  IP20  EAC  Bi-volt

**Electrical connection**  
 Surface  
 \_18 Free Wire  
 \_23 Built-in  
 \_31 Remote  
 Micro  
 for plaster  
 ceilings  
 \_32 Remote  
 XXS  
 for all types  
 of drop  
 ceilings



# Electrical connection options for model 3235


Choose your preferred installation option according to your needs.  
For each composition, the optimal minimum number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 3235

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.




---

## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 3235


### Surface




ø 20 cm  
match with  
fixture finish.



### Free Wire




ø 20 cm




ø 22 cm


you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.



ø 36 cm



ø 40 cm




# Palma


Design by Antoni Arola

The interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions. Palma connects light and vegetation as in the natural landscape.

## Wall

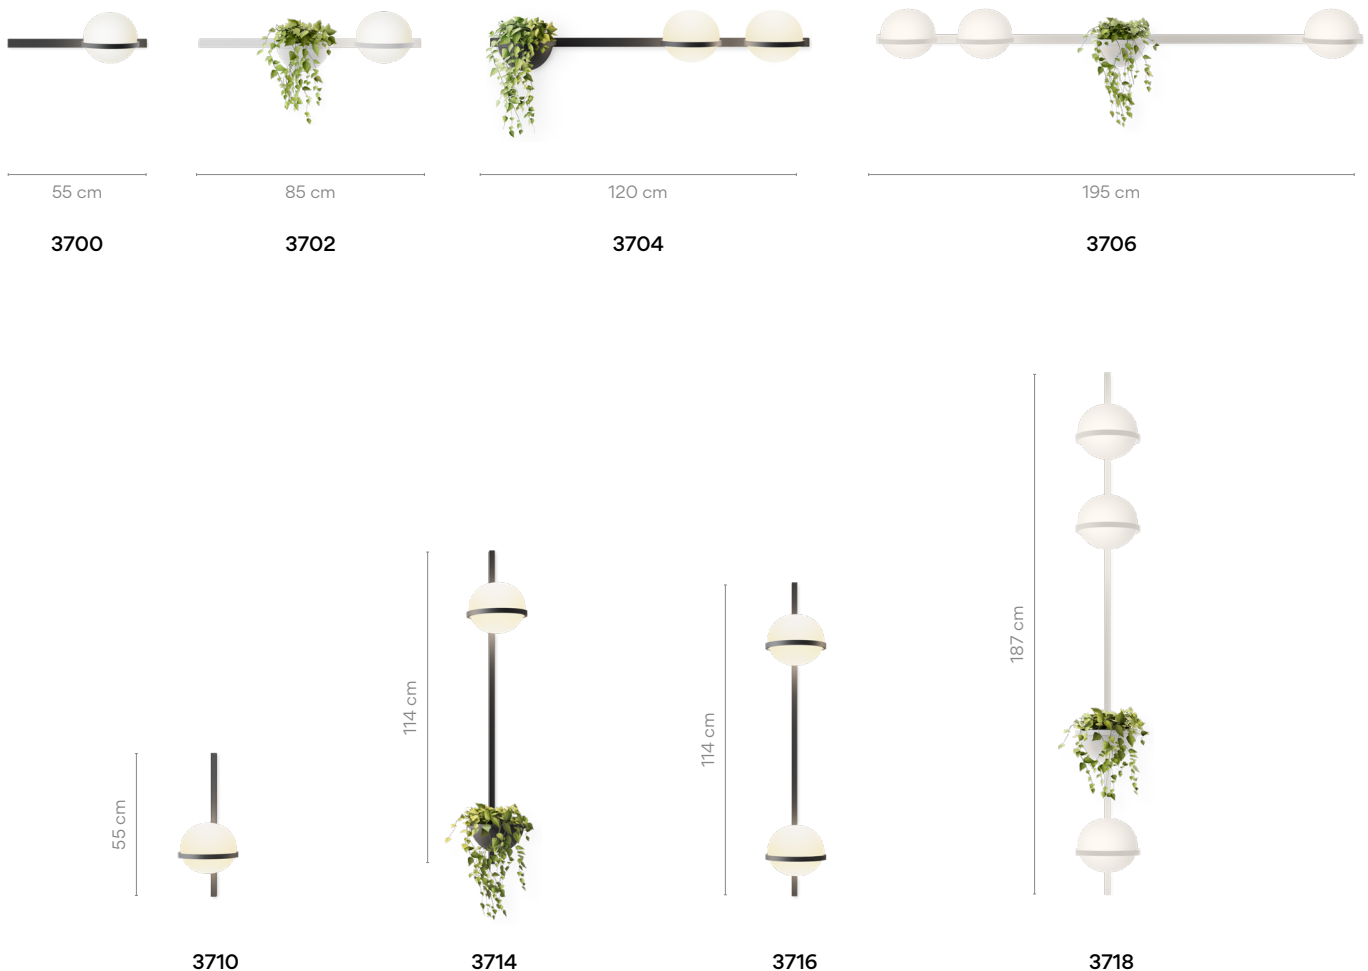

### 3700




| Finishes                                 | LED temperature colour                                                                         |
|------------------------------------------|------------------------------------------------------------------------------------------------|
| ● 18/ __ Graphite<br>(ADAPTA RF 9913 WX) | /1_ 2700 K  |
| ● 93/ __ White<br>(RAL 9016)             | CRI >90 868 lm 94 lm/W                                                                         |

**Materials**  
Diffuser: Blown-glass. Profile: Aluminum.

**Light Source and electronics**  
2 x LED 4,6 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz


**Control**  
3700 \_\_ / \_\_ B  
1-10V, Push

**Packaging**  
1 Box 0,57 x 0,31 x 0,21 m  
Vol 0,0382 m<sup>3</sup>  
Gross weight 3 Kg Net weight 1,8 Kg





### 3702




| Finishes                                  | LED temperature colour                                                                       |
|-------------------------------------------|----------------------------------------------------------------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF 9913 WX) | /1_ 2700 K  |
| ● 93/ _ _ White<br>(RAL 9016)             | CRI >90 868 lm 87 lm/W                                                                       |

| Control                       |
|-------------------------------|
| 3702 _ _ / _ 1<br>DALI        |
| 3702 _ _ / _ B<br>1-10V, Push |


**Materials**  
Diffuser: Blown-glass. Profile: Aluminum.  
Planter: PMMA.

**Light Source and electronics**  
2 x LED 4,6 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz

**Packaging**  
1 Box 0,87 x 0,31 x 0,21 m  
Vol 0,0581 m<sup>3</sup>  
Gross weight 4,05 Kg Net weight 2,4 Kg



### 3704




| Finishes                                  | LED temperature colour                                                                       |
|-------------------------------------------|----------------------------------------------------------------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF 9913 WX) | /1_ 2700 K  |
| ● 93/ _ _ White<br>(RAL 9016)             | CRI >90 1736 lm 87 lm/W                                                                      |

| Control                       |
|-------------------------------|
| 3704 _ _ / _ 1<br>DALI        |
| 3704 _ _ / _ B<br>1-10V, Push |


**Materials**  
Diffuser: Blown-glass. Profile: Aluminum.  
Planter: PMMA.

**Light Source and electronics**  
4 x LED 4,6 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,0081 m<sup>3</sup>  
Gross weight 6,2 Kg Net weight 3,9 Kg



### 3706




| Finishes                                  | LED temperature colour                                                                         |
|-------------------------------------------|------------------------------------------------------------------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF 9913 WX) | /1_ 2700 K  |
| ● 93/ _ _ White<br>(RAL 9016)             | CRI >90 2604 lm 87 lm/W                                                                        |

| Control                       |
|-------------------------------|
| 3706 _ _ / _ 1<br>DALI        |
| 3706 _ _ / _ B<br>1-10V, Push |


**Materials**  
Diffuser: Blown-glass. Profile: Aluminum.  
Planter: PMMA.

**Light Source and electronics**  
6 x LED 4,6 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,1793 m<sup>3</sup>  
Gross weight 6,4 Kg Net weight 3,9 Kg



### 3710




| Finishes                                  | LED temperature colour                                                                         |
|-------------------------------------------|------------------------------------------------------------------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF 9913 WX) | /1_ 2700 K  |
| ● 93/ _ _ White<br>(RAL 9016)             | CRI >90 868 lm 87 lm/W                                                                         |


| Control                       |
|-------------------------------|
| 3710 _ _ / _ B<br>1-10V, Push |


**Materials**  
Diffuser: Blown-glass. Profile: Aluminum.


**Light Source and electronics**  
2 x LED 4,6 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz

**Packaging**  
1 Box 0,57 x 0,31 x 0,21 m  
Vol 0,0382 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,8 Kg



|                                                                                                   |                                                                                                                                                                                                                       |                                                                                                                                                                                                     |                                                                                                                                   |
|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <div>3714</div>  | <div>Finishes</div> <div><div><div></div><div>18/ _ _ Graphite</div><div>(ADAPTA RF 9913 WX)</div></div><div><div></div><div>93/ _ _ White</div><div>(RAL 9016)</div></div></div>                                     | <div>LED temperature colour</div> <div><div>/1 _ 2700 K</div><div>F</div><div>CRI &gt;90 868 lm 87 lm/W</div></div>                                                                                 | <div>Control</div> <div><div>3714 _ _ / _ 1</div><div>DALI</div></div> <div><div>3714 _ _ / _ B</div><div>1-10V, Push</div></div> |
|                                                                                                   | <div>Materials</div> <div>Diffuser: Blown-glass. Profile: Aluminum.<br/>Planter: PMMA.</div> <div>Light Source and electronics</div> <div>2 x LED 4,6 W 500 mA<br/>Constant Current 500 mA<br/>220~240V 50/60Hz</div> | <div>Packaging</div> <div>2 Boxes<br/>Total Vol 0,0081 m³<br/>Gross weight 5,2 Kg Net weight 2,9 Kg</div> <div><div>LED</div><div></div><div>IP20</div><div>CE</div><div>EAC</div><div></div></div> |                                                                                                                                   |


|                                                                                                    |                                                                                                                                                                                                    |                                                                                                                                                                                                     |                                                                                                                                   |
|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <div>3716</div>  | <div>Finishes</div> <div><div><div></div><div>18/ _ _ Graphite</div><div>(ADAPTA RF 9913 WX)</div></div><div><div></div><div>93/ _ _ White</div><div>(RAL 9016)</div></div></div>                  | <div>LED temperature colour</div> <div><div>/1 _ 2700 K</div><div>F</div><div>CRI &gt;90 1736 lm 87 lm/W</div></div>                                                                                | <div>Control</div> <div><div>3716 _ _ / _ 1</div><div>DALI</div></div> <div><div>3716 _ _ / _ B</div><div>1-10V, Push</div></div> |
|                                                                                                    | <div>Materials</div> <div>Diffuser: Blown-glass. Profile: Aluminum.</div> <div>Light Source and electronics</div> <div>4 x LED 4,6 W 500 mA<br/>Constant Current 500 mA<br/>220~240V 50/60Hz</div> | <div>Packaging</div> <div>2 Boxes<br/>Total Vol 0,0081 m³<br/>Gross weight 6,5 Kg Net weight 4,2 Kg</div> <div><div>LED</div><div></div><div>IP20</div><div>CE</div><div>EAC</div><div></div></div> |                                                                                                                                   |

|                                                                                                     |                                                                                                                                                                                                                       |                                                                                                                                                                                                     |                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <div>3718</div>  | <div>Finishes</div> <div><div><div></div><div>18/ _ _ Graphite</div><div>(ADAPTA RF 9913 WX)</div></div><div><div></div><div>93/ _ _ White</div><div>(RAL 9016)</div></div></div>                                     | <div>LED temperature colour</div> <div><div>/1 _ 2700 K</div><div>F</div><div>CRI &gt;90 2604 lm 87 lm/W</div></div>                                                                                | <div>Control</div> <div><div>3718 _ _ / _ 1</div><div>DALI</div></div> <div><div>3718 _ _ / _ B</div><div>1-10V, Push</div></div> |
|                                                                                                     | <div>Materials</div> <div>Diffuser: Blown-glass. Profile: Aluminum.<br/>Planter: PMMA.</div> <div>Light Source and electronics</div> <div>6 x LED 4,6 W 500 mA<br/>Constant Current 500 mA<br/>220~240V 50/60Hz</div> | <div>Packaging</div> <div>2 Boxes<br/>Total Vol 0,1793 m³<br/>Gross weight 8,6 Kg Net weight 6,1 Kg</div> <div><div>LED</div><div></div><div>IP20</div><div>CE</div><div>EAC</div><div></div></div> |                                                                                                                                   |

## Pendants



## 3720



**Finishes**  
 ● 18/ \_ \_ Graphite (ADAPTA RF 9913 WX)  
 ● 93/ \_ \_ White (RAL 9016)

**LED temperature colour**  
 /1\_ 2700 K  CRI >90 868 lm 87 lm/W

**Control**  
 3720 \_ \_ / \_ 1  
 DALI

3720 \_ \_ / \_ B  
 1-10V, Push

3720 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Blown-glass. Profile: Aluminum.


**Light Source and electronics**  
 2 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,71 x 0,27 x 0,21 m  
 Vol 0,0413 m<sup>3</sup>  
 Gross weight 3,75 Kg Net weight 2,8 Kg

**Notes**  
 Extra cable length. 16,00 €/m

LED  IP20  EAC  Bi-volt

## 3724



**Finishes**  
 ● 18/ \_ \_ Graphite (ADAPTA RF 9913 WX)  
 ● 93/ \_ \_ White (RAL 9016)

**LED temperature colour**  
 /1\_ 2700 K  CRI >90 868 lm 87 lm/W

**Control**  
 3724 \_ \_ / \_ 1  
 DALI

3724 \_ \_ / \_ B  
 1-10V, Push

3724 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Blown-glass. Profile: Aluminum.  
 Planter: PMMA.


**Light Source and electronics**  
 2 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 1,02 x 0,27 x 0,21 m  
 Vol 0,0588 m<sup>3</sup>  
 Gross weight 4,6 Kg Net weight 3,3 Kg

**Notes**  
 Extra cable length. 16,00 €/m

LED  IP20  EAC  Bi-volt

## 3726



**Finishes**  
 ● 18/ \_ \_ Graphite (ADAPTA RF 9913 WX)  
 ● 93/ \_ \_ White (RAL 9016)

**LED temperature colour**  
 /1\_ 2700 K  CRI >90 1736 lm 87 lm/W

**Control**  
 3726 \_ \_ / \_ 1  
 DALI

3726 \_ \_ / \_ B  
 1-10V, Push

3726 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Blown-glass. Profile: Aluminum.


**Light Source and electronics**  
 4 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 1,02 x 0,27 x 0,21 m  
 Vol 0,0588 m<sup>3</sup>  
 Gross weight 5,4 Kg Net weight 4,1 Kg

**Notes**  
 Extra cable length. 16,00 €/m

LED  IP20  EAC  Bi-volt

## 3728



**Finishes**  
 ● 18/ \_ \_ Graphite (ADAPTA RF 9913 WX)  
 ● 93/ \_ \_ White (RAL 9016)

**LED temperature colour**  
 /1\_ 2700 K  CRI >90 1736 lm 87 lm/W

**Control**  
 3728 \_ \_ / \_ 1  
 DALI

3728 \_ \_ / \_ B  
 1-10V, Push

3728 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Blown-glass. Profile: Aluminum.  
 Planter: PMMA.


**Light Source and electronics**  
 4 x LED 4,6 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,75 x 0,53 x 0,21 m  
 Vol 0,0857 m<sup>3</sup>  
 Gross weight 8,8 Kg Net weight 4,7 Kg

**Notes**  
 Extra cable length. 16,00 €/m

LED  IP20  EAC  Bi-volt

### 3730



| Finishes                                  | LED temperature colour              |
|-------------------------------------------|-------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF 9913 WX) | /1_ 2700 K  CRI >90 2604 lm 87 lm/W |
| ● 93/ _ _ White<br>(RAL 9016)             |                                     |

Control  
3730 \_ \_ / \_ A  
DALI, 1-10V, Push

3730 \_ \_ / \_ Z  
Casambi


**Materials**  
Diffuser: Blown-glass. Profile: Aluminum.

**Light Source and electronics**  
6 x LED 4,6 W 500 mA  
Constant Current 500 mA  
110~240V 50/60Hz

**Packaging**  
1 Box 0,75 x 0,53 x 0,21 m  
Vol 0,0857 m<sup>3</sup>  
Gross weight 9,5 Kg Net weight 5,4 Kg

**Notes**  
Extra cable length. 16,00 €/m

### 3734



| Finishes                                  | LED temperature colour               |
|-------------------------------------------|--------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF 9913 WX) | /1_ 2700 K  CRI >90 2265 lm 103 lm/W |
| ● 93/ _ _ White<br>(RAL 9016)             |                                      |

Control  
3734 \_ \_ / \_ A  
DALI, 1-10V, Push

3734 \_ \_ / \_ Z  
Casambi


**Materials**  
Diffuser: Blown-glass. Profile: Aluminum.  
Planter: PMMA.

**Light Source and electronics**  
1 x LED 2 W 500 mA  
4 x LED 4,6 W 500 mA  
Constant Current 500 mA  
110~240V 50/60Hz

**Packaging**  
1 Box 1,72 x 0,33 x 0,31 m  
Vol 0,1790 m<sup>3</sup>  
Gross weight 9,4 Kg Net weight 5,95 Kg

**Notes**  
Extra cable length. 16,00 €/m

### 3736



| Finishes                                  | LED temperature colour              |
|-------------------------------------------|-------------------------------------|
| ● 18/ _ _ Graphite<br>(ADAPTA RF 9913 WX) | /1_ 2700 K  CRI >90 3133 lm 98 lm/W |
| ● 93/ _ _ White<br>(RAL 9016)             |                                     |

Control  
3736 \_ \_ / \_ A  
DALI, 1-10V, Push

3736 \_ \_ / \_ Z  
Casambi

**Materials**  
Diffuser: Blown-glass. Profile: Aluminum.  
Planter: PMMA.

**Light Source and electronics**  
1 x LED 2 W 500 mA  
6 x LED 4,6 W 500 mA  
Constant Current 500 mA  
110~240V 50/60Hz

**Packaging**  
2 Boxes  
Vol 0,1793 m<sup>3</sup>  
Gross weight 9,1 Kg Net weight 6,6 Kg

**Notes**  
Extra cable length. 16,00 €/m


Table



ø 22 cm

3740

3740



Finishes

- 18/ \_ \_ Graphite (ADAPTA RF 9913 WX)
- 93/ \_ \_ White (RAL 9016)

LED temperature colour

/1\_ 2700 K  CRI >90 868,0 lm 94 lm/W

Control

3740 \_ \_ / \_ 5  
Push

Materials

Diffuser: Blown-glass. Profile: Aluminum.  
Rods: Steel.

Light Source and electronics

2 x LED 4,6 W 500 mA  
Constant Current 500 mA  
100~240V 50/60Hz

Packaging

1 Box 0,24 x 0,24 x 0,49 m  
Vol 0,0282 m³  
Gross weight 1,7 Kg Net weight 1,2 Kg

Notes

Electric cable with plug and  
push-button (3m).










# Plis Outdoor

Design by Ramos & Bassols


A surprising design which brings the warm atmosphere and textures of the indoors to the garden, terrace or porch. Breaking down boundaries between inside and outside.

## Outdoor

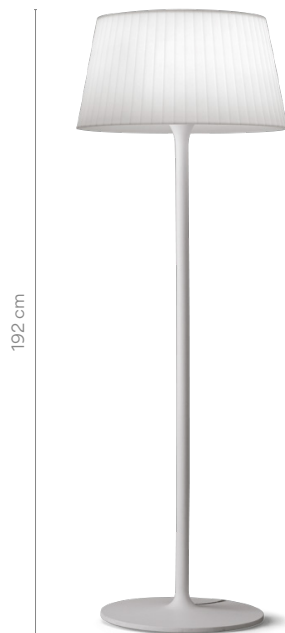

4630 4635

### 4030



**Finishes**  
● 03 White  
(RAL 9016)

LED 2700 K 1520 lm Dim

4030 03

#### Materials

Diffuser: Polyethylene. Base: Polyurethane foam.  
Lid: Steel.

#### Light Source and electronics

2 x E27 230V 12 W

#### Packaging


1 Box 1,99 x 0,75 x 0,76 m  
Vol 1,1430 m<sup>3</sup>  
Gross weight 40,5 Kg Net weight 29,5 Kg

#### Notes

Portable version. Surface cable 3,5 m



### 4035



**Finishes**  
● 03 White  
(RAL 9016)

LED 2700 K 1520 lm Dim

4035 03

#### Materials

Diffuser: Polyethylene. Base: Polyurethane foam.  
Lid: Steel.

#### Light Source and electronics

2 x E27 230V 12 W

#### Packaging

1 Box 1,99 x 0,75 x 0,76 m  
Vol 1,1430 m<sup>3</sup>  
Gross weight 40,5 Kg Net weight 29,5 Kg

#### Notes

Built-in cable








# Wind

Design by Jordi Vilardell

A perfect marriage of technology and tradition. Wind's drum shade is made of fibreglass, an innovative webbed texture and pattern that elevates the visual contribution of this timeless silhouette.

## Outdoor



ø 60 cm

4072



ø 60 cm

4077



ø 120 cm

4077




191 cm

4057



195 cm


4062

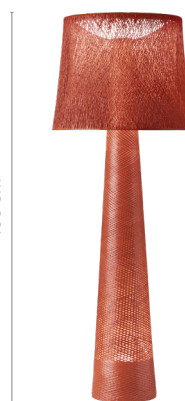

166 cm

4067

### 4057



#### Finishes

- 27/ \_ \_ Brown L1  
(NCS S 1505-Y50R)
- 53/ \_ \_ Green M1  
(NCS S 6005-G80Y)
- 61/ \_ \_ Ocre red  
(NCS S 3050-Y60R)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 3299,09 lm 132 lm/W

#### Control

4057 \_ \_ / \_ 0  
On/ Off

#### Materials

Shade: Filament winding. Weight: Concrete.  
Lid: Steel. Diffuser: Methacrylate.

#### Light Source and electronics

1 x LED PLATE 25 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

#### Packaging


2 Boxes  
Total Vol 1,0300 m³  
Gross weight 45,1 Kg Net weight 27,8 Kg

#### Notes


Portable version. Electric cable 3,5 m



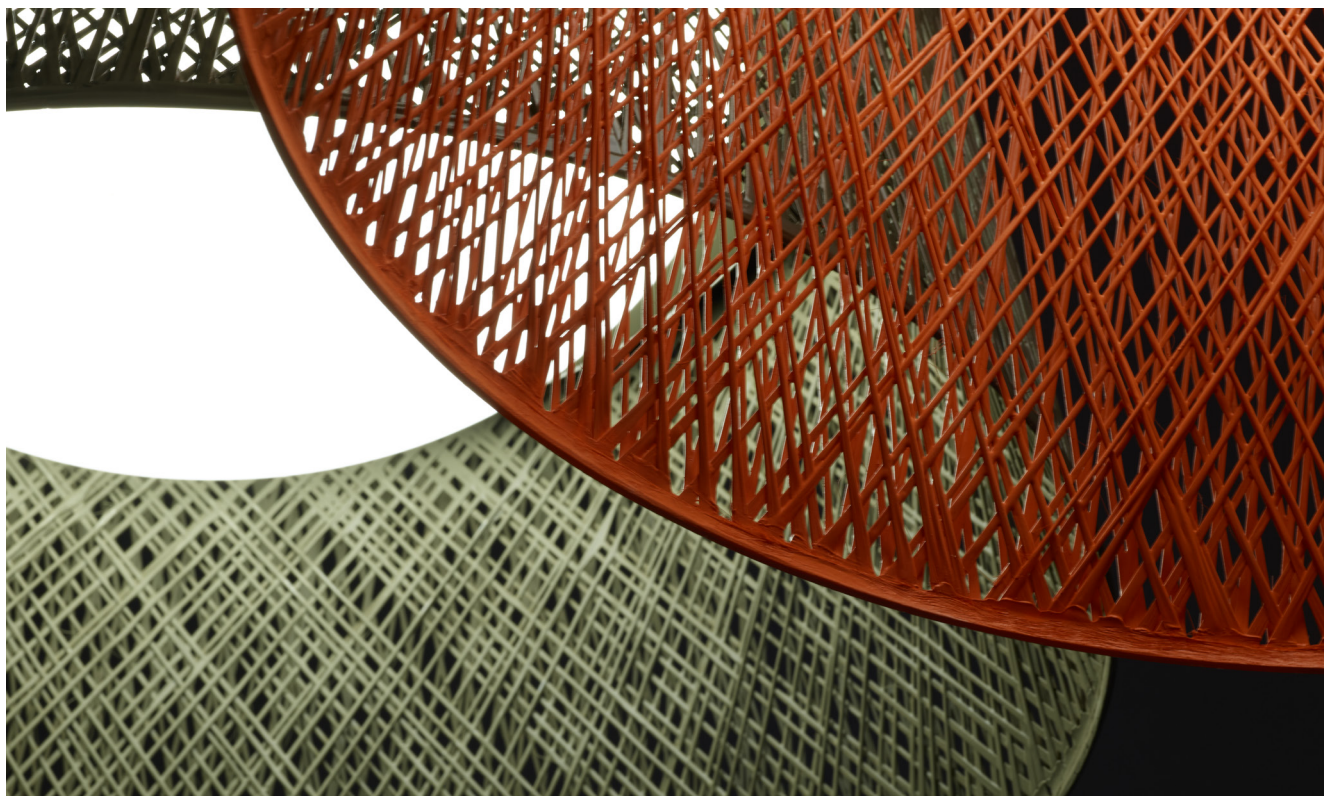

#### 4062

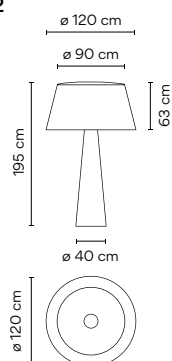

##### Finishes

- 27/ \_ \_ Brown L1  
(NCS S 1505-Y50R)
- 53/ \_ \_ Green M1  
(NCS S 6005-G80Y)
- 61/ \_ \_ Ocre red  
(NCS S 3050-Y60R)

##### LED temperature colour

/1\_ 2700 K   
CRI >90 3481,09 lm 129 lm/W

##### Control

4062 \_ \_ / \_ 0  
On/ Off

##### Materials

Base: Filament winding. Shade: Filament winding.  
Diffuser: Methacrylate.

##### Light Source and electronics

3 x LED PLATE 25 W 700 mA  
1 x LED 2,4 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz


##### Packaging

4 Boxes  
Total Vol 2,3500 m<sup>3</sup>  
Gross weight 125,2 Kg Net weight 113,23 Kg

##### Notes

Portable version. Electric cable 3 m

#### 4067



##### Finishes

- 27/ \_ \_ Brown L1  
(NCS S 1505-Y50R)
- 53/ \_ \_ Green M1  
(NCS S 6005-G80Y)
- 61/ \_ \_ Ocre red  
(NCS S 3050-Y60R)

##### LED temperature colour

/1\_ 2700 K   
CRI >90 3481,09 lm 129 lm/W

##### Control

4067 \_ \_ / \_ 0  
On/ Off

##### Materials

Shade: Filament Winding. Base: Filament Winding.  
Diffuser: Methacrylate.

##### Light Source and electronics


1 x LED PLATE 25 W 700 mA  
1 x LED 2,4 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz


##### Packaging


3 Boxes  
Total Vol 1,5000 m<sup>3</sup>  
Gross weight 50 Kg Net weight 30,5 Kg

##### Notes

Portable version. Electric cable 3 m

|                                                                                                   |                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                          |
|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| <div>4072</div>  | <div>Finishes</div> <div><div><div></div>27/ _ _ Brown L1<br/>(NCS S 1505-Y50R)</div><div><div></div>53/ _ _ Green M1<br/>(NCS S 6005-G80Y)</div><div><div></div>61/ _ _ Ocre red<br/>(NCS S 3050-Y60R)</div></div>                                 | <div>LED temperature colour</div> <div>/1 _ 2700 K <br/>CRI &gt;90 3299,09 lm 132 lm/W</div>                                                                                                                                                                                                                                                                                                                                                                        | <div>Control</div> <div>4072 _ _ / _ 0<br/>On/ Off</div> |
|                                                                                                   | <div>Materials</div> <div>Shade: Filament winding. Canopy Plate: Steel.<br/>Lid: Steel. Diffuser: Methacrylate.</div> <div>Light Source and electronics</div> <div>1 x LED PLATE 25 W 700 mA<br/>Constant Current 700 mA<br/>110~240V 50/60Hz</div> | <div>Packaging</div> <div>1 Box 0,50 x 0,77 x 0,77 m<br/>Vol 0,2970 m³<br/>Gross weight 11,1 Kg Net weight 9,9 Kg</div> <div>Notes</div> <div>Surface mounted<br/>Extra cable length. 16,00 €/m</div> <div><div>LED</div><div></div><div>IP65</div><div></div><div>EAC</div><div></div></div> |                                                          |

|                                                                                                    |                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                          |
|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| <div>4077</div>  | <div>Finishes</div> <div><div><div></div>27/ _ _ Brown L1<br/>(NCS S 1505-Y50R)</div><div><div></div>53/ _ _ Green M1<br/>(NCS S 6005-G80Y)</div><div><div></div>61/ _ _ Ocre red<br/>(NCS S 3050-Y60R)</div></div>                                 | <div>LED temperature colour</div> <div>/1 _ 2700 K <br/>CRI &gt;90 3299,09 lm 132 lm/W</div>                                                                                                                                                                                                                                                                                                                                                                                                                           | <div>Control</div> <div>4077 _ _ / _ 0<br/>On/ Off</div> |
|                                                                                                    | <div>Materials</div> <div>Shade: Filament winding. Canopy Plate: Steel.<br/>Lid: Steel. Diffuser: Methacrylate.</div> <div>Light Source and electronics</div> <div>1 x LED PLATE 25 W 700 mA<br/>Constant Current 700 mA<br/>110~240V 50/60Hz</div> | <div>Packaging</div> <div>1 Box 0,67 x 0,67 x 0,62 m<br/>Vol 0,2970 m³<br/>Gross weight 11 Kg Net weight 9,9 Kg</div> <div>Notes</div> <div>Surface mounted<br/>Extra cable length. 16,00 €/m</div> <div><div>LED</div><div></div><div>IP65</div><div></div><div>EAC</div><div></div></div> <div><div>Dimmer</div><div>Bi-volt</div></div> |                                                          |

|                                                                                                     |                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                          |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| <div>4078</div>  | <div>Finishes</div> <div><div><div></div>27/ _ _ Brown L1<br/>(NCS S 1505-Y50R)</div><div><div></div>53/ _ _ Green M1<br/>(NCS S 6005-G80Y)</div><div><div></div>61/ _ _ Ocre red<br/>(NCS S 3050-Y60R)</div></div>                                 | <div>LED temperature colour</div> <div>/1 _ 2700 K <br/>CRI &gt;90 3299,09 lm 132 lm/W</div>                                                                                                                                                                                                                                                                                                                                                                                                                    | <div>Control</div> <div>4078 _ _ / _ 0<br/>On/ Off</div> |
|                                                                                                     | <div>Materials</div> <div>Shade: Filament winding. Canopy Plate: Steel.<br/>Lid: Steel. Diffuser: Methacrylate.</div> <div>Light Source and electronics</div> <div>3 x LED PLATE 25 W 700 mA<br/>Constant Current 700 mA<br/>110~240V 50/60Hz</div> | <div>Packaging</div> <div>1 Box 0,74 x 1,24 x 1,27 m<br/>Vol 1,1300 m³<br/>Gross weight 38 Kg Net weight 30 Kg</div> <div>Notes</div> <div>Indoor only<br/>Extra cable length. 16,00 €/m</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div></div> <div><div>Dimmer</div><div>Bi-volt</div></div> |                                                          |






# Break

Design by Xuclà & Alemany

Resembling an avant-garde sculpture, Break is distinguished by its architectural attitude. The cubic volumes angle provides down light, while doubling as sculptural outdoor presence.


## Outdoor

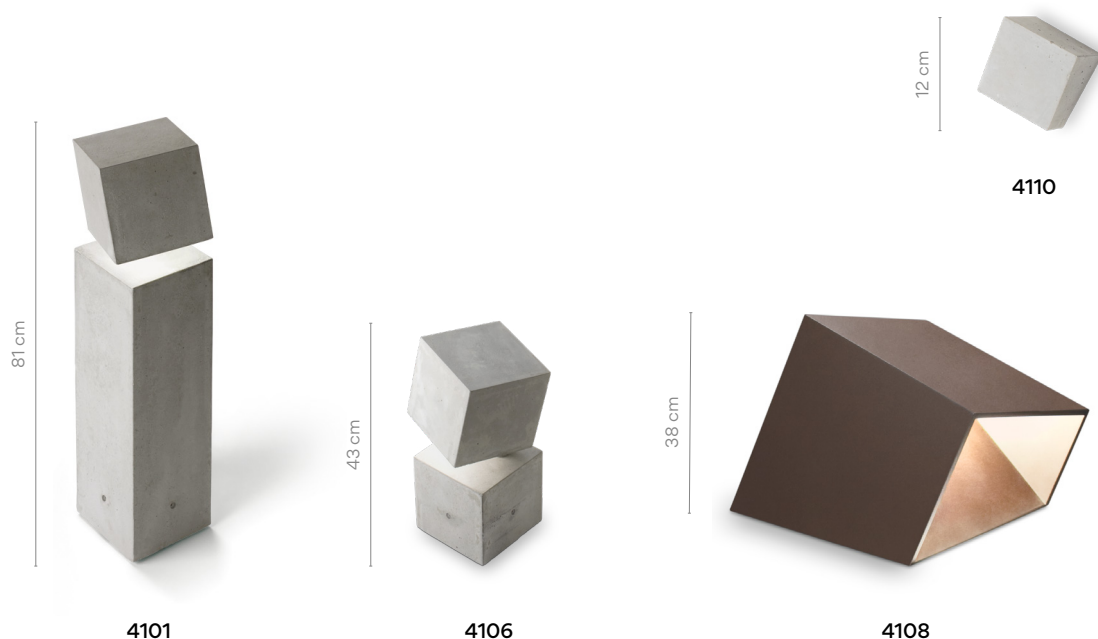


|             |  |                                                                                                                                                                                                                                |                                                                                                                     |                                             |
|-------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| <b>4101</b> |  | <b>Finishes</b><br>● 80/ _ _ Concrete (Natural finish)                                                                                                                                                                         | <b>LED temperature colour</b><br>/1_ 2700 K  CRI >80 710 lm 115 lm/W                                                | <b>Control</b><br>4101 _ _ / _ 0<br>On/ Off |
|             |  | <b>Materials</b><br>Head: Polyurethane / Concrete.<br>Base: Polyurethane / Concrete. Diffuser: Methacrylate.<br><br><b>Light Source and electronics</b><br>1 x LED 6,2 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz | <b>Packaging</b><br>1 Box 0,88 x 0,35 x 0,34 m<br>Vol 0,1032 m³<br>Gross weight 38,9 Kg Net weight 35,01 Kg<br><br> |                                             |

|             |  |                                                                                                                                                                                                                                |                                                                                                                     |                                             |
|-------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| <b>4106</b> |  | <b>Finishes</b><br>● 80/ _ _ Concrete (Natural finish)                                                                                                                                                                         | <b>LED temperature colour</b><br>/1_ 2700 K  CRI >80 710 lm 118 lm/W                                                | <b>Control</b><br>4106 _ _ / _ 0<br>On/ Off |
|             |  | <b>Materials</b><br>Head: Polyurethane / Concrete.<br>Base: Polyurethane / Concrete. Diffuser: Methacrylate.<br><br><b>Light Source and electronics</b><br>1 x LED 6,2 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz | <b>Packaging</b><br>1 Box 0,88 x 0,35 x 0,34 m<br>Vol 0,0598 m³<br>Gross weight 21,5 Kg Net weight 19,35 Kg<br><br> |                                             |



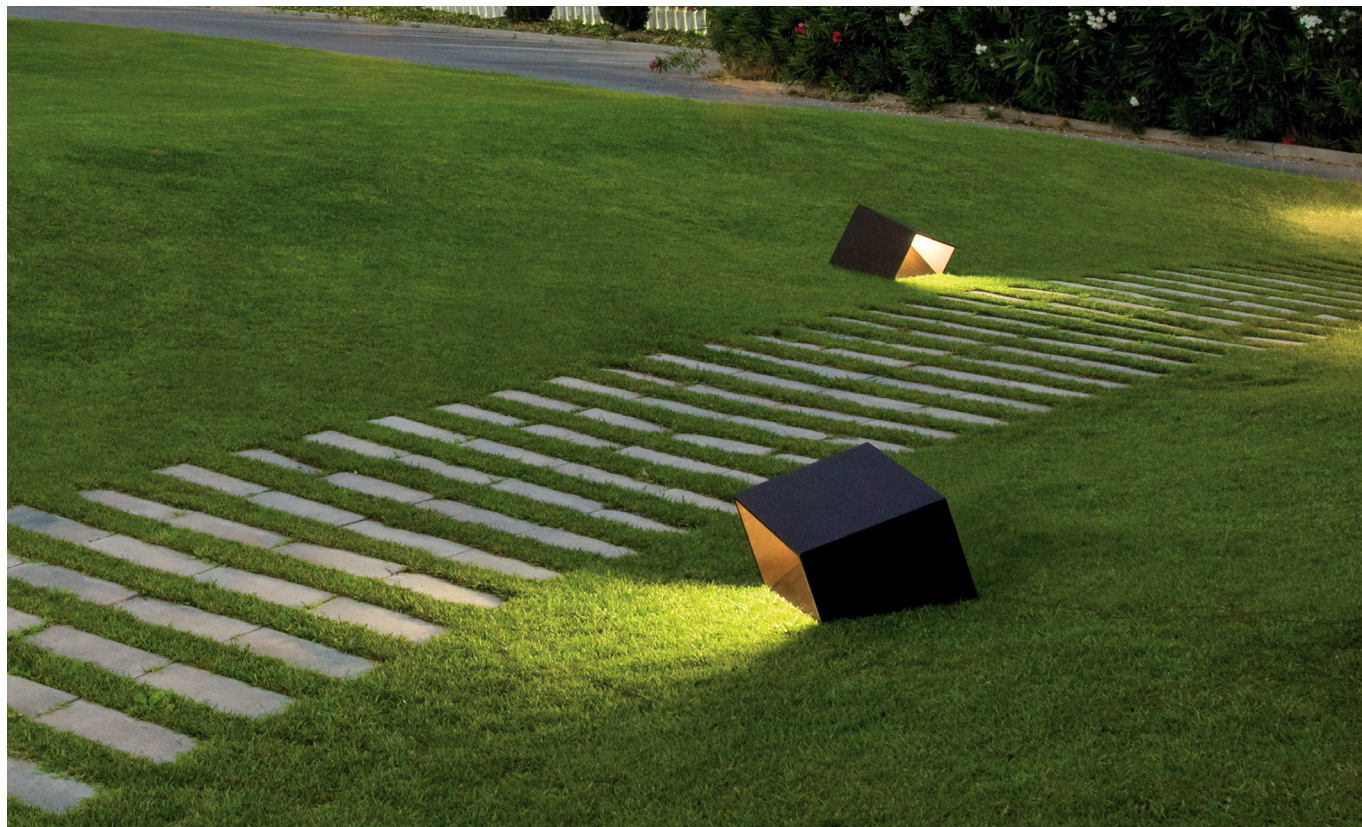

## 4108



**Finishes**  
 07/ \_ \_ Khaki  
 (RAL 7006)  
 54/ \_ \_ Oxide  
 (RAL 8014)

**LED colour temperature**  
 /1\_ 2700 K   
 CRI >80 2500 lm 118 lm/W

**Control**  
 4108 \_ \_ / \_ 0  
 On/ Off


**Materials**  
 Body: Steel.  
 Diffuser: Methacrylate.

**Light Source and electronics**  
 2 x LED Strip 9,2 W 400 mA  
 Constant Current 400 mA  
 220~240V 50/60Hz

**Packaging**  
 1 Box 0,49 x 0,51 x 0,52 m  
 Vol 0,1312 m³  
 Gross weight 6,6 Kg Net weight 16 Kg

LED  IP66  EAC 

## 4110



**Finishes**  
 80/ \_ \_ Concrete  
 (Natural finish)

**LED temperature colour**  
 /1\_ 2700 K   
 CRI >80 199 lm 95 lm/W

**Control**  
 4110 \_ \_ / \_ 0  
 On/ Off

**Materials**  
 Body: Aluminum / Concrete.  
 Diffuser: Methacrylate.

**Light Source and electronics**  
 1 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,260 x 0,260 x 0,260 m  
 Vol 1,0000 m³  
 Gross weight 2,30 Kg Net weight 2,07 Kg

LED  IP66  EAC  Bi-volt




# Break Plus

Design by Xuclà

An extension of the existing Break collection, defined by an instinctual connection to the landscape and surrounding architecture, Break Plus converts any wall into a three dimensional mural, casting diffuse, indirect light upwards, downwards or in both directions.


## Outdoor

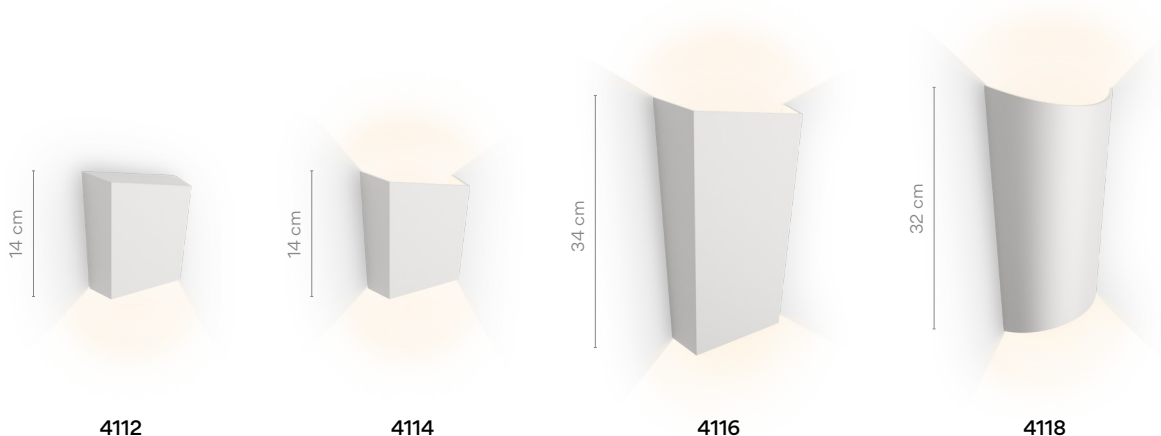

|      |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                       |
|------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4112 |  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>22/ _ _ Graphite Black (NCS S 8000-N)</li> <li>25/ _ _ Beige D1 (NCS S 4005-Y50R)</li> <li>37/ _ _ Terra Red (NCS S 4040-Y70R)</li> <li>95/ _ _ Primer (NCS S 1000-N)</li> </ul> <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K  CRI &gt;90 113,73 lm 113,73 lm/W</li> <li>/3 _ 3500 K  CRI &gt;90 146,22 lm 146,22 lm/W</li> </ul> <p><b>Materials</b></p> <p>Body: Aluminium.<br/>Diffuser: Polycarbonate.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED 1W 350 mA<br/>Constant Current 350 mA<br/>100~240Vac. 50/60Hz</p> | <p><b>Control</b></p> <p>4112 _ _ / _ 0<br/>On/ Off</p> <p>4112 _ _ / _ 1 _ 30<br/>DALI (Remote)</p> <p>4112 _ _ / _ Z _ 30<br/>Casambi ( Remote)</p> |
| 4114 |  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>22/ _ _ Graphite Black (NCS S 8000-N)</li> <li>25/ _ _ Beige D1 (NCS S 4005-Y50R)</li> <li>37/ _ _ Terra Red (NCS S 4040-Y70R)</li> <li>95/ _ _ Primer (NCS S 1000-N)</li> </ul> <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K  CRI &gt;90 227,46 lm 113,73 lm/W</li> <li>/3 _ 3500 K  CRI &gt;90 292,44 lm 146,22 lm/W</li> </ul> <p><b>Materials</b></p> <p>Body: Aluminium.<br/>Diffuser: Polycarbonate.</p> <p><b>Light Source and electronics</b></p> <p>2 x LED 1W 350 mA<br/>Constant Current 350 mA<br/>100~240Vac. 50/60Hz</p> | <p><b>Control</b></p> <p>4114 _ _ / _ 0<br/>On/ Off</p> <p>4114 _ _ / _ 1 _ 30<br/>DALI (Remote)</p> <p>4114 _ _ / _ Z _ 30<br/>Casambi ( Remote)</p> |
|      |  | <p><b>Packaging</b></p> <p>1 Box 0,07 x 0,19 x 0,23 m<br/>Vol 0,0030 m³<br/>Gross weight 1 Kg Net weight 0,590 Kg</p> <p> </p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <p><b>Packaging</b></p> <p>1 Box 0,07 x 0,19 x 0,23 m<br/>Vol 0,0030 m³<br/>Gross weight 1 Kg Net weight 0,590 Kg</p> <p> </p>                        |



#### 4116



| Finishes                                 | LED temperature colour                       |
|------------------------------------------|----------------------------------------------|
| ● 22/ _ Graphite Black<br>(NCS S 8000-N) | /1 _ 2700 K<br>CRI >90 707,52 lm 90,7 lm/W   |
| ● 25/ _ Beige D1<br>(NCS S 4005-Y50R)    | /3 _ 3500 K<br>CRI >90 925,22 lm 118,61 lm/W |
| ● 37/ _ Terra Red<br>(NCS S 4040-Y70R)   |                                              |
| ● 95/ _ Primer<br>(NCS S 1000-N)         |                                              |

| Control                                |
|----------------------------------------|
| 4116 _ _ / _ 0<br>On/ Off              |
| 4116 _ _ / 1 _ 30<br>DALI (Remote)     |
| 4116 _ _ / Z _ 30<br>Casambi ( Remote) |


**Materials**  
Body: Aluminium.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
2 x LED 4W 350 mA  
Constant Current 350 mA  
100~240Vac. 50/60Hz

**Packaging**  
1 Box 0,11 x 0,27 x 0,42 m  
Vol 0,0120 m<sup>3</sup>  
Gross weight 3,2 Kg Net weight 2,2 Kg



#### 4118



| Finishes                                 | LED temperature colour                       |
|------------------------------------------|----------------------------------------------|
| ● 22/ _ Graphite Black<br>(NCS S 8000-N) | /1 _ 2700 K<br>CRI >90 707,52 lm 90,7 lm/W   |
| ● 25/ _ Beige D1<br>(NCS S 4005-Y50R)    | /3 _ 3500 K<br>CRI >90 925,22 lm 118,61 lm/W |
| ● 37/ _ Terra Red<br>(NCS S 4040-Y70R)   |                                              |
| ● 95/ _ Primer<br>(NCS S 1000-N)         |                                              |

| Control                                |
|----------------------------------------|
| 4118 _ _ / _ 0<br>On/ Off              |
| 4118 _ _ / 1 _ 30<br>DALI (Remote)     |
| 4118 _ _ / Z _ 30<br>Casambi ( Remote) |

**Materials**  
Body: Aluminium.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
2 x LED 4W 350 mA  
Constant Current 350 mA  
100~240Vac. 50/60Hz

**Packaging**  
1 Box 0,11 x 0,27 x 0,42 m  
Vol 0,0120 m<sup>3</sup>  
Gross weight 3,2 Kg Net weight 1,71 Kg



# Empty


Design by Xuclà

A sculpture by day and lighting by night, this outdoor fixture embodies multifunctional design. Its crisp angles create a cantilevered perch that serves as a side table or stool.

## Outdoor



### 4125



| Finishes                                           | LED temperature colour                |
|----------------------------------------------------|---------------------------------------|
| ● 18/ __ Lacquered concrete grey (NCS S 2002-B50G) | /1_ 2700 K  CRI >80 664 lm 39 lm/W    |
|                                                    | /3_ 3500 K  CRI >90 1247 lm 72,5 lm/W |

Control  
4125 \_\_ / \_\_ 0  
On/ Off

#### Materials

Body: Polymer concrete.  
Diffuser: Methacrylate.

#### Light Source and electronics

2 x LED STRIP 24V 8,6 W  
Constant Voltage 24V  
100~277V 50/60Hz

#### Packaging


1 Box 0,56 x 0,50 x 0,50 m  
Vol 0,176 m³  
Gross weight 40 Kg Net weight 36 Kg

#### Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE EAC Bi-volt

### 4130



| Finishes                                           | LED temperature colour                |
|----------------------------------------------------|---------------------------------------|
| ● 18/ __ Lacquered concrete grey (NCS S 2002-B50G) | /1_ 2700 K  CRI >80 664 lm 39 lm/W    |
|                                                    | /3_ 3500 K  CRI >90 1247 lm 72,5 lm/W |

Control  
4130 \_\_ / \_\_ 0  
On/ Off

#### Materials

Body: Polymer concrete.  
Diffuser: Methacrylate.

#### Light Source and electronics

2 x LED STRIP 24V 8,6 W  
Constant Voltage 24V  
100~277V 50/60Hz

#### Packaging

1 Box 0,56 x 0,56 x 0,81 m  
Vol 0,254 m³  
Gross weight 54,7 Kg Net weight 49,7 Kg


#### Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE EAC Bi-volt



#### 4135



| Finishes                                            | LED temperature colour                |
|-----------------------------------------------------|---------------------------------------|
| ● 18/ _ _ Lacquered concrete grey (NCS S 2002-B50G) | /1 _ 2700 K  CRI >80 304 lm 35 lm/W   |
|                                                     | /3 _ 3500 K  CRI >90 1247 lm 145 lm/W |

Control  
4135 \_ \_ / \_ 0  
On/ Off

##### Materials

Body: Polymer concrete.  
Diffuser: Methacrylate.

##### Light Source and electronics

2 x LED STRIP 24V 4,3 W  
Constant Voltage 24V  
100~277V 50/60Hz

##### Packaging


1 Box 0,36 x 0,36 x 0,36 m  
Vol 0,04 m³  
Gross weight 12,2 Kg Net weight 10,4 Kg

##### Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE EAC Bi-volt

#### 4136



| Finishes                                            | LED temperature colour                |
|-----------------------------------------------------|---------------------------------------|
| ● 18/ _ _ Lacquered concrete grey (NCS S 2002-B50G) | /1 _ 2700 K  CRI >80 304 lm 35 lm/W   |
|                                                     | /3 _ 3500 K  CRI >90 1247 lm 145 lm/W |

Control  
4136 \_ \_ / \_ 0  
On/ Off

##### Materials

Body: Polymer concrete.  
Diffuser: Methacrylate.

##### Light Source and electronics

2 x LED STRIP 24V 4,3 W  
Constant Voltage 24V  
100~277V 50/60Hz

##### Packaging

1 Box 0,36 x 0,36 x 0,65 m  
Vol 0,084 m³  
Gross weight 22 Kg Net weight 19 Kg

##### Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE Dimmer Bi-volt




# Fold Surface


Design by Arik Levy

Fold features a geometric design that creates a striking three-dimensional illumination effect. Light and shadow are projected from its cubic shapes, washing the wall with glowing chevron patterns.

## Wall

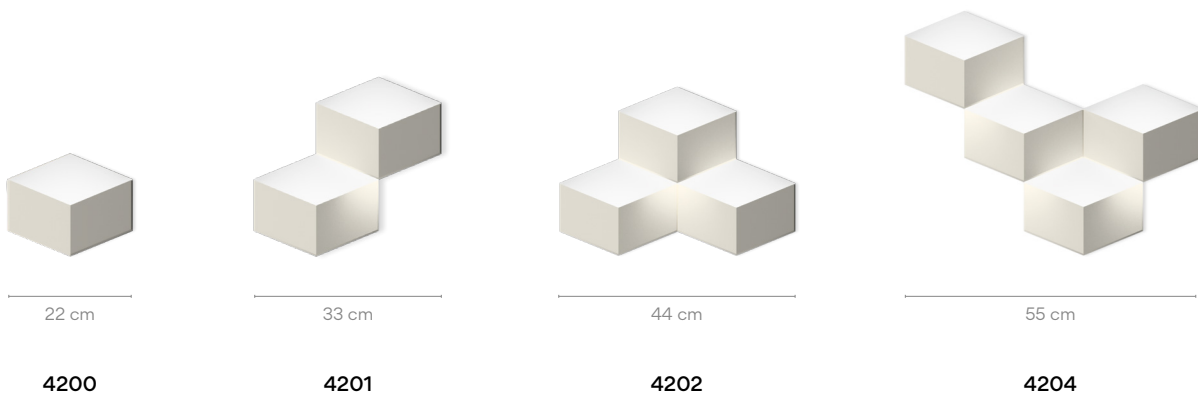

### 4200



#### Finishes

- **07/** \_\_ Green (PANTONE 385)
- **14/** \_\_ Chocolate (RAL 8019)
- **58/** \_\_ Off-white (RAL D2 1109005)

#### LED temperature colour

/1\_ 2700 K  CRI >90 362,4 lm 86 lm/W

#### Control

**4200** \_\_ / \_\_ 0  
On/ Off

#### Materials

Shade: Aluminum. Body: Aluminum.  
Diffuser: Polycarbonate.

#### Light Source and electronics


2 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

#### Packaging

1 Box 0,26 x 0,26 x 0,16 m  
Vol 0,0116 m<sup>3</sup>  
Gross weight 1,3 Kg Net weight 0,8 Kg

### 4201



#### Finishes

- **07/** \_\_ Green (PANTONE 385)
- **14/** \_\_ Chocolate (RAL 8019)
- **58/** \_\_ Off-white (RAL D2 1109005)

#### LED temperature colour

/1\_ 2700 K  CRI >90 724,9 lm 86 lm/W

#### Control

**4201** \_\_ / \_\_ 0  
On/ Off

#### Materials

Shade: Aluminum. Body: Aluminum.  
Diffuser: Polycarbonate.

#### Light Source and electronics

4 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz


#### Packaging

1 Box 0,41 x 0,41 x 0,21 m  
Vol 0,0353 m<sup>3</sup>  
Gross weight 2,8 Kg Net weight 1,6 Kg



## 4202



- Finishes**
- 07/ \_ \_ Green (PANTONE 385)
  - 14/ \_ \_ Chocolate (RAL 8019)
  - 58/ \_ \_ Off-white (RAL D2 1109005)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 1087,3 lm 86 lm/W

**Control**  
4202 \_ \_ / \_ 0  
On/ Off


**Materials**  
Shade: Aluminum. Body: Aluminum.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
6 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,17 x 0,51 x 0,51 m  
Vol 0,0429 m³  
Gross weight 4,2 Kg Net weight 2,4 Kg

LED IP20

## 4204



- Finishes**
- 07/ \_ \_ Green (PANTONE 385)
  - 14/ \_ \_ Chocolate (RAL 8019)
  - 58/ \_ \_ Off-white (RAL D2 1109005)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 1449,8 lm 86 lm/W

**Control**  
4204 \_ \_ / \_ 0  
On/ Off

**Materials**  
Shade: Aluminum. Body: Aluminum.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
8 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,27 x 0,60 x 0,60 m  
Vol 0,0972 m³  
Gross weight 5,7 Kg Net weight 3,2 Kg

LED IP20

# Out

Design by Víctor Carrasco


A romantic response to the global transition to life outside, Out brings the intimacy of indoor lighting outdoors. Suitable for illuminating a table or meeting point, this luminaire emanates with a soft, diffuse downlight, its source obscured by a translucent screen.

## Floor



4270

4275



### Finishes

- **22/** Graphite Black (NCS S 2005-Y50R)
- **23/** Warm White (NCS S 0502-Y50R)
- **25/** Beige D1 (NCS S 4005-Y50R)
- **36/** Soft Pink (NCS S 1010-Y50R)
- **37/** Terra Red (NCS S 4040-Y70R)
- **47/** Green L1 (NCS S 4005-G80Y)

### LED temperature colour

/1 2700 K   
CRI >90 1300 lm 104,83 lm/W

### Control

**4270** / 5  
Push  
**4270** / Z  
Casambi

### Materials

Tube: Stainless Steel. Shades: Aluminium.  
Diffuser: Polyethylene.

### Light Source and electronics

1 x LED 12,4W 700 mA  
Constant Voltage 24V 1.0A  
220~240V. 50/60Hz

### Packaging

5 Boxes  
Box 1: 0,17 x 0,39 x 0,51 m  
Box 2: 0,17 x 0,39 x 0,51 m  
Box 3: 0,60 x 0,60 x 0,27 m  
Box 4: 0,72 x 0,72 x 0,32 m  
Box 5: 2,40 x 2,10 x 0,1 m  
Total Vol 0,835 m<sup>3</sup>  
Gross weight 59 Kg Net weight 48 Kg

### Notes

Surface cable 4 m

LED  IP65  CE  EAC 





4275

#### Finishes


- 22/ \_ \_ Graphite Black  
(NCS S 2005-Y50R)
- 23/ \_ \_ Warm White  
(NCS S 0502-Y50R)
- 25/ \_ \_ Beige D1  
(NCS S 4005-Y50R)
- 36/ \_ \_ Soft Pink  
(NCS S 1010-Y50R)
- 37/ \_ \_ Terra Red  
(NCS S 4040-Y70R)
- 47/ \_ \_ Green L1  
(NCS S 4005-G80Y)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 1300 lm 104,83 lm/W

#### Control

4275 \_ \_ / \_ 1  
DALI  
4275 \_ \_ / \_ Z  
Casambi (Remote)



#### Materials

Tube: Stainless Steel. Shades: Aluminium.  
Diffuser: Polyethylene.

#### Light Source and electronics

1 x LED 12,4W 700 mA  
Constant Current 700 mA  
220~240V. 50/60Hz

#### Packaging

5 Boxes  
Box 1: 0,17 x 0,39 x 0,51 m  
Box 2: 0,17 x 0,39 x 0,51 m  
Box 3: 0,60 x 0,60 x 0,27 m  
Box 4: 0,72 x 0,72 x 0,32 m  
Box 5: 2,40 x 2,10 x 0,1 m  
Total Vol 0,835 m³  
Gross weight 59 Kg Net weight 48 Kg

#### Notes

Bolt-down "hard wired"

LED  IP65  CE  EAC  



# Up

Design by Ramos & Bassols


Inspired by the look of neoclassical cornices, Up blends seamlessly into the ceiling. With its flat LED diffusion system and refined rim, it gives the appearance of uniform light passing from an opening in the ceiling through a sleek frame.

## Ceiling



|                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>4440</b></p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>18/</b> _ _ Graphite (RAL 7016)</li> <li>● <b>93/</b> _ _ White (RAL 9016)</li> </ul> <p><b>Finish customization</b><br/>(Available options:<br/>Vibia colour palette)</p> <p><b>Materials</b><br/>Diffuser: Polycarbonate. Body: Aluminum.<br/>Ceiling support: Steel.</p> <p><b>Light Source and electronics</b><br/>1 x LED PLATE 26,5 W 700 mA<br/>Constant Current 700 mA<br/>110-240V 50/60Hz</p> | <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K </li> <li>CRI &gt;90 2207 lm 98 lm/W</li> <li>/4 _ 4000 K </li> <li>CRI &gt;90 2982 lm 132,5 lm/W</li> </ul> <p><b>Control</b></p> <p><b>4440</b> _ _ / _ A<br/>DALI-2, 1-10V, Push</p> <p><b>4440</b> _ _ / _ Z<br/>Casambi</p> <p><b>Packaging</b><br/>1 Box 0,17 x 0,55 x 0,55 m<br/>Vol 0,0514 m³<br/>Gross weight 11 Kg Net weight 7,5 Kg</p> <p> </p> |
| <p><b>4442</b></p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>18/</b> _ _ Graphite (RAL 7016)</li> <li>● <b>93/</b> _ _ White (RAL 9016)</li> </ul> <p><b>Finish customization</b><br/>(Available options:<br/>Vibia colour palette)</p> <p><b>Materials</b><br/>Diffuser: Polycarbonate. Body: Aluminum.<br/>Ceiling support: Steel.</p> <p><b>Light Source and electronics</b><br/>1 x LED PLATE 55,3 W 700 mA<br/>Constant Current 700 mA<br/>110-240V 50/60Hz</p> | <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"> <li>/1 _ 2700 K </li> <li>CRI &gt;90 3959 lm 100 lm/W</li> <li>/4 _ 4000 K </li> <li>CRI &gt;90 6159 lm 155,8 lm/W</li> </ul> <p><b>Control</b></p> <p><b>4442</b> _ _ / _ A<br/>DALI-2, 1-10V, Push</p> <p><b>4442</b> _ _ / _ Z<br/>Casambi</p> <p><b>Packaging</b><br/>1 Box 0,17 x 0,90 x 0,90 m<br/>Vol 0,1377 m³<br/>Gross weight 13 Kg Net weight 15 Kg</p> <p> </p> |

## 4452



| Finishes                      | LED temperature colour                 |
|-------------------------------|----------------------------------------|
| ● 18/ _ _ Graphite (RAL 7016) | /1 _ 2700 K  CRI >90 3957 lm 79 lm/W   |
| ● 93/ _ _ White (RAL 9016)    | /4 _ 4000 K  CRI >90 4754 lm 95,1 lm/W |

Finish customization  
(Available options:  
Vibia colour palette)

| Control                               |
|---------------------------------------|
| 4452 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 4452 _ _ / _ Z<br>Casambi             |


**Materials**  
Diffuser: Polycarbonate. Body: Aluminum.  
Ceiling support: Steel.

**Light Source and electronics**  
1 x LED PLATE 50 W 900 mA  
Constant Current 900 mA  
110~240V 50/60Hz

**Packaging**  
1 Box 0,17 x 0,42 x 1,31 m  
Vol 0,0924 m<sup>3</sup>  
Gross weight 14 Kg Net weight 12 Kg

LED IP20

## 4454



| Finishes                      | LED temperature colour                 |
|-------------------------------|----------------------------------------|
| ● 18/ _ _ Graphite (RAL 7016) | /1 _ 2700 K  CRI >90 3957 lm 79 lm/W   |
| ● 93/ _ _ White (RAL 9016)    | /4 _ 4000 K  CRI >90 4754 lm 95,1 lm/W |

Finish customization  
(Available options:  
Vibia colour palette)

| Control                               |
|---------------------------------------|
| 4454 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 4454 _ _ / _ Z<br>Casambi             |


**Materials**  
Diffuser: Polycarbonate. Body: Aluminum.  
Ceiling support: Steel.

**Light Source and electronics**  
1 x LED PLATE 50 W 900 mA  
Constant Current 900 mA  
110~240V 50/60Hz

**Packaging**  
1 Box 0,17 x 0,73 x 0,73 m  
Vol 0,0905 m<sup>3</sup>  
Gross weight 14 Kg Net weight 13 Kg

LED IP20

## 4460



| Finishes                      | LED temperature colour                  |
|-------------------------------|-----------------------------------------|
| ● 18/ _ _ Graphite (RAL 7016) | /1 _ 2700 K  CRI >90 4140,22 lm 66 lm/W |
| ● 93/ _ _ White (RAL 9016)    | /4 _ 4000 K  CRI >90 9141 lm 145,1 lm/W |

Finish customization  
(Available options:  
Vibia colour palette)

| Control                               |
|---------------------------------------|
| 4460 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 4460 _ _ / _ Z<br>Casambi             |

**Materials**  
Diffuser: Polycarbonate. Body: Aluminum.  
Ceiling support: Steel.

**Light Source and electronics**  
1 x LED PLATE 26,5 W 700 mA  
1 x LED PLATE 55,3W 750 mA  
Constant Current 700 / 750 mA  
110~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,1891 m<sup>3</sup>  
Gross weight 24 Kg Net weight 23 Kg

**Notes**  
Only one electric connection point

LED IP20

# Origami

Design by Ramón Esteve


Recalling the folded paper of the Japanese art form for which it's named, Origami generates a stunning play of light and shadows. Composed of two architectural modules that be arranged in countless personalized designs, it creates the effect of climbing ivy along a blank expanse of wall.

---

## Wall Outdoor

**4500**

30 cm



**4501**

30 cm




**4504**

53 cm



**4506**

73 cm

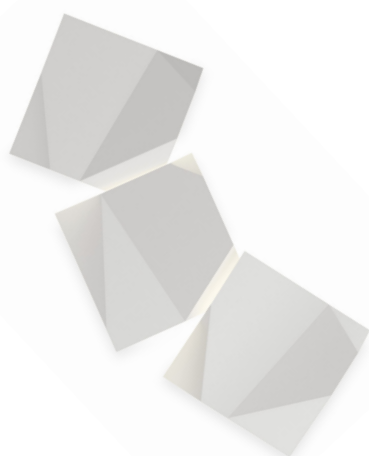


**4508**

94 cm




Each project is unique.  
 Visit [vibia.com](http://vibia.com) and  
 chose among multiple  
 compositions designed  
 and adapted to your  
 project needs.

Personalise your own  
 Origami composition  
 quick and easy at  
[vibia.com](http://vibia.com)

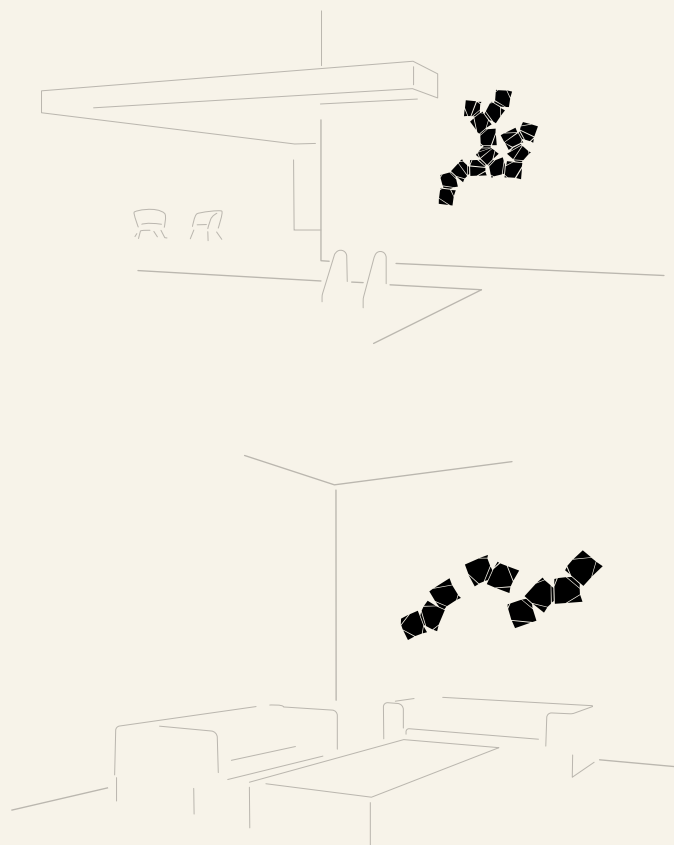

## 4500



### Finishes

- 10/ \_ \_ White  
(NCS S 0300-N)
- 29/ \_ \_ Brown D1  
(NCS S 8005-Y50R)
- 38/ \_ \_ Terra Dark  
(NCS S 5040-Y70R)
- 53/ \_ \_ Green M1  
(NCS S 6005-G80Y)

### LED temperature colour

- /1\_ 2700 K **D**  
CRI >90 756,42 lm 120 lm/W
- /3\_ 3500 K **E**  
CRI >90 799,1 lm 126,8 lm/W

### Control

4500 \_ \_ / \_ 4  
 TRIAC

### Materials

Shade: ABS. Diffuser: Polycarbonate.  
 Lid: Polycarbonate. Arm: Polycarbonate.

### Light Source and electronics

1 x LED STRIP 6,3 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz


### Packaging


1 Box 0,35 x 0,35 x 0,12 m  
 Vol 0,0150 m³  
 Gross weight 1,5 Kg Net weight 1 Kg


### Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system




|                                                                                   |                                                                                                                                  |                                                                                                      |                               |                                                                                                                                |  |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--|
|  | <b>4501</b>                                                                                                                      |                                                                                                      |                               |                                                                                                                                |  |
|                                                                                   |                                                                                                                                  | <b>Finishes</b>                                                                                      | <b>LED temperature colour</b> | <b>Control</b>                                                                                                                 |  |
|                                                                                   |  <b>10/ _ _ White</b><br>(NCS S 0300-N)         | <b>/1 _ 2700 K</b>  | <b>4501 _ _ / _ 4</b>         |                                                                                                                                |  |
|                                                                                   |  <b>29/ _ _ Brown D1</b><br>(NCS S 8005-Y50R)   | <b>CRI &gt;90 756,42 lm 120 lm/W</b>                                                                 | <b>TRIAC</b>                  |                                                                                                                                |  |
|                                                                                   |  <b>38/ _ _ Terra Dark</b><br>(NCS S 5040-Y70R) | <b>/3 _ 3500 K</b>  |                               |                                                                                                                                |  |
|                                                                                   |  <b>53/ _ _ Green M1</b><br>(NCS S 6005-G80Y)   | <b>CRI &gt;90 799,1 lm 126,8 lm/W</b>                                                                |                               |                                                                                                                                |  |
|                                                                                   |                                                                                                                                  |                                                                                                      |                               |                                                                                                                                |  |
|                                                                                   |                                                                                                                                  | <b>Materials</b>                                                                                     |                               | <b>Packaging</b>                                                                                                               |  |
|                                                                                   |                                                                                                                                  | <b>Shade:</b> ABS. <b>Diffuser:</b> Polycarbonate.                                                   |                               | <b>1 Box</b> 0,35 x 0,35 x 0,12 m                                                                                              |  |
|                                                                                   |                                                                                                                                  | <b>Lid:</b> Polycarbonate. <b>Arm:</b> Polycarbonate.                                                |                               | <b>Vol</b> 0,0150 m <sup>3</sup>                                                                                               |  |
|                                                                                   |                                                                                                                                  |                                                                                                      |                               | <b>Gross weight</b> 1,5 Kg <b>Net weight</b> 1 Kg                                                                              |  |
|                                                                                   |                                                                                                                                  | <b>Light Source and electronics</b>                                                                  |                               | <b>Notes</b>                                                                                                                   |  |
|                                                                                   |                                                                                                                                  | <b>1 x LED STRIP</b> 6,3 W 350 mA                                                                    |                               | <b>A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system</b> |  |
|                                                                                   |                                                                                                                                  | <b>Constant Current</b> 350 mA                                                                       |                               |                                                                                                                                |  |
|                                                                                   |                                                                                                                                  | <b>220~240V 50/60Hz</b>                                                                              |                               |                                                                                                                                |  |

|                                                                                     |                                                                                                                                    |                                                                                                                                        |                                |                                                                                                                          |  |  |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------|--|--|
|  | <b>4504</b>                                                                                                                        |                                                                                                                                        |                                |                                                                                                                          |  |  |
|                                                                                     |                                                                                                                                    | <b>Finishes</b>                                                                                                                        | <b>LED temperature colour</b>  | <b>Control</b>                                                                                                           |  |  |
|                                                                                     |  <b>10/ _ _ White</b><br>(NCS S 0300-N)          | <b>/1 _ 2700 K </b><br>CRI >90 1512,84 lm 120 lm/W   | <b>4504 _ _ / _ 4</b><br>TRIAC |                                                                                                                          |  |  |
|                                                                                     |  <b>29/ _ _ Brown D1</b><br>(NCS S 8005-Y50R)   | <b>/3 _ 3500 K </b><br>CRI >90 1598,2 lm 126,8 lm/W |                                |                                                                                                                          |  |  |
|                                                                                     |  <b>38/ _ _ Terra Dark</b><br>(NCS S 5040-Y70R) |                                                                                                                                        |                                |                                                                                                                          |  |  |
|                                                                                     |  <b>53/ _ _ Green M1</b><br>(NCS S 6005-G80Y)   |                                                                                                                                        |                                |                                                                                                                          |  |  |
|                                                                                     |                                                                                                                                    |                                                                                                                                        |                                |                                                                                                                          |  |  |
|                                                                                     | <b>Materials</b>                                                                                                                   |                                                                                                                                        |                                | <b>Packaging</b>                                                                                                         |  |  |
|                                                                                     | Shade: ABS. Diffuser: Polycarbonate.                                                                                               |                                                                                                                                        |                                | 1 Box 0,64 x 0,40 x 0,22 m                                                                                               |  |  |
|                                                                                     | Lid: Polycarbonate. Arm: Polycarbonate.                                                                                            |                                                                                                                                        |                                | Vol 0,0563 m <sup>3</sup>                                                                                                |  |  |
|                                                                                     | <b>Light Source and electronics</b>                                                                                                |                                                                                                                                        |                                | Gross weight 4,05 Kg Net weight 2,15 Kg                                                                                  |  |  |
|                                                                                     | 2 x LED STRIP 6,3 W 350 mA                                                                                                         |                                                                                                                                        |                                |                                                                                                                          |  |  |
|                                                                                     | Constant Current 350 mA                                                                                                            |                                                                                                                                        |                                |                                                                                                                          |  |  |
|                                                                                     | 220~240V 50/60Hz                                                                                                                   |                                                                                                                                        |                                | <b>Notes</b>                                                                                                             |  |  |
|                                                                                     |                                                                                                                                    |                                                                                                                                        |                                | A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system. |  |  |

|                                                                                                                         |                                                                                                                                    |                                                                                                                                        |                                |                |
|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------|
|                                      | <b>4506</b>                                                                                                                        | <b>Finishes</b>                                                                                                                        | <b>LED temperature colour</b>  | <b>Control</b> |
|                                                                                                                         |  <b>10/ _ _ White</b><br>(NCS S 0300-N)         | <b>/1 _ 2700 K </b><br>CRI >90 2269,26 lm 120 lm/W  | <b>4506 _ _ / _ 4</b><br>TRIAC |                |
|                                                                                                                         |  <b>29/ _ _ Brown D1</b><br>(NCS S 8005-Y50R)   | <b>/3 _ 3500 K </b><br>CRI >90 2397,2 lm 126,8 lm/W |                                |                |
|                                                                                                                         |  <b>38/ _ _ Terra Dark</b><br>(NCS S 5040-Y70R) |                                                                                                                                        |                                |                |
|                                                                                                                         |  <b>53/ _ _ Green M1</b><br>(NCS S 6005-G80Y)   |                                                                                                                                        |                                |                |
| <b>Materials</b>                                                                                                        |                                                                                                                                    |                                                                                                                                        |                                |                |
| Shade: ABS. Diffuser: Polycarbonate.<br>Lid: Polycarbonate. Arm: Polycarbonate.                                         |                                                                                                                                    |                                                                                                                                        |                                |                |
| <b>Light Source and electronics</b>                                                                                     |                                                                                                                                    |                                                                                                                                        |                                |                |
| 3 x LED STRIP 6,3 W 350 mA<br>Constant Current 350 mA<br>220~240V 50/60Hz                                               |                                                                                                                                    |                                                                                                                                        |                                |                |
| <b>Packaging</b>                                                                                                        |                                                                                                                                    |                                                                                                                                        |                                |                |
| 1 Box 0,95 x 0,40 x 0,22 m<br>Vol 0,0836 m <sup>3</sup><br>Gross weight 5,33 Kg Net weight 3,23 Kg                      |                                                                                                                                    |                                                                                                                                        |                                |                |
| <b>Notes</b>                                                                                                            |                                                                                                                                    |                                                                                                                                        |                                |                |
| A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system |                                                                                                                                    |                                                                                                                                        |                                |                |



## 4508



### Finishes

- 10/ \_ \_ White  
(NCS S 0300-N)
- 29/ \_ \_ Brown D1  
(NCS S 8005-Y50R)
- 38/ \_ \_ Terra Dark  
(NCS S 5040-Y70R)
- 53/ \_ \_ Green M1  
(NCS S 6005-G80Y)

### LED temperature colour

- /1 \_ 2700 K CRI >90 3025,68 lm 120 lm/W
- /3 \_ 3500 K CRI >90 3196,3 lm 126,8 lm/W

### Control

4508 \_ \_ / \_ 4  
TRIAC

### Materials

Shade: ABS. Diffuser: Polycarbonate.  
Lid: Polycarbonate. Arm: Polycarbonate.

### Light Source and electronics


4 x LED STRIP 6,3 W 350 mA  
Constant Current 350 mA  
220-240V 50/60Hz

### Packaging

1 Box 1,25 x 0,40 x 0,22 m  
Vol 0,1100 m<sup>3</sup>  
Gross weight 7,2 Kg Net weight 6,48 Kg

### Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system






# Palo Alto

Design by Xuclà

At once natural and architectural, Palo Alto creates the effect of illuminated landscaping. Its angular, tree-shaped silhouette integrates seamlessly with the outdoors whether displayed individually or in a group.

## Outdoor

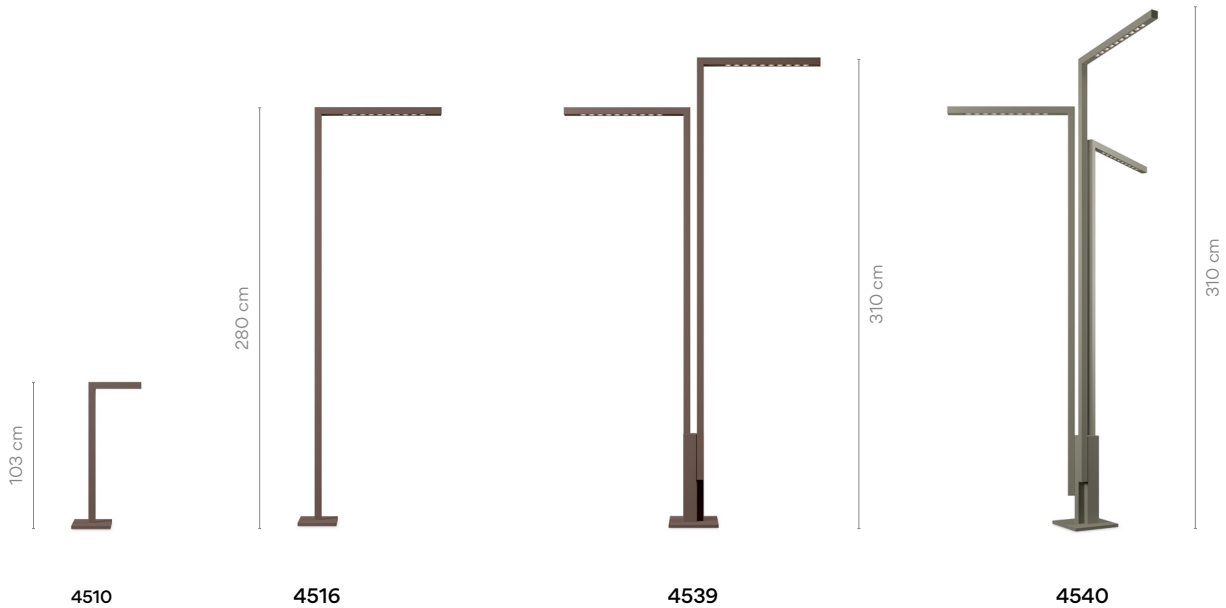

### 4510



| Finishes                            | LED temperature colour                    |
|-------------------------------------|-------------------------------------------|
| ● 29/ _ _ Brown D1<br>(S 8005-Y50R) | /1 _ 2700 K<br>CRI >90 179,64 lm 41 lm/W  |
| ● 53/ _ _ Green M1<br>(S 6005-G80Y) | /3 _ 3500 K<br>CRI >90 179,6 lm 40,8 lm/W |

**Materials**  
Body: Steel.  
Cover: Steel.

**Light Source and electronics**  
2 x LED 2,2 W 700 mA  
Constant Current 700 mA  
220~240V 50/60Hz

**Control**  
4510 \_ \_ / \_ 0  
On/ Off

**Packaging**  
1 Box 0,44 x 0,40 x 1,10 m  
Vol 0,2080 m<sup>3</sup>  
Gross weight 11,1 Kg Net weight 10 Kg

LED IP65 EAC Bi-volt

### 4516



| Finishes                            | LED temperature colour                     |
|-------------------------------------|--------------------------------------------|
| ● 29/ _ _ Brown D1<br>(S 8005-Y50R) | /1 _ 2700 K<br>CRI >90 1044,95 lm 70 lm/W  |
| ● 53/ _ _ Green M1<br>(S 6005-G80Y) | /3 _ 3500 K<br>CRI >90 1045,0 lm 69,7 lm/W |

**Materials**  
Body: Steel.  
Cover: Steel.


**Light Source and electronics**  
1 x LED MODULE 24V 15 W  
Constant Voltage 24V  
100~240V 50/60Hz

**Control**  
4516 \_ \_ / \_ 0  
On/ Off

**Packaging**  
1 Box 0,32 x 0,32 x 2,64 m  
Vol 0,2703 m<sup>3</sup>  
Gross weight 18,4 Kg Net weight 16,5 Kg

LED IP65 EAC Multi-volt

## 4539



- Finishes**
- 29/ \_ \_ Brown D1 (S 8005-Y50R)
  - 53/ \_ \_ Green M1 (S 6005-G80Y)

- LED temperature colour**
- /1 \_ 2700 K CRI >90 2089,9 lm 70 lm/W
  - /3 \_ 3500 K CRI >90 2089,9 lm 69,7 lm/W

**Control**

4539 \_ \_ / \_ 0  
On/ Off

### Materials

Body: Steel.  
Cover: Steel.

### Light Source and electronics


2 x LED MODULE 24V 15 W  
Constant Voltage 24V  
100~240V 50/60Hz

### Packaging

1 Box 0,37 x 0,37 x 2,61 m  
Vol 0,3570 m³  
Gross weight 46,4 Kg Net weight 41,76 Kg

Multi-volt

## 4540

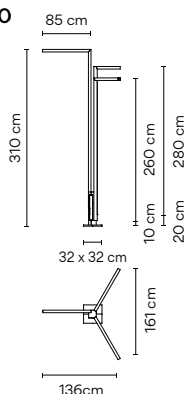

- Finishes**
- 29/ \_ \_ Brown D1 (S 8005-Y50R)
  - 53/ \_ \_ Green M1 (S 6005-G80Y)

- LED temperature colour**
- /1 \_ 2700 K CRI >90 3134,85 lm 70 lm/W
  - /3 \_ 3500 K CRI >90 3134,9 lm 69,7 lm/W

**Control**

4540 \_ \_ / \_ 0  
On/ Off

### Materials

Body: Steel.  
Cover: Steel.

### Light Source and electronics

3 x LED MODULE 24V 15 W  
Constant Voltage 24V  
100~240V 50/60Hz

### Packaging

1 Box 0,40 x 0,44 x 2,64 m  
Vol 0,4646 m³  
Gross weight 55,4 Kg Net weight 49,86 Kg

Multi-volt



# Brisa


Design by Lievore, Altherr, Molina

Inspired by the forest blue bell flower, Brisa adds a nature-inspired accent to any outdoor space. Its long, slender stem is topped with a pendant, conical shade and features adjustable, revolving arms.

## Outdoor



### 4625



#### Finishes

- 07/ \_\_ Khaki (RAL 7039)
- 54/ \_\_ Oxide (RAL 8014)

#### LED temperature colour

- /1\_ 2700 K CRI >90 181,22 lm 86 lm/W
- /3\_ 3500 K CRI >90 193,9 lm 92,3 lm/W

#### Control

**4625** \_\_ / \_\_ 0  
On/ Off

#### Materials

Shade and Base: Aluminum. Disc: Stainless steel.  
Vertical tube: Steel.

#### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz


#### Packaging

1 Box 0,16 x 0,16 x 1,6 m  
Vol 0,0409 m³  
Gross weight 1,8 Kg Net weight 1,3 Kg

#### Notes

Spike. Surface

## 4630



| Finishes                      | LED temperature colour                            |
|-------------------------------|---------------------------------------------------|
| ● 07/ _ _ Khaki<br>(RAL 7039) | /1_ 2700 K <b>G</b><br>CRI >90 543,66 lm 86 lm/W  |
| ● 54/ _ _ Oxide<br>(RAL 8014) | /3_ 3500 K <b>F</b><br>CRI >90 581,7 lm 92,3 lm/W |

Control  
**4630** \_ / \_ 0  
On/ Off

### Materials

Shade and Base: Aluminum. Disc: Stainless steel.  
Vertical tube: Steel.

### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

### Packaging


1 Box 0,16 x 0,16 x 1,6 m  
Vol 0,0409 m³  
Gross weight 2,6 Kg Net weight 2 Kg

### Notes

Built-in

LED IP65   
Bi-volt ø 13 cm

## 4635



| Finishes                      | LED temperature colour                            |
|-------------------------------|---------------------------------------------------|
| ● 07/ _ _ Khaki<br>(RAL 7039) | /1_ 2700 K <b>G</b><br>CRI >90 906,1 lm 86 lm/W   |
| ● 54/ _ _ Oxide<br>(RAL 8014) | /3_ 3500 K <b>F</b><br>CRI >90 969,5 lm 92,3 lm/W |

Control  
**4635** \_ / \_ 0  
On/ Off

### Materials

Shade and Base: Aluminum. Disc: Stainless steel.  
Vertical tube: Steel.

### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

### Packaging


1 Box 0,32 x 0,36 x 1,16 m  
Vol 0,1336 m³  
Gross weight 6,5 Kg Net weight 5,85 Kg

### Notes

Built-in

LED IP65   
Bi-volt ø 17 cm

## 4640



| Finishes                      | LED temperature colour                             |
|-------------------------------|----------------------------------------------------|
| ● 07/ _ _ Khaki<br>(RAL 7039) | /1_ 2700 K <b>G</b><br>CRI >90 1268,54 lm 86 lm/W  |
| ● 54/ _ _ Oxide<br>(RAL 8014) | /3_ 3500 K <b>F</b><br>CRI >90 1357,3 lm 92,3 lm/W |

Control  
**4640** \_ / \_ 0  
On/ Off

### Materials

Shade and Base: Aluminum. Disc: Stainless steel.  
Vertical tube: Steel.

### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

### Packaging

1 Box 0,32 x 0,36 x 1,16 m  
Vol 0,1336 m³  
Gross weight 6 Kg Net weight 4 Kg

### Notes

Built-in

LED IP65   
Bi-volt ø 22,5 cm


# Dots

Design by Martín Azúa

A diminutive wall sconce delivers outsized impact in the form of simple, circular dots. Seamlessly connecting a space with an intimate landscape of beams and halos, the collection creates a melody of light like a composition of musical notes in concert with another.

---


## Wall

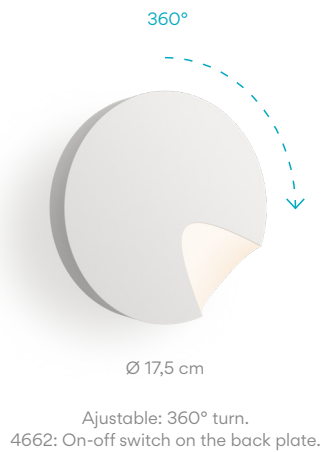


**4660 - 4662**



**4665**

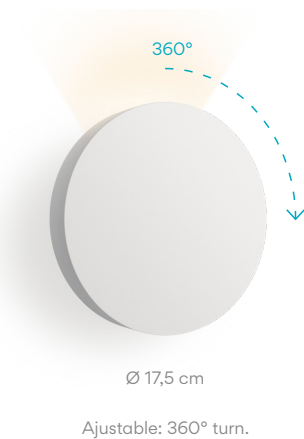


**4670**

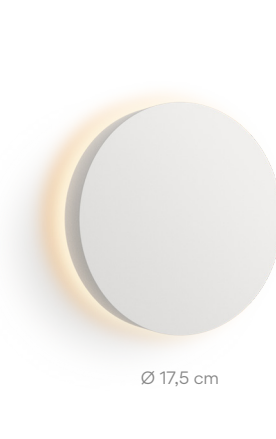

**4675**

## 4660



- Finishes**
- 13/ \_ \_ Off-White (NCS S 1000-N)
  - 27/ \_ \_ Brown L1 (NCS S 1505-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 482,65 lm 84 lm/W

**Control**  
4660 \_ \_ / \_ 0  
On/ Off

4660 \_ \_ / \_ 1  
DALI-2

4660 \_ \_ / \_ 3  
1-10V

4660 \_ \_ / \_ 4  
TRIAC

- Finishes**
- 82/ \_ \_ White oak
  - 83/ \_ \_ American walnut

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 482,65 lm 84 lm/W

**Control**  
4660 \_ \_ / \_ 0  
On/ Off

4660 \_ \_ / \_ 1  
DALI-2

4660 \_ \_ / \_ 3  
1-10V

4660 \_ \_ / \_ 4  
TRIAC

### Materials

Body: ABS or Natural wood. Diffuser: Polycarbonate.  
Canopy: Aluminum.

### Light Source and electronics


1 x LED 5,75 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz

### Packaging


1 Box 0,13 x 0,22 x 0,21 m  
Vol 0,0062 m<sup>3</sup>  
**ABS:** Gross weight 0,65 Kg  
Net weight 0,4 Kg  
**Natural wood:** Gross weight 0,85 Kg  
Net weight 0,6 Kg

### Notes

22° light halo



## 4662



- Finishes**
- 13/ \_ \_ Off-White (NCS S 1000-N)
  - 27/ \_ \_ Brown L1 (NCS S 1505-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 482,65 lm 84 lm/W

**Control**  
4662 \_ \_ / \_ 0  
On/ Off

4662 \_ \_ / \_ 4  
TRIAC

- Finishes**
- 82/ \_ \_ White oak
  - 83/ \_ \_ American walnut

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 482,65 lm 84 lm/W

**Control**  
4662 \_ \_ / \_ 0  
On/ Off

4662 \_ \_ / \_ 4  
TRIAC

### Materials

Body: ABS or Natural wood. Diffuser: Polycarbonate.  
Canopy: Aluminum.

### Light Source and electronics


1 x LED 5,75 W 500 mA  
Constant Current 500 mA  
220~240V 50/60Hz



### Packaging

1 Box 0,13 x 0,22 x 0,21 m  
Vol 0,0062 m<sup>3</sup>  
**ABS:** Gross weight 0,65 Kg  
Net weight 0,4 Kg  
**Natural wood:** Gross weight 0,85 Kg  
Net weight 0,6 Kg

### Notes


22° light halo  
Switch on the back plate



|      |                                                                                    |                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                      |                                             |
|------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| 4665 |   | <b>Finishes</b><br><div><div></div>13/ _ _ Off-White<br/>(NCS S 1000-N)</div> <div><div></div>27/ _ _ Brown L1<br/>(NCS S 1505-Y50R)</div> <div><div></div>37/ _ _ Terra Red<br/>(NCS S 4040-Y70R)</div> <div><div></div>47/ _ _ Green L1<br/>(NCS S 4005-G80Y)</div> | <b>LED temperature colour</b><br>/1_ 2700 K <br>CRI >90 482,65 lm 84 lm/W                                                                                                                                                                                           | <b>Control</b><br>4665 _ _ / _ 0<br>On/ Off |
|      |                                                                                    | <b>Materials</b><br>Body: ABS. Diffuser: Polycarbonate.<br>Canopy: Aluminum.                                                                                                                                                                                          | <b>Packaging</b><br>1 Box 0,13 x 0,22 x 0,21 m<br>Vol 0,0062 m³<br>Gross weight 0,65 Kg Net weight 0,4 Kg                                                                                                                                                                                                                                            |                                             |
|      |                                                                                    | <b>Light Source and electronics</b><br>1 x LED 5,75 W 500 mA<br>Constant Current 500 mA<br>220~240V 50/60Hz                                                                                                                                                           |             |                                             |
| 4670 |  | <b>Finishes</b><br><div><div></div>13/ _ _ Off-White<br/>(NCS S 1000-N)</div> <div><div></div>27/ _ _ Brown L1<br/>(NCS S 1505-Y50R)</div> <div><div></div>37/ _ _ Terra Red<br/>(NCS S 4040-Y70R)</div> <div><div></div>47/ _ _ Green L1<br/>(NCS S 4005-G80Y)</div> | <b>LED temperature colour</b><br>/1_ 2700 K <br>CRI >90 482,65 lm 84 lm/W                                                                                                                                                                                           | <b>Control</b><br>4670 _ _ / _ 0<br>On/ Off |
|      |                                                                                    | <b>Materials</b><br>Body: ABS or Natural wood. Diffuser: Polycarbonate.<br>Canopy: Aluminum.                                                                                                                                                                          | <b>Packaging</b><br>1 Box 0,13 x 0,22 x 0,21 m<br>Vol 0,0062 m³<br><b>ABS:</b> Gross weight 0,65 Kg<br>Net weight 0,4 Kg<br><b>Natural wood:</b> Gross weight 0,85 Kg<br>Net weight 0,6 Kg                                                                                                                                                           |                                             |
|      |                                                                                    | <b>Light Source and electronics</b><br>1 x LED 5,75 W 500 mA<br>Constant Current 500 mA<br>220~240V 50/60Hz                                                                                                                                                           |     |                                             |



4675



- Finishes**
- 13/ \_ \_ Off-White (NCS S 1000-N)
  - 27/ \_ \_ Brown L1 (NCS S 1505-Y50R)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 47/ \_ \_ Green L1 (NCS S 4005-G80Y)

**LED temperature colour**

/1 \_ 2700 K   
 CRI >90 573,83 lm 128 lm/W

**Control**

4675 \_ / \_ 0   
 On/ Off

4675 \_ / \_ 1   
 DALI-2

4675 \_ / \_ 3   
 1-10V

4675 \_ / \_ 4   
 TRIAC

- Finishes**
- 82/ \_ \_ White oak
  - 83/ \_ \_ American walnut

**LED temperature colour**

/1 \_ 2700 K   
 CRI >90 482,65 lm 84 lm/W

**Control**

4675 \_ / \_ 0   
 On/ Off

4675 \_ / \_ 1   
 DALI-2

4675 \_ / \_ 3   
 1-10V

4675 \_ / \_ 4   
 TRIAC

**Materials**

Body: ABS or Natural wood. Diffuser: Polycarbonate.   
 Canopy: Aluminum.

**Light Source and electronics**

1 x LED PLATE 4,5 W 500 mA   
 Constant Current 500 mA   
 100~240V 50/60Hz

**Packaging**

1 Box 0,13 x 0,22 x 0,21 m   
 Vol 0,0062 m<sup>3</sup>

**ABS:** Gross weight 0,65 Kg

Net weight 0,4 Kg

**Natural wood:** Gross weight 0,85 Kg

Net weight 0,6 Kg




# Dots Outdoor

Design by Martín Azúa


Easily mistaken for a stone during the day, this fixture is designed to nestle into the undergrowth of a garden or amongst the potted plants of a patio. Dots Outdoor shines at night with a low, diffuse and indirect glow, the source of which is invisible from almost any angle.

## Outdoor



ø 20 cm

4695



ø 16 cm

4697



ø 20 cm

4700



ø 16 cm

4702

4695

### Finishes

- 22/ \_ \_ Graphite Black (NCS S 8000-N)
- 25/ \_ \_ Beige D1 (NCS S 4005-Y50R)
- 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

### LED temperature colour

/1 \_ 2700 K   
CRI >90 750,2 lm 96,18 lm/W

### Control

4695 \_ \_ / \_ 0  
On/ Off

4695 \_ \_ / \_ 1 \_ 30  
DALI ( Remote)

4695 \_ \_ / \_ Z \_ 30  
Casambi ( Remote)

### Materials

Body: Aluminium.  
Diffuser: Polycarbonate.


### Light Source and electronics

1 x LED STRIP 7,8W 350 mA  
Constant Current 350 mA  
100~277V 50/60Hz


### Packaging

1 Box 0,30 x 0,27 x 0,18 m  
Vol 0,0146 m<sup>3</sup>  
Gross weight 3,4 Kg Net weight 2,7 Kg

     Multi-volt



4697



| Finishes                                   | LED temperature colour      |
|--------------------------------------------|-----------------------------|
| ● 22/ _ _ Graphite Black<br>(NCS S 8000-N) | /1 _ 2700 K <b>G</b>        |
| ● 25/ _ _ Beige D1<br>(NCS S 4005-Y50R)    | CRI >90 375,9 lm 81,72 lm/W |
| ● 53/ _ _ Green M1<br>(NCS S 6005-G80Y)    |                             |

| Control                                |
|----------------------------------------|
| 4697 _ _ / _ 0<br>On/ Off              |
| 4697 _ _ / _ 1 30<br>DALI ( Remote)    |
| 4697 _ _ / _ Z 30<br>Casambi ( Remote) |


**Materials**  
Body: Aluminium.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
1 x LED STRP 4,6W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,24 x 0,20 x 0,13 m  
Vol 0,0624 m³  
Gross weight 1,9 Kg Net weight 1,5 Kg

LED IP65

4700



| Finishes                                   | LED temperature colour     |
|--------------------------------------------|----------------------------|
| ● 22/ _ _ Graphite Black<br>(NCS S 8000-N) | /1 _ 2700 K <b>F</b>       |
| ● 25/ _ _ Beige D1<br>(NCS S 4005-Y50R)    | CRI >90 1445 lm 97,64 lm/W |
| ● 53/ _ _ Green M1<br>(NCS S 6005-G80Y)    |                            |

| Control                                |
|----------------------------------------|
| 4700 _ _ / _ 0<br>On/ Off              |
| 4700 _ _ / _ 1 30<br>DALI ( Remote)    |
| 4700 _ _ / _ Z 30<br>Casambi ( Remote) |


**Materials**  
Body: Aluminium.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
1 x LED STRIP 14,8W 350 mA  
Constant Current 350 mA  
100~277V 50/60Hz

**Packaging**  
1 Box 0,30 x 0,27 x 0,18 m  
Vol 0,0146 m³  
Gross weight 3,8 Kg Net weight 3,1 Kg

LED IP65

4702



| Finishes                                   | LED temperature colour     |
|--------------------------------------------|----------------------------|
| ● 22/ _ _ Graphite Black<br>(NCS S 8000-N) | /1 _ 2700 K <b>F</b>       |
| ● 25/ _ _ Beige D1<br>(NCS S 4005-Y50R)    | CRI >90 1294 lm 101,1 lm/W |
| ● 53/ _ _ Green M1<br>(NCS S 6005-G80Y)    |                            |

| Control                                |
|----------------------------------------|
| 4702 _ _ / _ 0<br>On/ Off              |
| 4702 _ _ / _ 1 30<br>DALI ( Remote)    |
| 4702 _ _ / _ Z 30<br>Casambi ( Remote) |

**Materials**  
Body: Aluminium.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
1 x LED STRIP 12,8W 300 mA  
Constant Current 300 mA  
100~277V 50/60Hz

**Packaging**  
1 Box 0,24 x 0,20 x 0,13 m  
Vol 0,0146 m³  
Gross weight 1,9 Kg Net weight 1,5 Kg

LED IP65

# Meridiano


Design by Jordi Vilardell & Meritxell Vidal

Meridiano features a grid of steel slots through which LED light radiates outwards in a dramatic sunburst pattern. Topped with foam, it doubles as a seat or side table, its airy architecture integrating easily into outdoor spaces.

## Outdoor



### 4710



| Finishes                                            | LED temperature colour                           |
|-----------------------------------------------------|--------------------------------------------------|
| ● <b>07/</b> __ Khaki<br>(RAL 7006)                 | <b>/1</b> _ 2700 K<br>CRI >90 1269 lm 141 lm/W   |
| ● <b>58/</b> __ Off-white<br>(PANTONE WARM GRAY 2U) | <b>/3</b> _ 3500 K<br>CRI >80 1709 lm 189,9 lm/W |

Control  
**4710** \_\_ / \_ 0  
On/ Off


**Materials**  
Seat: Polyurethane foam. Rods: Steel.  
Arm: Steel. Diffuser: Glass.

**Light Source and electronics**  
1 x LED 9 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,57 x 0,66 x 0,66 m  
Vol 0,2483 m<sup>3</sup>  
Gross weight 18,2 Kg Net weight 15,6 Kg

**Notes**  
It can be connected with or without a plug

### 4715



| Finishes                                            | LED temperature colour                           |
|-----------------------------------------------------|--------------------------------------------------|
| ● <b>07/</b> __ Khaki<br>(RAL 7006)                 | <b>/1</b> _ 2700 K<br>CRI >90 1269 lm 141 lm/W   |
| ● <b>58/</b> __ Off-white<br>(PANTONE WARM GRAY 2U) | <b>/3</b> _ 3500 K<br>CRI >80 1709 lm 189,9 lm/W |

Control  
**4715** \_\_ / \_ 0  
On/ Off

**Materials**  
Seat: Polyurethane foam. Rods: Steel.  
Arm: Steel. Diffuser: Glass.

**Light Source and electronics**  
1 x LED 9 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz


**Packaging**  
1 Box 0,43 x 0,94 x 0,94 m  
Vol 0,38 m<sup>3</sup>  
Gross weight 20,1 Kg Net weight 16,7 Kg

**Notes**  
It can be connected with or without a plug





4720



**Finishes**  
 07/ \_ \_ Khaki  
 (RAL 7006)  
 58/ \_ \_ Off-white  
 (PANTONE  
 WARM GRAY 2U)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 1269 lm 141 lm/W  
 /3 \_ 3500 K   
 CRI >80 1709 lm 189,9 lm/W

**Control**  
 4720 \_ \_ / \_ 0  
 On/ Off

**Materials**  
 Base: Steel.

**Light Source and electronics**  
 1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,106 x 0,310 x 0,310 m  
 Vol 0,102 m<sup>3</sup>  
 Gross weight 1,5 Kg Net weight 1 Kg

LED IP65 Bi-volt

# June

Design by Ana Mir + Emili Padrós (emiliana design studio)


Inspired by traditional lanterns, June recall garlands festooned throughout an outdoor space. Its moon-like spheres cast a warm, ambient glow.

## Outdoor



ø 130 cm

4730



ø 200 cm

4735



ø 130 cm


4745



ø 200 cm

4750

### 4730



#### Finishes

- 54/ \_ \_ Brown (Pantone Black U)

#### LED temperature colour

/1\_ 2700 K  CRI >90 286,4 lm 95 lm/W

#### Control

4730\_ / \_ 0  
On/ Off

#### Materials

Diffuser: PVC + UV.  
Tubes: Steel.

#### Light Source and electronics


3 x LED 1 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### Packaging

1 Box 1,5 x 0,4 x 0,4 m  
Vol 0,24 m<sup>3</sup>  
Gross weight 5 Kg Net weight 3 Kg

LED  IP65  EAC  Bi-volt

### 4735



#### Finishes

- 54/ \_ \_ Brown (Pantone Black U)

#### LED temperature colour

/1\_ 2700 K  CRI >90 477,3 lm 95 lm/W

#### Control

4735\_ / \_ 0  
On/ Off

#### Materials

Diffuser: PVC + UV.  
Tubes: Steel.

#### Light Source and electronics

5 x LED 1 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### Packaging

1 Box 2,3 x 0,4 x 0,4 m  
Vol 0,368 m<sup>3</sup>  
Gross weight 7 Kg Net weight 5 Kg

LED  IP65  EAC  Bi-volt






#### 4745

Finishes  
 ● 54/ \_ \_ Brown  
 (Pantone Black U)

LED temperature colour  
 /1\_ 2700 K   
 CRI >90 286,4 lm 95 lm/W

Control  
 4745 \_ \_ / \_ 0  
 On/ Off



#### Materials

Diffuser: Opal blown glass.  
 Tubes: Steel.

#### Light Source and electronics

3 x LED 1 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

#### Packaging

1 Box 1,5 x 0,4 x 0,4 m  
 Vol 0,24 m<sup>3</sup>  
 Gross weight 5,5 Kg Net weight 3,5 Kg


    

#### 4750

Finishes  
 ● 54/ \_ \_ Brown  
 (Pantone Black U)

LED temperature colour  
 /1\_ 2700 K   
 CRI >90 477,3 lm 95 lm/W

Control  
 4750 \_ \_ / \_ 0  
 On/ Off



#### Materials

Diffuser: Opal blown glass.  
 Tubes: Steel.

#### Light Source and electronics

5 x LED 1 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

#### Packaging


1 Box 2,3 x 0,4 x 0,4 m  
 Vol 0,24 m<sup>3</sup>  
 Gross weight 7 Kg Net weight 5 Kg




Outdoor



|                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                          |                                                         |                                                                                                                                                             |                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| 4765                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       | <b>Finishes</b><br>● 54/ _ _ Brown<br>(Pantone Black U) | <b>LED temperature colour</b><br>/1_ 2700 K <br>CRI >90 477,3 lm 95 lm/W | <b>Control</b><br>4765 _ _ / _ 0<br>On/ Off |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Materials</b><br>Diffuser: Opal blown glass.<br>Tubes: Steel.                                         |                                                         | <b>Packaging</b><br>1 Box 0,8 x 0,4 x 0,4 m<br>Vol 0,128 m³<br>Gross weight 3 Kg Net weight 2 Kg                                                            |                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Light Source and electronics</b><br>1 x LED 1 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz |                                                         | <b>Notes</b><br>Electric cable 9 m                                                                                                                          |                                             |
| <div>    </div> |                                                                                                          |                                                         |                                                                                                                                                             |                                             |

4770



**Finishes**  
 ● 54/ \_ \_ Brown  
 (Pantone Black U)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 95,5 lm 95 lm/W

**Control**  
 4770 \_ \_ / \_ 0  
 On/ Off

**Materials**  
 Diffuser: Opal blown glass.  
 Tubes: Steel.


**Light Source and electronics**  
 1 x LED 1 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 1 x 0,4 x 0,4 m  
 Vol 0,016 m³  
 Gross weight 5 Kg Net weight 3 Kg

**Notes**  
 Electric cable 3 m

LED IP65

4775



**Finishes**  
 ● 54/ \_ \_ Brown  
 (Pantone Black U)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 190,9 lm 95 lm/W

**Control**  
 4775 \_ \_ / \_ 0  
 On/ Off

**Materials**  
 Diffuser: Opal blown glass.  
 Tubes: Steel.


**Light Source and electronics**  
 2 x LED 1 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 1,5 x 0,4 x 0,4 m  
 Vol 0,24 m³  
 Gross weight 6 Kg Net weight 4 Kg

**Notes**  
 Electric cable 3 m

LED IP65

4780



**Finishes**  
 ● 54/ \_ \_ Brown  
 (Pantone Black U)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 95,5 lm 95 lm/W

**Control**  
 4780 \_ \_ / \_ 0  
 On/ Off

**Materials**  
 Diffuser: Opal blown glass.  
 Tubes: Steel.


**Light Source and electronics**  
 1 x LED 1 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 1 x 0,4 x 0,4 m  
 Vol 0,16 m³  
 Gross weight 5 Kg Net weight 3 Kg

**Notes**  
 Electric cable 4 m

LED IP65

4785



**Finishes**  
 ● 54/ \_ \_ Brown  
 (Pantone Black U)

**LED temperature colour**  
 /1 \_ 2700 K   
 CRI >90 190,9 lm 95 lm/W

**Control**  
 4785 \_ \_ / \_ 0  
 On/ Off


**Materials**  
 Diffuser: Opal blown glass.  
 Tubes: Steel.


**Light Source and electronics**  
 2 x LED 1 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 1,5 x 0,4 x 0,4 m  
 Vol 0,24 m³  
 Gross weight 6 Kg Net weight 4 Kg

**Notes**  
 Electric cable 4 m.

LED IP65

|                                                                                   |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                             |  |                        |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------|
| 4790                                                                              | Finishes                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                  | LED temperature colour                                                                                                                                                                                                                                                                                      |  | Control                |
|                                                                                   | ● 54/ _ _ Brown<br>(Pantone Black U)                              |                                                                                                                                                                                                                                                                                                                                                                                                                                  | /1 _ 2700 K <br>CRI >90 95,5 lm 95 lm/W                                                                                                                                                                                    |  | 4790 _ _ / _ 5<br>Push |
|  | Materials                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                  | Packaging                                                                                                                                                                                                                                                                                                   |  |                        |
|                                                                                   | Diffuser: Opal blown glass.<br>Tubes: Steel.                      |                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1 Box 0,3 x 0,3 x 0,3 m<br>Vol 0,027 m³<br>Gross weight 2 Kg Net weight 1 Kg                                                                                                                                                                                                                                |  |                        |
|                                                                                   | Light Source and electronics                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                  | Notes                                                                                                                                                                                                                                                                                                       |  |                        |
|                                                                                   | 1 x LED 1 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz |                                                                                                                                                                                                                                                                                                                                                                                                                                  | Dimmer switch on the base.<br>3-step dimming.<br>Charge by removable cable.<br>Battery life: from 6 to 18 hours<br>(depending on intensity).<br>Product with IP20. Should not be used<br>outdoors in rain or very humid environments,<br>with water condensation. After use, it should<br>be stored inside. |  |                        |
|                                                                                   |                                                                   |      |                                                                                                                                                                                                                                                                                                             |  |                        |

|                                                                                     |                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                        |  |                        |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------|
| 4795                                                                                | Finishes                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                            | LED temperature colour                                                                                                                                                                                                                                                                                                 |  | Control                |
|                                                                                     | ● 54/ _ _ Brown<br>(Pantone Black U)                              |                                                                                                                                                                                                                                                                                                                                                                                                                                            | /1 _ 2700 K <br>CRI >90 286,4 lm 95 lm/W                                                                                                                                                                                             |  | 4795 _ _ / _ 5<br>Push |
|  | Materials                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                            | Packaging                                                                                                                                                                                                                                                                                                              |  |                        |
|                                                                                     | Diffuser: Opal blown glass.<br>Tubes: Steel.                      |                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1 Box 0,5 x 0,5 x 0,3 m<br>Vol 0,075 m³<br>Gross weight 4,90 Kg Net weight 3,60 Kg                                                                                                                                                                                                                                     |  |                        |
|                                                                                     | Light Source and electronics                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                            | Notes                                                                                                                                                                                                                                                                                                                  |  |                        |
|                                                                                     | 3 x LED 1 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz |                                                                                                                                                                                                                                                                                                                                                                                                                                            | Dimmer switch on the base.<br>3-step dimming.<br>Tray with 3 units. Charge by contact.<br>Battery life: from 6 to 18 hours<br>(depending on intensity).<br>Product with IP20. Should not be used<br>outdoors in rain or very humid environments,<br>with water condensation. After use, it should<br>be stored inside. |  |                        |
|                                                                                     |                                                                   |      |                                                                                                                                                                                                                                                                                                                        |  |                        |






# Bamboo

Design by Antoni Arola & Enric Rodríguez

Bamboo's lean, natural form perfectly lends itself to an outdoor setting. Studded with LEDs, it seamlessly integrates with the landscape while adding a wash of light to walkways and common spaces.

## Outdoor

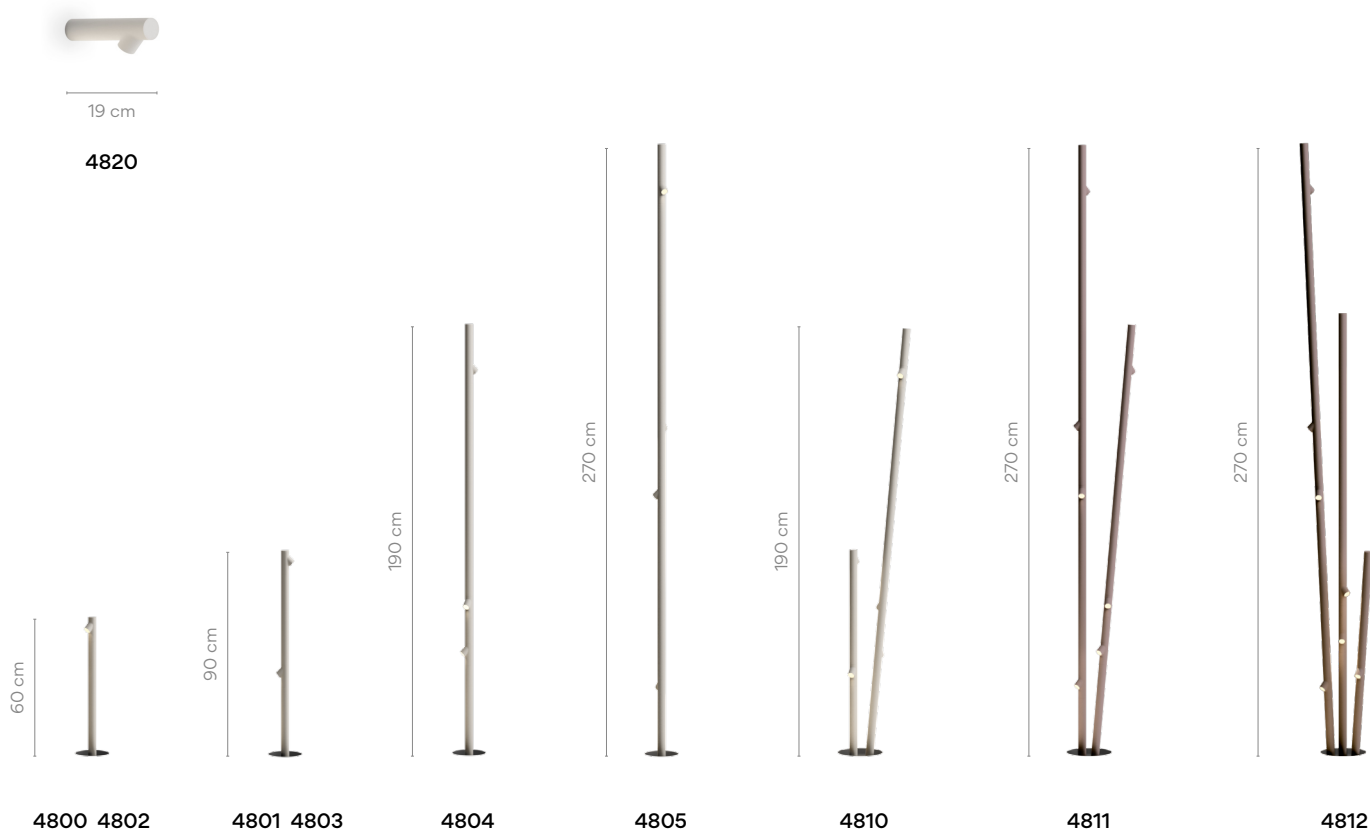

### 4800



**Finishes**

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

**LED temperature colour**

- /1\_ 2700 K CRI >90 181,2 lm 86 lm/W
- /3\_ 3500 K CRI >90 181,2 lm 86,3 lm/W

**Control**

4800 \_ \_ / \_ 0

On/ Off

**Materials**

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

**Light Source and electronics**

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**


1 Box 0,125 x 0,125 x 1,3 m  
Vol 0,0203 m³  
Gross weight 4 Kg Net weight 3,6 Kg

**Notes**

Surface



## 4801



**Finishes**

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

**LED temperature colour**

/1 \_ 2700 K CRI >90 362,4 lm 86 lm/W

/3 \_ 3500 K CRI >90 362,4 lm 86,3 lm/W

**Control**

4801 \_ \_ / \_ 0

On/ Off

**Materials**

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

**Light Source and electronics**

2 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,0470 m<sup>3</sup>  
Gross weight 8,5 Kg Net weight 6 Kg

**Notes**

Surface

LED IP66 CE EAC Bi-volt

## 4802



**Finishes**

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

**LED temperature colour**

/1 \_ 2700 K CRI >90 181,2 lm 86 lm/W

/3 \_ 3500 K CRI >90 181,2 lm 86,3 lm/W

**Control**

4802 \_ \_ / \_ 0

On/ Off

**Materials**

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

**Light Source and electronics**

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,0480 m<sup>3</sup>  
Gross weight 7 Kg Net weight 5,5 Kg

**Notes**

Built-in

LED IP66 CE EAC Bi-volt

## 4803



**Finishes**

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

**LED temperature colour**

/1 \_ 2700 K CRI >90 362,4 lm 86 lm/W

/3 \_ 3500 K CRI >90 362,4 lm 86,3 lm/W

**Control**

4803 \_ \_ / \_ 0

On/ Off

**Materials**

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

**Light Source and electronics**

2 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,0470 m<sup>3</sup>  
Gross weight 8,5 Kg Net weight 5,8 Kg


**Notes**

Built-in

LED IP66 CE EAC Bi-volt



4804



Finishes

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

- /1 \_ 2700 K  CRI >90 543,7 lm 86 lm/W
- /3 \_ 3500 K  CRI >90 543,7 lm 86,3 lm/W

Control

4804 \_ \_ / \_ 0

On/ Off

Materials

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

Light Source and electronics

3 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging


2 Boxes  
Total Vol 0,0480 m³  
Gross weight 8 Kg Net weight 6,5 Kg

Notes

Built-in

4805



Finishes

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

- /1 \_ 2700 K  CRI >90 724,9 lm 86 lm/W
- /3 \_ 3500 K  CRI >90 724,9 lm 86,3 lm/W

Control

4805 \_ \_ / \_ 0

On/ Off

Materials

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

Light Source and electronics

4 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging


2 Boxes  
Total Vol 0,0600 m³  
Gross weight 9 Kg Net weight 7 Kg

Notes

Built-in

4810



Finishes

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

- /1 \_ 2700 K  CRI >90 906,1 lm 86 lm/W
- /3 \_ 3500 K  CRI >90 906,1 lm 86,3 lm/W

Control

4810 \_ \_ / \_ 0

On/ Off

Materials

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

Light Source and electronics

5 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging


3 Boxes  
Total Vol 0,1388 m³  
Gross weight 15 Kg Net weight 12,5 Kg

Notes

Built-in

4811



Finishes

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

LED temperature colour

- /1 \_ 2700 K  CRI >90 1268,5 lm 86 lm/W
- /3 \_ 3500 K  CRI >90 1268,5 lm 86,3 lm/W

Control

4811 \_ \_ / \_ 0

On/ Off

Materials

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

Light Source and electronics

7 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging


3 Boxes  
Total Vol 1,660 m³  
Gross weight 16,5 Kg Net weight 13 Kg

Notes

Built-in

## 4812

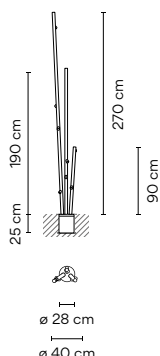

**Finishes**

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

**LED temperature colour**

- /1 \_ 2700 K CRI >90 1631,0 lm 86 lm/W
- /3 \_ 3500 K CRI >90 1631,0 lm 86,3 lm/W

**Control**

4812 \_ \_ / \_ 0

On/ Off

### Materials

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

### Light Source and electronics

9 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz


### Packaging

4 Boxes  
Total Vol 0,1854 m<sup>3</sup>  
Gross weight 21,6 Kg Net weight 19,44 Kg

### Notes

Built-in

## 4815



**Finishes**

- 18 Polymer concrete (NCS S 2002-B50G)

### Materials

Base: Polymer concrete.

### 4815 18


### Packaging

1 Box 0,40 x 0,50 x 0,50 m  
Vol 0,1000 m<sup>3</sup>  
Gross weight 39 Kg Net weight 35 Kg

### Notes

Surface installation accessory.  
For ref. 4810. 4811. 4812

## 4820



**Finishes**

- 07/ \_ \_ Khaki (RAL 7006)
- 54/ \_ \_ Oxide (RAL 8017)
- 58/ \_ \_ Off-white (PANTONE WARM GRAY 2U)

**LED temperature colour**

- /1 \_ 2700 K CRI >90 181,2 lm 86 lm/W
- /3 \_ 3500 K CRI >90 181,2 lm 86,3 lm/W

**Control**

4820 \_ \_ / \_ 0

On/ Off

### Materials

Cane: Resin + fiberglass.  
Diffuser: Methacrylate.

### Light Source and electronics

1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

### Packaging

1 Box 0,25 x 0,10 x 0,10 m  
Vol 0,0025 m<sup>3</sup>  
Gross weight 2 Kg Net weight 1 Kg

### Notes

Surface

# Duo

Design by Ramos & Bassols

Natural warmth. Simple volumes with a sculptural quality, easily integrated with the architecture of the ceilings where they are fitted allowing the lights to become focal points without being suspended.

## Ceiling

**4870**

ø 47,5 cm



**4872**

ø 78,5 cm



**4874**

ø 35 cm



**4878**

ø 70 cm



**4876**

ø 35 cm




**4880**

ø 70 cm



**4870**



### Finishes

- **18/** \_ \_ Graphite  
(Adapta RF9913WX)
- **58/** \_ \_ Cream  
(RAL 7044)
- **93/** \_ \_ White  
(RAL 9016)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1 \_ 2700 K
- CRI >90 2207,0 lm 98 lm/W
- /4 \_ 4000 K
- CRI >90 2364,6 lm 105,1 lm/W

### Control

- 4870** \_ \_ / \_ A  
DALI-2, 1-10V, Push
- 4870** \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Main Body: Aluminum.  
Inner structure: Oak wood.

### Light Source and electronics


1 x LED PLATE 26,5 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

### Packaging

1 Box 0,56 x 0,56 x 0,26 m  
Vol 0,0815 m³  
Gross weight 7 Kg Net weight 6 Kg



## 4872



| Finishes                                                             | LED temperature colour                    |
|----------------------------------------------------------------------|-------------------------------------------|
| 18/ _ _ Graphite<br>(Adapta RF9913WX)                                | /1 _ 2700 K  CRI >90 3959,0 lm 100 lm/W   |
| 58/ _ _ Cream<br>(RAL 7044)                                          | /4 _ 4000 K  CRI >90 4241,8 lm 107,3 lm/W |
| 93/ _ _ White<br>(RAL 9016)                                          |                                           |
| Finish customization<br>(Available options:<br>Vibia colour palette) |                                           |

| Control                               |
|---------------------------------------|
| 4872 _ _ / _ A<br>DALI-2, 1-10V, Push |
| 4872 _ _ / _ Z<br>Casambi             |

### Materials

Diffuser: Polycarbonate. Main Body: Aluminum.  
Inner structure: Oak wood.

### Light Source and electronics


1 x LED PLATE 50 W 700 mA  
Constant Current 750 mA  
110~240V 50/60Hz

### Packaging

1 Box 0,9 x 0,9 x 0,25 m  
Vol 0,2025 m<sup>3</sup>  
Gross weight 19 Kg Net weight 17 Kg



## 4874



| Finishes                                                             | LED temperature colour                  |
|----------------------------------------------------------------------|-----------------------------------------|
| 18/ _ _ Graphite<br>(Adapta RF9913WX)                                | /1 _ 2700 K  CRI >90 644,7 lm 54 lm/W   |
| 58/ _ _ Cream<br>(RAL 7044)                                          | /4 _ 4000 K  CRI >90 690,7 lm 57,6 lm/W |
| 93/ _ _ White<br>(RAL 9016)                                          |                                         |
| Finish customization<br>(Available options:<br>Vibia colour palette) |                                         |

| Control                       |
|-------------------------------|
| 4874 _ _ / _ 1<br>DALI-2      |
| 4874 _ _ / _ B<br>1-10V, Push |
| 4874 _ _ / _ Z<br>Casambi     |

### Materials

Diffuser: Polycarbonate. Main Body: Aluminum.  
Inner structure: Oak wood.

### Light Source and electronics


1 x LED PLATE 12 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

1 Box 0,44 x 0,44 x 0,35 m  
Vol 0,0678 m<sup>3</sup>  
Gross weight 5 Kg Net weight 4 Kg



## 4876



| Finishes                                                             | LED temperature colour                  |
|----------------------------------------------------------------------|-----------------------------------------|
| 18/ _ _ Graphite<br>(Adapta RF9913WX)                                | /1 _ 2700 K  CRI >90 644,7 lm 54 lm/W   |
| 58/ _ _ Cream<br>(RAL 7044)                                          | /4 _ 4000 K  CRI >90 690,7 lm 57,6 lm/W |
| 93/ _ _ White<br>(RAL 9016)                                          |                                         |
| Finish customization<br>(Available options:<br>Vibia colour palette) |                                         |

| Control                       |
|-------------------------------|
| 4876 _ _ / _ 1<br>DALI-2      |
| 4876 _ _ / _ B<br>1-10V, Push |
| 4876 _ _ / _ Z<br>Casambi     |

### Materials

Diffuser: Polycarbonate. Main Body: Aluminum.  
Inner structure: Oak wood.

### Light Source and electronics


1 x LED PLATE 12 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Packaging

1 Box 0,44 x 0,44 x 0,35 m  
Vol 0,0678 m<sup>3</sup>  
Gross weight 5 Kg Net weight 4 Kg



## 4878



| Finishes                                      | LED temperature colour                                       |
|-----------------------------------------------|--------------------------------------------------------------|
| ● <b>18/</b> __ Graphite<br>(Adapta RF9913WX) | <b>/1</b> _ 2700 K <b>/F</b><br>CRI >90 2207 lm 98 lm/W      |
| ● <b>58/</b> __ Cream<br>(RAL 7044)           | <b>/4</b> _ 4000 K <b>/F</b><br>CRI >90 2364,6 lm 105,1 lm/W |
| ● <b>93/</b> __ White<br>(RAL 9016)           |                                                              |

Finish customization  
(Available options:  
Vibia colour palette)

**Materials**  
Diffuser: Polycarbonate. Main Body: Aluminum.  
Inner structure: Oak wood.

**Light Source and electronics**  
1 x LED PLATE 26,5 W 700 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Control


**4878** \_\_ / \_\_ A  
DALI-2, 1-10V, Push

**4878** \_\_ / \_\_ Z  
Casambi

## Packaging

1 Box 0,79 x 0,79 x 0,59 m  
Vol 0,3682 m<sup>3</sup>  
Gross weight 16 Kg Net weight 14 Kg

## 4880



| Finishes                                      | LED temperature colour                                       |
|-----------------------------------------------|--------------------------------------------------------------|
| ● <b>18/</b> __ Graphite<br>(Adapta RF9913WX) | <b>/1</b> _ 2700 K <b>/F</b><br>CRI >90 2207 lm 98 lm/W      |
| ● <b>58/</b> __ Cream<br>(RAL 7044)           | <b>/4</b> _ 4000 K <b>/F</b><br>CRI >90 2364,6 lm 105,1 lm/W |
| ● <b>93/</b> __ White<br>(RAL 9016)           |                                                              |

Finish customization  
(Available options:  
Vibia colour palette)

**Materials**  
Diffuser: Polycarbonate. Main Body: Aluminum.  
Inner structure: Oak wood.

**Light Source and electronics**  
1 x LED PLATE 26,5 W 700 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Control

**4880** \_\_ / \_\_ A  
DALI-2, 1-10V, Push

**4880** \_\_ / \_\_ Z  
Casambi

## Packaging

1 Box 0,79 x 0,79 x 0,59 m  
Vol 0,3682 m<sup>3</sup>  
Gross weight 16 Kg Net weight 14 Kg







# Warm

Design by Ramos & Bassols

Offering a contemporary take on a timeless design, Warm features a generously sized, classic drum shade, with a careful selected colour palette that provides a contemporary touch.

## Table




### 4895

#### Finishes

- 10 White (NCS S 0300-N)

LED 2700 K 470 lm

4895 10



#### Materials

Shade: Screen. Diffuser: Methacrylate.  
Rod: Aluminum. Base: Steel.

#### Light Source and electronics

3 x LED G9 230V 3,8 W

#### Packaging

2 Boxes  
Total Vol 0,0390 m³  
Gross weight 2,9 Kg Net weight 1,3 Kg

#### Notes

On/off switch on the cable.  
Electric cable 2 m




### 4896

#### Finishes

- 10 White (NCS S 0300-N)
- 25 Beige D1 (NCS S 4005-Y50R)
- 28 Brown M1 (NCS S 4020-Y60R)
- 56 Green D1 (NCS S 7010-G30Y)

LED 2700 K 470 lm

4896 \_ \_



#### Finish customization

(Available options:  
Vibia colour palette)

#### Materials

Shade: Aluminum. Diffuser: Methacrylate.  
Rod: Aluminum. Base: Steel.

#### Light Source and electronics

3 x LED G9 230V 3,8 W

#### Packaging

2 Boxes  
Total Vol 0,0390 m³  
Gross weight 2,9 Kg Net weight 2 Kg

#### Notes

On/off switch on the cable.  
Electric cable 2 m






#### 4900

##### Finishes

10 White  
(NCS S 0300-N)

LED 2700 K 1520 lm

4900 10



##### Materials

Shade: Screen. Diffuser: Methacrylate.  
Rod: Aluminum. Base: Steel.

##### Light Source and electronics

3 x LED E27 230V 12 W

##### Packaging

2 Boxes  
Total Vol 0,2153 m³  
Gross weight 4,3 Kg Net weight 3,8 Kg

##### Notes

On/off switch on the cable.  
Electric cable 2 m




#### 4901

##### Finishes

10 White  
(NCS S 0300-N)  
25 Beige D1  
(NCS S 4005-Y50R)  
28 Brown M1  
(NCS S 4020-Y60R)  
56 Green D1  
(NCS S 7010-G30Y)

LED 2700 K 1520 lm

4901 \_\_



Finish customization  
(Available options:  
Vibia colour palette)

##### Materials

Shade: Aluminum. Diffuser: Methacrylate.  
Rod: Aluminum. Base: Steel.

##### Light Source and electronics

3 x LED E27 230V 12 W

##### Packaging

2 Boxes  
Total Vol 0,2153 m³  
Gross weight 4,8 Kg Net weight 4,3 Kg


##### Notes

On/off switch on the cable.  
Electric cable 2 m




Warm

Floor

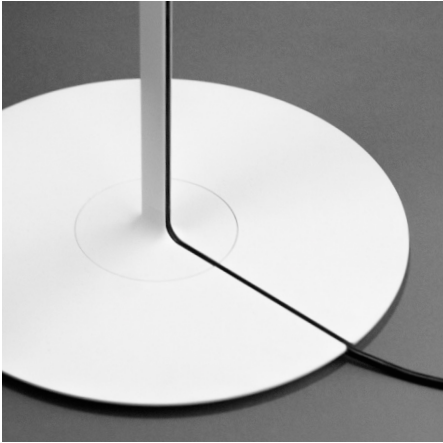

4905



Finishes

10 White  
(NCS S 0300-N)

LED 2700 K 1520 lm

4905 10

780,00 €

Materials

Shade: Screen. Diffuser: Methacrylate.  
Rod: Aluminum. Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging


2 Boxes  
Total Vol 0,3426 m<sup>3</sup>  
Gross weight 10,2 Kg Net weight 6,3 Kg

Notes

On/off switch on the cable.  
Electric cable 2,5 m



4906



Finishes

10 White  
(NCS S 0300-N)  
25 Beige D1  
(NCS S 4005-Y50R)  
28 Brown M1  
(NCS S 4020-Y60R)  
56 Green D1  
(NCS S 7010-G30Y)

LED 2700 K 1520 lm

4906 \_ \_

Finish customization

(Available options:  
Vibia colour palette)

Materials

Shade: Aluminum. Diffuser: Methacrylate.  
Rod: Aluminum. Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes  
Total Vol 0,3426 m<sup>3</sup>  
Gross weight 10,7 Kg Net weight 6,8 Kg

Notes

On/off switch on the cable.  
Electric cable 2,5 m



Warm

Pendants

4925 4926

4930




ø 62 cm



ø 90 cm



#### 4925



##### Finishes

- 10 White (NCS S 0300-N)

LED 2700 K 1520 lm

4925 10

##### Materials

Shade: Screen. Canopy: Steel.  
Diffuser: Methacrylate.

##### Light Source and electronics

4 x LED E27 230V 12 W

##### Packaging


1 Box 0,68 x 0,68 x 0,39 m  
Vol 0,18 m<sup>3</sup>  
Gross weight 7,7 Kg Net weight 3,9 Kg

##### Notes

Extra cable length. 16,00 €/m



#### 4926



##### Finishes

- 10 White (NCS S 0300-N)
- 25 Beige D1 (NCS S 4005-Y50R)
- 28 Brown M1 (NCS S 4020-Y60R)
- 56 Green D1 (NCS S 7010-G30Y)

LED 2700 K 1520 lm

4926 --

##### Finish customization

(Available options:  
Vibia colour palette)

##### Materials

Shade: Aluminum. Canopy: Steel.  
Diffuser: Methacrylate.

##### Light Source and electronics

4 x LED E27 230V 12 W

##### Packaging


1 Box 0,77 x 0,77 x 0,50 m  
Vol 0,2965 m<sup>3</sup>  
Gross weight 8,9 Kg Net weight 5,1 Kg

##### Notes

Extra cable length. 16,00 €/m



#### 4930



##### Finishes

- 10 White (NCS S 0300-N)

LED 2700 K 1520 lm

4930 10

##### Materials

Shade: Screen. Canopy: Steel.  
Diffuser: Methacrylate.

##### Light Source and electronics

4 x LED E27 230V 12 W

##### Packaging

1 Box 0,77 x 0,77 x 0,50 m  
Vol 0,2965 m<sup>3</sup>  
Gross weight 8,9 Kg Net weight 7,7 Kg

##### Notes

Extra cable length. 16,00 €/m





# Ghost

Design by Arik Levy

A study in contrasts, the Ghost collection embodies both spirit and materiality, discretion and presence. A contemporary reimagining of the grand lights that once graced entryways and living areas, its sensuous form radiates a welcoming, luminous sensitivity.

---

## Table




Ø 47,5 cm

**4960**



Ø 47,5 cm

**4965**

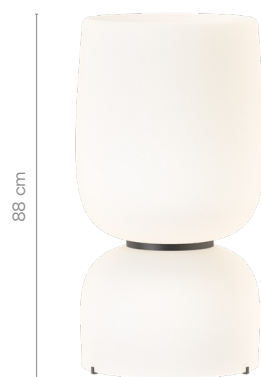


Ø 47,5 cm

**4970**



A colour glass diffuser  
can be placed in the  
lower glass for an amber  
or burgundy light effect



## Dimming and installation options

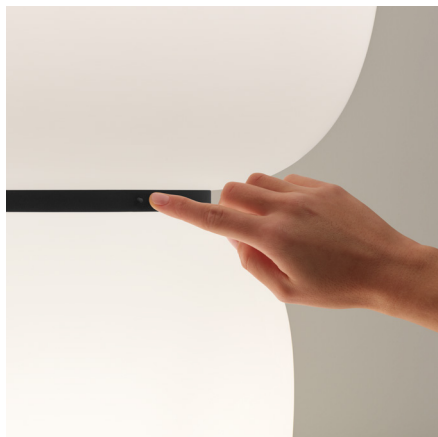

/15: Push-dimming model equipped with two buttons, one for each diffuser. A quick push turns the light on and off, a longer presson dims the light.

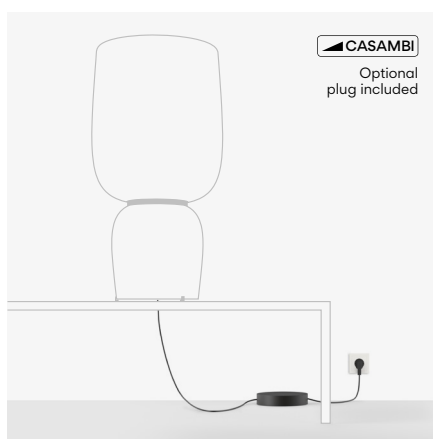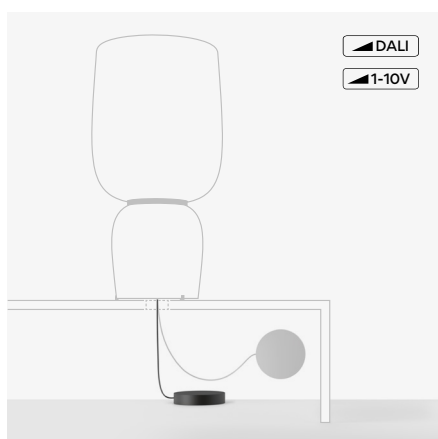


Dimming and installation options:  
The driver of the DALI, 1-10V and Casambi versions is enclosed in a box at the end of the cable.

### 4960

Finishes  
● 11/ \_ \_ Black  
(NCS S 8500-N)

LED temperature colour  
/1\_ 2700 K   
CRI >90 5432,0 lm 137 lm/W

Control  
4960 \_ \_ / \_ 1  
DALI  
4960 \_ \_ / \_ 3  
1-10V  
4960 \_ \_ / \_ 5  
Push  
4960 \_ \_ / \_ Z  
Casambi

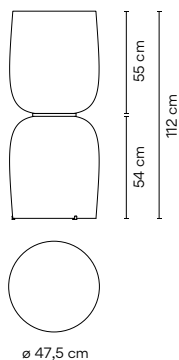

Materials  
Diffuser: Opal Glass.  
Metal parts: Aluminum.


Light Source and electronics  
2 x LED 19,8 W 800 mA  
Constant Current 800 mA  
100~240V 50/60Hz

Packaging  
2 Boxes  
Total Vol 0,6051 m³  
Gross weight 25,7 Kg Net weight 22,7 Kg

Notes  
A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect. Electric cable 2 m.  
Extra cable length. 16,00 €/m

LED IP20 CE Dimmer Bi-volt

4965



Finishes

● 11/ \_ \_ Black

(NCS S 8500-N)

LED temperature colour

/1 \_ 2700 K 

CRI >90 5432,0 lm 137 lm/W

Control

4965 \_ \_ / \_ 1

DALI

4965 \_ \_ / \_ 3

1-10V

4965 \_ \_ / \_ 5

Push

4965 \_ \_ / \_ Z

Casambi

Materials

Diffuser: Opal Glass.

Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA

Constant Current 800 mA

100~240V 50/60Hz

Packaging

2 Boxes

Total Vol 0,6051 m³

Gross weight 20,6 Kg Net weight 17,6 Kg

Notes

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect. Electric cable 2 m.

Extra cable length. 16,00 €/m

LED



IP20






Dimmer

Bi-volt

4970



Finishes

● 11/ \_ \_ Black

(NCS S 8500-N)

LED temperature colour

/1 \_ 2700 K 

CRI >90 5432,0 lm 137 lm/W

Control

4970 \_ \_ / \_ 1

DALI

4970 \_ \_ / \_ 3

1-10V

4970 \_ \_ / \_ 5

Push

4970 \_ \_ / \_ Z

Casambi

Materials

Diffuser: Opal Glass.

Metal parts: Aluminum.

Light Source and electronics

2 x LED 19,8 W 800 mA

Constant Current 800 mA

100~240V 50/60Hz

Packaging

2 Boxes

Total Vol 0,6051 m³

Gross weight 21,7 Kg Net weight 18,7 Kg

Notes

A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect. Electric cable 2 m.

Extra cable length. 16,00 €/m

LED



IP20






Dimmer

Bi-volt

## Pendants



4987



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1\_ 2700 K   
 CRI >90 4826,7 lm 130 lm/W

**Control**  
 4987 \_ \_ / \_ A  
 DALI-2, 1-10V, Push

4987 \_ \_ / \_ Z  
 Casambi

**Materials**  
 Diffuser: Opal Glass.  
 Metal parts: Aluminum.

**Light Source and electronics**  
 1 x LED 37,2 W 1050 mA  
 Constant Current 1050 mA  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,61 x 0,62 x 0,80 m  
 Vol 0,3026 m³  
 Gross weight 13,9 Kg Net weight 12,4 Kg  
 Extra cable length. 16,00 €/m

LED  IP20   Dimmer  Bi-volt

# Join

Design by Jordi Vilardell

Join is marked by its unique glass-within-a-glass design. Crafted of precision glass, it features a cylinder-shaped structure which houses an interior glass shade.

## Table




### 5066

#### Finishes

● 01 Borosilicate glass LED 2700 K 470 lm

5066 01



#### Materials

Lamp holder: Ceramic.  
Top: Brass.

Light Source and electronics  
1 x LED G9 DIM 4 W

#### Packaging

1 Box 0,29 x 0,38 x 0,38 m  
Vol 0,0419 m<sup>3</sup>  
Gross weight 2,12 Kg Net weight 0,9 Kg

#### Notes

On/ Off switch on the cable.  
Electric cable 2 m




### 5068

#### Finishes

● 01 Blown-glass LED 2700 K 470 lm

#### Control

5068 01



#### Materials

Lamp holder: Ceramic.  
Top: Brass.

Light Source and electronics  
1 x LED G9 DIM 4 W


#### Packaging

1 Box 0,42 x 0,42 x 0,61 m  
Vol 0,1076 m<sup>3</sup>  
Gross weight 6,4 Kg Net weight 5,2 Kg

#### Notes

On/ Off switch on the cable.  
Electric cable 2 m



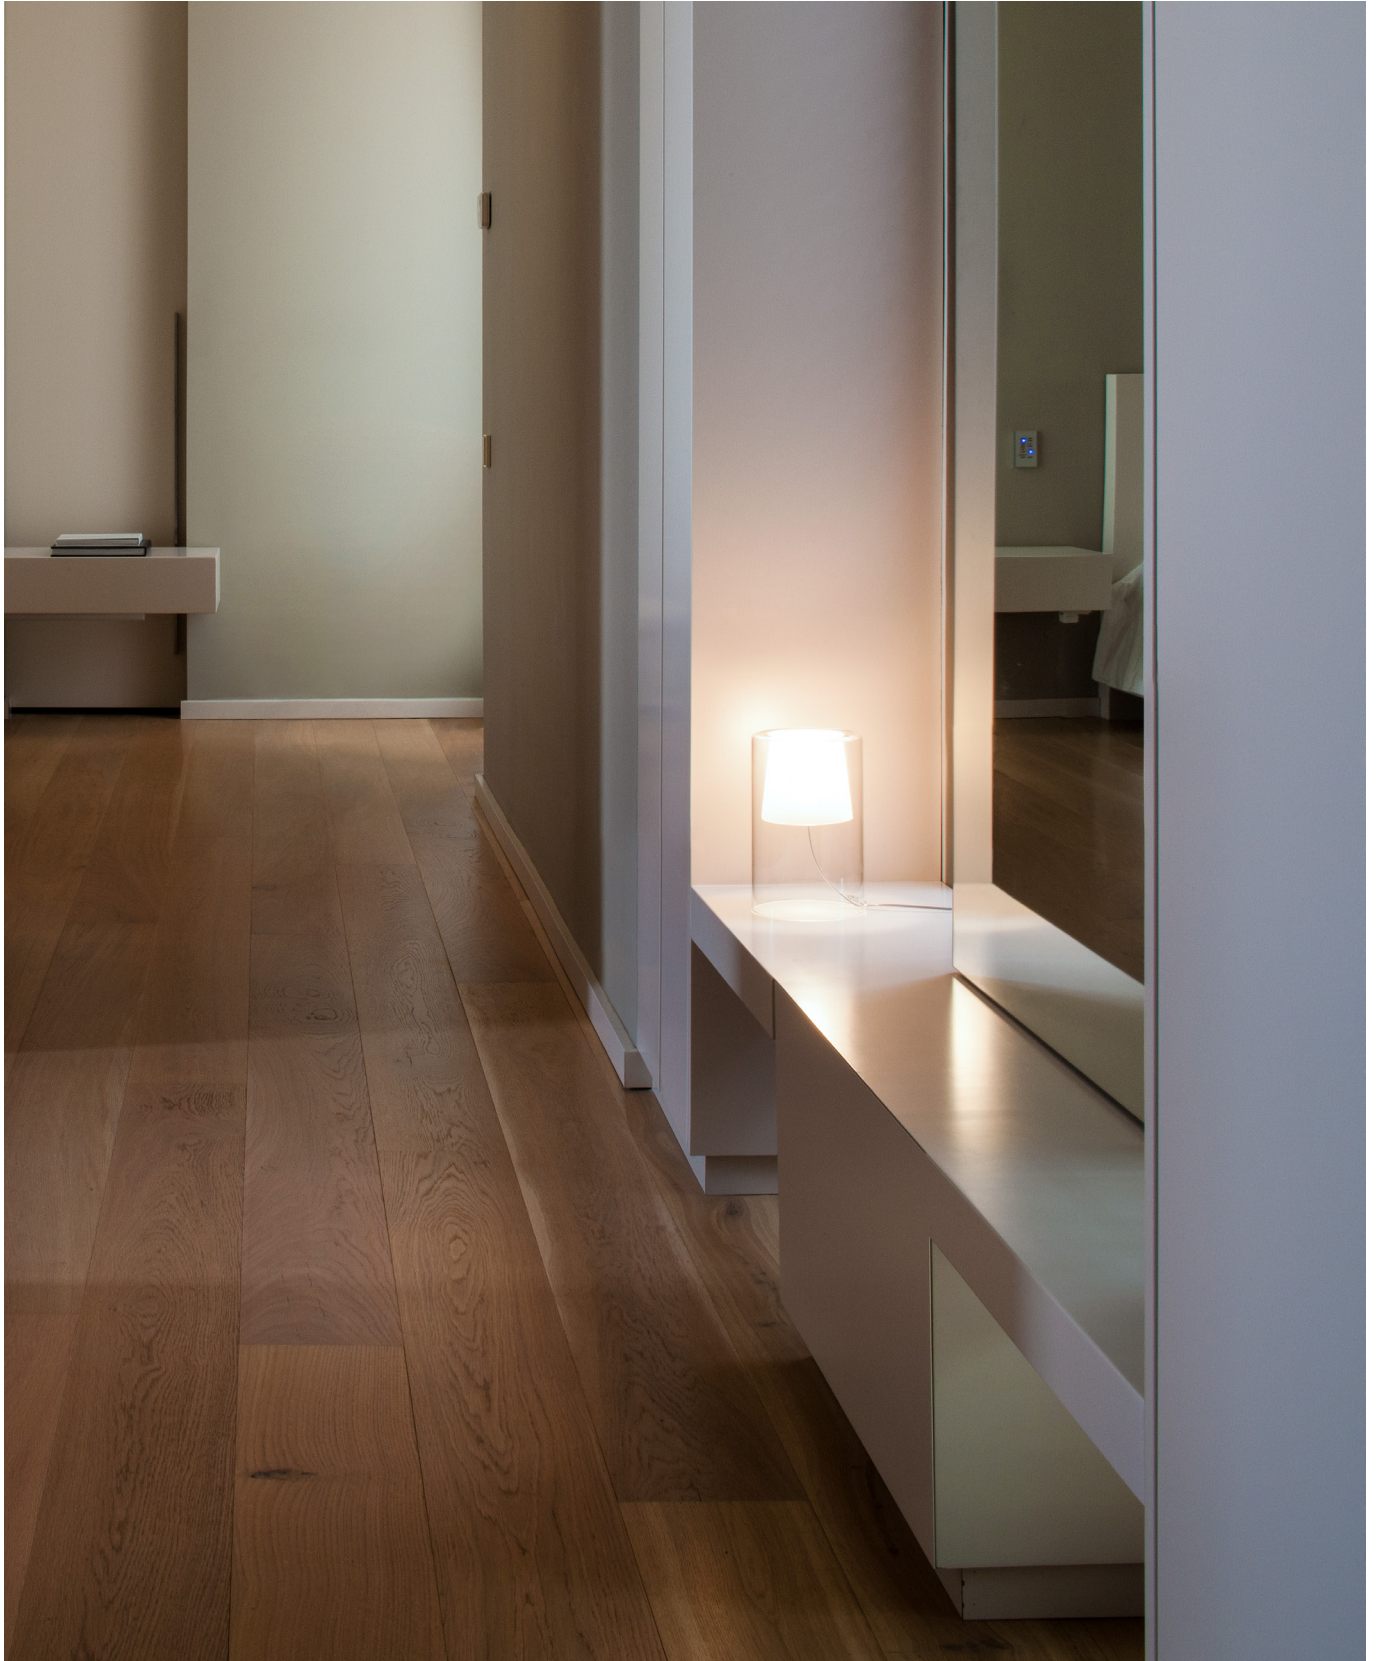




# Balance

Design by Jordi Vilardell

Balance features a classic drum shade cantilevered from its column. Adjusting a small pull cord on the diffuser activates the fixture's counterweight system, enabling it to move to the right or left, or up or down-all the while remaining parallel to the floor.

## Floor

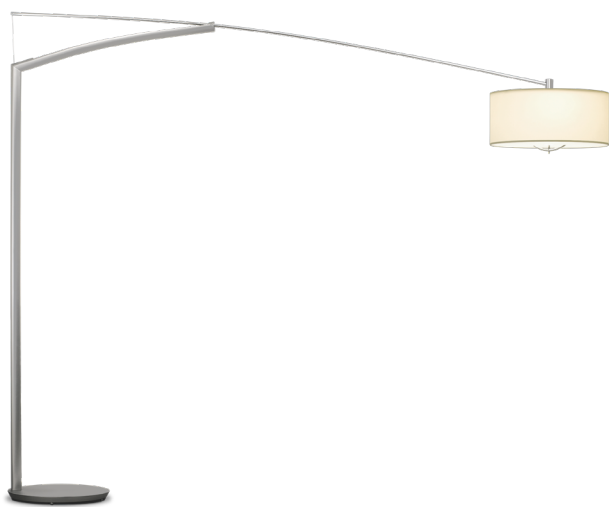


210 x 260 cm

5189 5190




210 x 215 cm

5191 5192

|                                                                                                |                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>5189</p>  | <p>Finishes</p> <ul style="list-style-type: none"><li>01 Chrome (Metallic finish)</li><li>18 Graphite (RAL 7016)</li><li>30 Nickel (Metallic finish)</li></ul> <p>LED 2700K 1520 lm Dim</p> <p>Materials</p> <p>Vertical tube: Aluminum. Base: Steel.</p> <p>Arm: Inox. Shade: Grey fabric.</p> <p>Light Source and electronics</p> <p>3 x E27 230V 12 W</p> | <p>Control</p> <p>5189 TRIAC</p> <p>Packaging</p> <p>3 Boxes</p> <p>Total Vol 0,3472 m³</p> <p>Gross weight 53,8 Kg Net weight 49,5 Kg</p> <p>Notes</p> <p>Dimmer on the cable. 3 m</p> <p>IP20 CE EAC Dimmer</p> |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 5190



### Finishes

- 01 Chrome (Metallic finish)
- 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

### Control

5190 TRIAC

### Materials

Vertical tube: Aluminum. Base: Steel.  
Arm: Inox. Shade: Parchment.

### Light Source and electronics

3 x E27 230V 12 W

### Packaging


3 Boxes  
Total Vol 0,3472 m³  
Gross weight 53,8 Kg Net weight 49,5 Kg

### Notes

Dimmer on the cable. 3 m



## 5191



### Finishes

- 01 Chrome (Metallic finish)
- 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

### Control

5191 TRIAC

### Materials

Vertical tube: Aluminum. Base: Steel.  
Arm: Inox. Shade: Parchment.

### Light Source and electronics

3 x E27 230V 12 W

### Packaging


3 Boxes  
Total Vol 0,3472 m³  
Gross weight 53,8 Kg Net weight 49,1 Kg

### Notes

Dimmer on the cable. 3 m



## 5192



### Finishes

- 01 Chrome (Metallic finish)
- 18 Graphite (RAL 7016)
- 30 Nickel (Metallic finish)

LED 2700K 1520 lm Dim

### Control

5192 TRIAC

### Materials

Vertical tube: Aluminum. Base: Steel.  
Arm: Inox. Shade: Grey fabric.

### Light Source and electronics

3 x E27 230V 12 W

### Packaging

3 Boxes  
Total Vol 0,3472 m³  
Gross weight 53,8 Kg Net weight 49,1 Kg

### Notes

Dimmer on the cable. 3 m



# Puck

Design by Jordi Vilardell

Inspired by the classic circle silhouette, Puck panel light's simple, spherical forms can be superimposed on one another, lending sensibility overhead. Crafted of premium, opal triplex blown glass, it casts a warm glow.

## Ceiling Wall



16 cm

**5400 5402**



24,4 cm

**5410**



27,2 cm

**5412**




31,8 cm

**5425 5427**




46,7 cm

**5430 5432**



56,8 cm

**5435 5437**



53,2 cm


**5440 5442**



79 cm

**5445 5447**

**5400**



Finishes

● **03 White**  
(RAL 9016)

LED temperature colour

2700 K 470 lm

**5400 03**

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics


1 x LED G9 4,2 W

Packaging

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0175 m<sup>3</sup>  
Gross weight 0,85 Kg Net weight 0,6 Kg



5402



Finishes  
03/ \_ \_ White  
(RAL 9016)

LED temperature colour  
/1 \_ 2700 K   
CRI >90 415,7 lm 130 lm/W

Control  
5402 \_ \_ / \_ 0  
On/ Off

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics


1 x LED PLATE 3,2 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0175 m<sup>3</sup>  
Gross weight 0,85 Kg Net weight 0,6 Kg



5410



Finishes  
03 White  
(RAL 9016)

LED temperature colour  
2700 K 470 lm

5410 03

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics


2 x LED G9 4,2 W

Packaging

1 Box 0,37 x 0,37 x 0,23 m  
Vol 0,0315 m<sup>3</sup>  
Gross weight 0,95 Kg Net weight 0,7 Kg



5412



Finishes  
03/ \_ \_ White  
(RAL 9016)

LED temperature colour  
/1 \_ 2700 K   
CRI >90 880,1 lm 116 lm/W

Control  
5412 \_ \_ / \_ 0  
On/ Off

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics


1 x LED PLATE 7,6 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 0,23 m  
Vol 0,0315 m<sup>3</sup>  
Gross weight 0,95 Kg Net weight 0,7 Kg



5425



Finishes  
03 White  
(RAL 9016)

LED temperature colour  
2700 K 470 lm

5425 03

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

2 x LED G9 4,2 W

Packaging


1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes

All version require only one electrical connection



5427



Finishes  
03/ \_ \_ White  
(RAL 9016)

LED temperature colour  
/1 \_ 2700 K   
CRI >90 831,4 lm 130 lm/W

Control  
5427 \_ \_ / \_ 0  
On/ Off

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

2 x LED PLATE 3,2 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz





Packaging

1 Box 0,25 x 0,42 x 0,42 m  
Vol 0,0441 m<sup>3</sup>  
Gross weight 2,26 Kg Net weight 1,08 Kg


Notes

All version require only one electrical connection



|                                                                                                                                                                                                                                                                                                                                                                                                                               |                             |  |                                                                                                                            |  |                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--|----------------------------------------------------------------------------------------------------------------------------|--|---------------------------|
| 5430                                                                                                                                                                                                                                                                                                                                                                                                                          | Finishes                    |  | LED temperature colour                                                                                                     |  | 5430 03                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                               | 03 White<br>(RAL 9016)      |  | 2700 K 470 lm                                                                                                              |  |                           |
| <div><div></div></div>                                                                                                                                                                                                                                                                                                                       |                             |  |                                                                                                                            |  |                           |
| Materials                                                                                                                                                                                                                                                                                                                                                                                                                     |                             |  | Packaging                                                                                                                  |  |                           |
| Canopy: Aluminum.<br>Diffuser: Blown-glass.                                                                                                                                                                                                                                                                                                                                                                                   |                             |  | 1 Box 0,27 x 0,60 x 0,60 m<br>Vol 0,0972 m³<br>Gross weight 4,2 Kg Net weight 2,15 Kg                                      |  |                           |
| Light Source and electronics                                                                                                                                                                                                                                                                                                                                                                                                  |                             |  | Notes                                                                                                                      |  |                           |
| 2 x LED G9 4,2 W                                                                                                                                                                                                                                                                                                                                                                                                              |                             |  | All version require only one electrical connection                                                                         |  |                           |
| <div><div> IP20</div><div> CE</div><div> EAC</div><div> Bi-volt</div></div>         |                             |  |                                                                                                                            |  |                           |
| 5432                                                                                                                                                                                                                                                                                                                                                                                                                          | Finishes                    |  | LED temperature colour                                                                                                     |  | 5432 _ _ / _ 0<br>On/ Off |
|                                                                                                                                                                                                                                                                                                                                                                                                                               | 03/ _ _ White<br>(RAL 9016) |  | /1 _ 2700 K  CRI >90 1760,2 lm 116 lm/W   |  |                           |
| <div><div></div></div>                                                                                                                                                                                                                                                                                                                      |                             |  |                                                                                                                            |  |                           |
| Materials                                                                                                                                                                                                                                                                                                                                                                                                                     |                             |  | Packaging                                                                                                                  |  |                           |
| Canopy: Aluminum.<br>Diffuser: Blown-glass.                                                                                                                                                                                                                                                                                                                                                                                   |                             |  | 1 Box 0,27 x 0,60 x 0,60 m<br>Vol 0,0972 m³<br>Gross weight 4,2 Kg Net weight 2,15 Kg                                      |  |                           |
| Light Source and electronics                                                                                                                                                                                                                                                                                                                                                                                                  |                             |  | Notes                                                                                                                      |  |                           |
| 2 x LED PLATE 7,6 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz                                                                                                                                                                                                                                                                                                                                                     |                             |  | All version require only one electrical connection                                                                         |  |                           |
| <div><div> IP20</div><div> CE</div><div> EAC</div><div> Bi-volt</div></div> |                             |  |                                                                                                                            |  |                           |
| 5435                                                                                                                                                                                                                                                                                                                                                                                                                          | Finishes                    |  | LED temperature colour                                                                                                     |  | 5435 03                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                               | 03 White<br>(RAL 9016)      |  | 2700 K 470 lm                                                                                                              |  |                           |
| <div><div></div></div>                                                                                                                                                                                                                                                                                                                     |                             |  |                                                                                                                            |  |                           |
| Materials                                                                                                                                                                                                                                                                                                                                                                                                                     |                             |  | Packaging                                                                                                                  |  |                           |
| Canopy: Aluminum.<br>Diffuser: Blown-glass.                                                                                                                                                                                                                                                                                                                                                                                   |                             |  | 2 Boxes<br>Total Vol 0,0780 m³<br>Gross weight 7,5 Kg Net weight 4,1 Kg                                                    |  |                           |
| Light Source and electronics                                                                                                                                                                                                                                                                                                                                                                                                  |                             |  | Notes                                                                                                                      |  |                           |
| 3 x LED G9 4,2 W                                                                                                                                                                                                                                                                                                                                                                                                              |                             |  | All version require only one electrical connection                                                                         |  |                           |
| <div><div> IP20</div><div> CE</div><div> EAC</div><div> Bi-volt</div></div> |                             |  |                                                                                                                            |  |                           |
| 5437                                                                                                                                                                                                                                                                                                                                                                                                                          | Finishes                    |  | LED temperature colour                                                                                                     |  | 5437 _ _ / _ 0<br>On/ Off |
|                                                                                                                                                                                                                                                                                                                                                                                                                               | 03/ _ _ White<br>(RAL 9016) |  | /1 _ 2700 K  CRI >90 2640,4 lm 116 lm/W |  |                           |
| <div><div></div></div>                                                                                                                                                                                                                                                                                                                     |                             |  |                                                                                                                            |  |                           |
| Materials                                                                                                                                                                                                                                                                                                                                                                                                                     |                             |  | Packaging                                                                                                                  |  |                           |
| Canopy: Aluminum.<br>Diffuser: Blown-glass.                                                                                                                                                                                                                                                                                                                                                                                   |                             |  | 2 Boxes<br>Total Vol 0,0780 m³<br>Gross weight 7,5 Kg Net weight 4,1 Kg                                                    |  |                           |
| Light Source and electronics                                                                                                                                                                                                                                                                                                                                                                                                  |                             |  | Notes                                                                                                                      |  |                           |
| 3 x LED PLATE 7,6 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz                                                                                                                                                                                                                                                                                                                                                     |                             |  | All version require only one electrical connection                                                                         |  |                           |
| <div><div> IP20</div><div> CE</div><div> EAC</div><div> Bi-volt</div></div> |                             |  |                                                                                                                            |  |                           |

5440



Finishes

03 White  
(RAL 9016)

LED temperature colour

2700 K 470 lm

5440 03

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

2 x LED G9 4,2 W

Packaging


2 Boxes  
Total Vol 0,1060 m³  
Gross weight 7,8 Kg Net weight 4,57 Kg

Notes

All version require only one electrical connection



5442



Finishes

03/ \_ \_ White  
(RAL 9016)

LED temperature colour

/1\_ 2700 K E  
CRI >90 3520,5 lm 116 lm/W

Control

5442 \_ \_ / \_ 0  
On/ Off

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

4 x LED PLATE 7,6 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging


2 Boxes  
Total Vol 0,1060 m³  
Gross weight 7,8 Kg Net weight 4,57 Kg

Notes

All version require only one electrical connection



5445



Finishes

03 White  
(RAL 9016)

LED temperature colour

2700 K 470 lm

5445 03

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

7 x LED G9 4,2 W

Packaging


2 Boxes  
Total Vol 0,19 m³  
Gross weight 12,5 Kg Net weight 8,84 Kg

Notes

All version require only one electrical connection



5447



Finishes

03/ \_ \_ White  
(RAL 9016)

LED temperature colour

/1\_ 2700 K E  
CRI >90 6160,8 lm 116 lm/W

Control

5447 \_ \_ / \_ 0  
On/ Off

Materials

Canopy: Aluminum.  
Diffuser: Blown-glass.

Light Source and electronics

7 x LED PLATE 7,6 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,19 m³  
Gross weight 12,5 Kg Net weight 8,84 Kg

Notes

All version require only one electrical connection





# Puck Wall Art


Design by Jordi Vilardell

Puck Wall Art is comprised of different disks to create a warm, visually sharp and mathematically creative effect. There are four sizes of disks, allowing the designer to play with varied combinations of indirect light. The resulting design comprises a set of highly dynamic, sculptural compositions.


## Wall



Each project is unique.  
Personalise your own  
Puck Wall Art composition  
quick and easy.

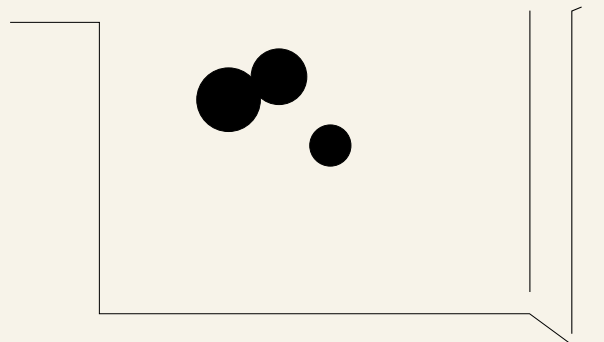

## 5470



- Finishes**
- 15/ \_\_ Grey L2  
(NCS S 2500-N)
  - 21/ \_\_ Black Grey  
(NCS S 7000-N)
  - 28/ \_\_ Brown M1  
(NCS S 4020-Y60R)

- LED temperature colour**
- /1\_ 2700 K CRI >90 952,5 lm 113 lm/W
  - /3\_ 3500 K CRI >90 1017,4 lm 121,1 lm/W

### Control

- 5970 \_\_ / \_ 1  
DALI-2
- 5970 \_\_ / \_ 3  
1-10V
- 5970 \_\_ / \_ 4  
Triac
- 5970 \_\_ / \_ 5  
Push
- 5970 \_\_ / \_ Z  
Casambi

- Finishes**
- 76/ \_\_ Grey Felt L1
  - 77/ \_\_ Grey Felt D1

- LED temperature colour**
- /1\_ 2700 K CRI >90 952,5 lm 113 lm/W
  - /3\_ 3500 K CRI >90 1017,4 lm 121,1 lm/W

### Control

- 5970 \_\_ / \_ 1  
DALI-2
- 5970 \_\_ / \_ 3  
1-10V
- 5970 \_\_ / \_ 4  
Triac
- 5970 \_\_ / \_ 5  
Push
- 5970 \_\_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum.

### Light Source and electronics

- 1 x LED STRIP 8,4 W 700 mA  
Constant Current 700 mA
- / \_ 1 110~240V 50/60Hz Bi-volt
- / \_ 3 110~240V 50/60Hz Bi-volt
- / \_ 5 110~240V 50/60Hz Bi-volt
- / \_ 4 220~240V 50/60Hz
- / \_ Z 220~240V 50/60Hz

### Packaging

1 Box 0,34 x 0,34 x 0,23 m  
Vol 0,0266 m³  
Gross weight 2,6 Kg Net weight 1,6 Kg

### Notes

A maximum of 8 modules can be connected  
to a single connection point. For bigger  
compositions, check connection system



5471

| Finishes                                                     | LED temperature colour                                             |
|--------------------------------------------------------------|--------------------------------------------------------------------|
| <div><div></div>15/ _ _ Grey L2<br/>(NCS S 2500-N)</div>     | /1 _ 2700 K <div></div> <div>CRI &gt;90 1435,9 lm 114 lm/W</div>   |
| <div><div></div>21/ _ _ Black Grey<br/>(NCS S 7000-N)</div>  | /3 _ 3500 K <div></div> <div>CRI &gt;90 1533,8 lm 121,7 lm/W</div> |
| <div><div></div>28/ _ _ Brown M1<br/>(NCS S 4020-Y60R)</div> |                                                                    |

| Control                   |
|---------------------------|
| 5471 _ _ / _ 1<br>DALI-2  |
| 5471 _ _ / _ 3<br>1-10V   |
| 5471 _ _ / _ 4<br>Triac   |
| 5471 _ _ / _ 5<br>Push    |
| 5471 _ _ / _ Z<br>Casambi |

| Finishes                                   | LED temperature colour                                             |
|--------------------------------------------|--------------------------------------------------------------------|
| <div><div></div>76/ _ _ Grey Felt L1</div> | /1 _ 2700 K <div></div> <div>CRI &gt;90 1435,9 lm 114 lm/W</div>   |
| <div><div></div>77/ _ _ Grey Felt D1</div> | /3 _ 3500 K <div></div> <div>CRI &gt;90 1533,8 lm 121,7 lm/W</div> |

| Control                   |
|---------------------------|
| 5471 _ _ / _ 1<br>DALI-2  |
| 5471 _ _ / _ 3<br>1-10V   |
| 5471 _ _ / _ 4<br>Triac   |
| 5471 _ _ / _ 5<br>Push    |
| 5471 _ _ / _ Z<br>Casambi |

## Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum.

## Light Source and electronics

1 x LED STRIP 12,6 W 700 mA  
Constant Current 700 mA  
/ \_ 1 110~240V 50/60Hz Bi-volt  
/ \_ 3 110~240V 50/60Hz Bi-volt  
/ \_ 5 110~240V 50/60Hz Bi-volt  
/ \_ 4 220~240V 50/60Hz  
/ \_ Z 220~240V 50/60Hz


## Packaging

1 Box 0,44 x 0,44 x 0,25 m  
Vol 0,0484 m³  
Gross weight 3,5 Kg Net weight 1,9 Kg

## Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

5472



| Finishes                              | LED temperature colour                                                                        | Control                   |
|---------------------------------------|-----------------------------------------------------------------------------------------------|---------------------------|
| 15/ _ _ Grey L2<br>(NCS S 2500-N)     | /1 _ 2700 K  | 5472 _ _ / _ 1<br>DALI-2  |
| 21/ _ _ Black Grey<br>(NCS S 7000-N)  | /3 _ 3500 K  | 5472 _ _ / _ 3<br>1-10V   |
| 28/ _ _ Brown M1<br>(NCS S 4020-Y60R) |                                                                                               | 5472 _ _ / _ 4<br>Triac   |
|                                       |                                                                                               | 5472 _ _ / _ 5<br>Push    |
|                                       |                                                                                               | 5471 _ _ / _ Z<br>Casambi |

| Finishes             | LED temperature colour                                                                        | Control                   |
|----------------------|-----------------------------------------------------------------------------------------------|---------------------------|
| 76/ _ _ Grey Felt L1 | /1 _ 2700 K  | 5472 _ _ / _ 1<br>DALI-2  |
| 77/ _ _ Grey Felt D1 | /3 _ 3500 K  | 5472 _ _ / _ 3<br>1-10V   |
|                      |                                                                                               | 5472 _ _ / _ 4<br>Triac   |
|                      |                                                                                               | 5472 _ _ / _ 5<br>Push    |
|                      |                                                                                               | 5472 _ _ / _ Z<br>Casambi |

#### Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum.

#### Light Source and electronics

1 x LED STRIP 12,6 W 700 mA  
Constant Current 700 mA  
/ \_ 1 110~240V 50/60Hz Bi-volt  
/ \_ 3 110~240V 50/60Hz Bi-volt  
/ \_ 5 110~240V 50/60Hz Bi-volt  
/ \_ 4 220~240V 50/60Hz  
/ \_ Z 220~240V 50/60Hz

#### Packaging


1 Box 0,51 x 0,51 x 0,26 m  
Vol 0,0676 m<sup>3</sup>  
Gross weight 4,75 Kg Net weight 2,25 Kg

#### Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED  IP20  EAC  Bi-volt

5474




| Finishes                                | LED temperature colour                                                                        | Control        |
|-----------------------------------------|-----------------------------------------------------------------------------------------------|----------------|
| ● 15/ _ _ Grey L2<br>(NCS S 2500-N)     | /1 _ 2700 K  | 5474 _ _ / _ 1 |
| ● 21/ _ _ Black Grey<br>(NCS S 7000-N)  | CRI >90 952,5 lm 113 lm/W                                                                     | DALI-2         |
| ● 28/ _ _ Brown M1<br>(NCS S 4020-Y60R) | /3 _ 3500 K  | 5474 _ _ / _ 3 |
|                                         | CRI >90 1017,4 lm 121,1 lm/W                                                                  | 1-10V          |
|                                         |                                                                                               | 5474 _ _ / _ 4 |
|                                         |                                                                                               | Triac          |
|                                         |                                                                                               | 5474 _ _ / _ 5 |
|                                         |                                                                                               | Push           |
|                                         |                                                                                               | 5474 _ _ / _ Z |
|                                         |                                                                                               | Casambi        |

| Finishes                                 | LED temperature colour                                                                        | Control        |
|------------------------------------------|-----------------------------------------------------------------------------------------------|----------------|
| ● 71/ _ _ Grey Felt L1<br>& Grey Felt D1 | /1 _ 2700 K  | 5474 _ _ / _ 1 |
| ● 76/ _ _ Grey Felt L1                   | CRI >90 952,5 lm 113 lm/W                                                                     | DALI-2         |
|                                          | /3 _ 3500 K  | 5474 _ _ / _ 3 |
|                                          | CRI >90 1017,4 lm 121,1 lm/W                                                                  | 1-10V          |
|                                          |                                                                                               | 5474 _ _ / _ 4 |
|                                          |                                                                                               | Triac          |
|                                          |                                                                                               | 5474 _ _ / _ 5 |
|                                          |                                                                                               | Push           |
|                                          |                                                                                               | 5474 _ _ / _ Z |
|                                          |                                                                                               | Casambi        |

| Materials                            | Packaging                                |
|--------------------------------------|------------------------------------------|
| Diffuser: Polycarbonate. Shade: ABS. | 1 Box 0,51 x 0,51 x 0,26 m               |
| Wall support: Aluminum. Ring: Steel. | Vol 0,0676 m³                            |
|                                      | Gross weight 4,75 Kg Net weight 2,25 Kg  |
| Light Source and electronics         | Notes                                    |
| 1 x LED STRIP 8,4 W 700 mA           | A maximum of 8 modules can be connected  |
| Constant Current 700 mA              | to a single connection point. For bigger |
| / _ 1 110~240V 50/60Hz Bi-volt       | compositions, check connection system    |
| / _ 3 110~240V 50/60Hz Bi-volt       |                                          |
| / _ 5 110~240V 50/60Hz Bi-volt       |                                          |
| / _ 4 220~240V 50/60Hz               |                                          |
| / _ Z 220~240V 50/60Hz               |                                          |

LED  IP20  EAC  Bi-volt

## 5476



| Finishes                                      | LED temperature colour                                    | Control                              |
|-----------------------------------------------|-----------------------------------------------------------|--------------------------------------|
| ● <b>15/</b> __ Grey L2<br>(NCS S 2500-N)     | <b>/1</b> 2700 K <b>E</b><br>CRI >90 1435,9 lm 114 lm/W   | <b>5476</b> __ / <b>1</b><br>DALI-2  |
| ● <b>21/</b> __ Black Grey<br>(NCS S 7000-N)  | <b>/3</b> 3500 K <b>E</b><br>CRI >90 1533,8 lm 121,7 lm/W | <b>5476</b> __ / <b>3</b><br>1-10V   |
| ● <b>28/</b> __ Brown M1<br>(NCS S 4020-Y60R) |                                                           | <b>5476</b> __ / <b>4</b><br>Triac   |
|                                               |                                                           | <b>5476</b> __ / <b>5</b><br>Push    |
|                                               |                                                           | <b>5476</b> __ / <b>Z</b><br>Casambi |

| Finishes                                       | LED temperature colour                                    | Control                              |
|------------------------------------------------|-----------------------------------------------------------|--------------------------------------|
| ● <b>71/</b> __ Grey Felt L1<br>& Grey Felt D1 | <b>/1</b> 2700 K <b>E</b><br>CRI >90 1435,9 lm 114 lm/W   | <b>5476</b> __ / <b>1</b><br>DALI-2  |
| ● <b>76/</b> __ Grey Felt L1                   | <b>/3</b> 3500 K <b>E</b><br>CRI >90 1533,8 lm 121,7 lm/W | <b>5476</b> __ / <b>3</b><br>1-10V   |
|                                                |                                                           | <b>5476</b> __ / <b>4</b><br>Triac   |
|                                                |                                                           | <b>5476</b> __ / <b>5</b><br>Push    |
|                                                |                                                           | <b>5476</b> __ / <b>Z</b><br>Casambi |

### Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum. Ring: Steel.

### Light Source and electronics

1 x LED STRIP 12,6 W 700 mA  
Constant Current 700 mA  
/ **1** 110~240V 50/60Hz Bi-volt  
/ **3** 110~240V 50/60Hz Bi-volt  
/ **5** 110~240V 50/60Hz Bi-volt  
/ **4** 220~240V 50/60Hz  
/ **Z** 220~240V 50/60Hz

### Packaging

1 Box 0,66 x 0,66 x 0,235 m  
Vol 0,1024 m³  
Gross weight 6,3 Kg Net weight 2,9 Kg


### Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt



5480



Finishes

- 15/ \_ \_ Grey L2  
(NCS S 2500-N)
- 28/ \_ \_ Brown M1  
(NCS S 4020-Y60R)
- 72/ \_ \_ Grey D1  
& Grey L2

LED temperature colour

- /1 \_ 2700 K   
CRI >90 2388,4 lm 114 lm/W
- /3 \_ 3500 K   
CRI >90 2551,3 lm 121,5 lm/W

Control

- 5480 \_ \_ / \_ 1  
DALI-2
- 5480 \_ \_ / \_ 3  
1-10V
- 5480 \_ \_ / \_ 4  
Triac
- 5480 \_ \_ / \_ 5  
Push
- 5480 \_ \_ / \_ Z  
Casambi

Finishes

- 71/ \_ \_ Grey Felt L1  
& Grey Felt D1
- 76/ \_ \_ Grey Felt L1

LED temperature colour

- /1 \_ 2700 K   
CRI >90 2388,4 lm 114 lm/W
- /3 \_ 3500 K   
CRI >90 2551,3 lm 121,5 lm/W

Control

- 5480 \_ \_ / \_ 1  
DALI-2
- 5480 \_ \_ / \_ 3  
1-10V
- 5480 \_ \_ / \_ 4  
Triac
- 5480 \_ \_ / \_ 5  
Push
- 5480 \_ \_ / \_ Z  
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum.

Light Source and electronics

- 1 x LED STRIP 8,4 W 700 mA
- 1 x LED STRIP 12,6 W 700 mA
- Constant Current 700 mA
- / \_ 1 110~240V 50/60Hz Bi-volt
- / \_ 3 110~240V 50/60Hz Bi-volt
- / \_ 5 110~240V 50/60Hz Bi-volt
- / \_ 4 220~240V 50/60Hz
- / \_ Z 220~240V 50/60Hz

Packaging


1 Box 0,46 x 0,46 x 0,4 m  
Vol 0,0846 m³  
Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

A maximum of 8 modules can be connected  
to a single connection point. For bigger  
compositions, check connection system

## 5481



| Finishes                                      | LED temperature colour                           | Control                                |
|-----------------------------------------------|--------------------------------------------------|----------------------------------------|
| ● <b>15/</b> __ Grey L2<br>(NCS S 2500-N)     | <b>/1</b> 2700 K<br>CRI >90 2871,9 lm 114 lm/W   | <b>5481</b> __ / <b>_ 1</b><br>DALI-2  |
| ● <b>28/</b> __ Brown M1<br>(NCS S 4020-Y60R) | <b>/3</b> 3500 K<br>CRI >90 3067,7 lm 121,7 lm/W | <b>5481</b> __ / <b>_ 3</b><br>1-10V   |
| ● <b>72/</b> __ Grey D1<br>& Grey L2          |                                                  | <b>5481</b> __ / <b>_ 4</b><br>Triac   |
|                                               |                                                  | <b>5481</b> __ / <b>_ 5</b><br>Push    |
|                                               |                                                  | <b>5481</b> __ / <b>_ Z</b><br>Casambi |

| Finishes                                       | LED temperature colour                           | Control                                |
|------------------------------------------------|--------------------------------------------------|----------------------------------------|
| ● <b>71/</b> __ Grey Felt L1<br>& Grey Felt D1 | <b>/1</b> 2700 K<br>CRI >90 2871,9 lm 114 lm/W   | <b>5481</b> __ / <b>_ 1</b><br>DALI-2  |
| ● <b>76/</b> __ Grey Felt L1                   | <b>/3</b> 3500 K<br>CRI >90 3067,7 lm 121,7 lm/W | <b>5481</b> __ / <b>_ 3</b><br>1-10V   |
|                                                |                                                  | <b>5481</b> __ / <b>_ 4</b><br>Triac   |
|                                                |                                                  | <b>5481</b> __ / <b>_ 5</b><br>Push    |
|                                                |                                                  | <b>5481</b> __ / <b>_ Z</b><br>Casambi |

### Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum.


### Light Source and electronics

1 x LED STRIP 8,4 W 700 mA  
1 x LED STRIP 12,6 W 700 mA  
Constant Current 700 mA  
**/ \_ 1** 110~240V 50/60Hz Bi-volt  
**/ \_ 3** 110~240V 50/60Hz Bi-volt  
**/ \_ 5** 110~240V 50/60Hz Bi-volt  
**/ \_ 4** 220~240V 50/60Hz  
**/ \_ Z** 220~240V 50/60Hz

### Packaging

1 Box 0,46 x 0,46 x 0,4 m  
Vol 0,0846 m<sup>3</sup>  
Gross weight 6,1 Kg Net weight 3,4 Kg

5485



Finishes

- 72/ \_ \_ Grey D1 & Grey L2
- 73/ \_ \_ Brown M1 & Grey D1)

LED temperature colour

- /1 \_ 2700 K CRI >90 2388,4 lm 114 lm/W
- /3 \_ 3500 K CRI >90 2551,3 lm 121,5 lm/W

Control

- 5485 \_ \_ / \_ 1 DALI-2
- 5485 \_ \_ / \_ 3 1-10V
- 5485 \_ \_ / \_ 4 Triac
- 5485 \_ \_ / \_ 5 Push
- 5485 \_ \_ / \_ Z Casambi

Finishes

- 71/ \_ \_ Grey Felt L1 & Grey Felt D1

LED temperature colour

- /1 \_ 2700 K CRI >90 2388,4 lm 114 lm/W
- /3 \_ 3500 K CRI >90 2551,3 lm 121,5 lm/W

Control

- 5485 \_ \_ / \_ 1 DALI-2
- 5485 \_ \_ / \_ 3 1-10V
- 5485 \_ \_ / \_ 4 Triac
- 5485 \_ \_ / \_ 5 Push
- 5485 \_ \_ / \_ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum. Ring: Steel.

Light Source and electronics


- 1 x LED STRIP 8,4 W 700 mA
- 1 x LED STRIP 12,6 W 700 mA
- Constant Current 700 mA
- / \_ 1 110~240V 50/60Hz Bi-volt
- / \_ 3 110~240V 50/60Hz Bi-volt
- / \_ 5 110~240V 50/60Hz Bi-volt
- / \_ 4 220~240V 50/60Hz
- / \_ Z 220~240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,43 m  
Vol 0,118 m³  
Gross weight 8,42 Kg Net weight 4,22 Kg



## 5486



| Finishes                       | LED temperature colour                                          | Control                   |
|--------------------------------|-----------------------------------------------------------------|---------------------------|
| 72/ _ _ Grey D1<br>& Grey L2   | /1_ 2700 K <input type="text"/><br>CRI >90 2871,9 lm 114 lm/W   | 5486 _ _ / _ 1<br>DALI-2  |
| 73/ _ _ Brown M1<br>& Grey D1) | /3_ 3500 K <input type="text"/><br>CRI >90 3067,7 lm 121,7 lm/W | 5486 _ _ / _ 3<br>1-10V   |
|                                |                                                                 | 5486 _ _ / _ 4<br>Triac   |
|                                |                                                                 | 5486 _ _ / _ 5<br>Push    |
|                                |                                                                 | 5486 _ _ / _ Z<br>Casambi |

| Finishes                               | LED temperature colour                                          | Control                   |
|----------------------------------------|-----------------------------------------------------------------|---------------------------|
| 71/ _ _ Grey Felt L1<br>& Grey Felt D1 | /1_ 2700 K <input type="text"/><br>CRI >90 2871,9 lm 114 lm/W   | 5486 _ _ / _ 1<br>DALI-2  |
|                                        | /3_ 3500 K <input type="text"/><br>CRI >90 3067,7 lm 121,7 lm/W | 5486 _ _ / _ 3<br>1-10V   |
|                                        |                                                                 | 5486 _ _ / _ 4<br>Triac   |
|                                        |                                                                 | 5486 _ _ / _ 5<br>Push    |
|                                        |                                                                 | 5486 _ _ / _ Z<br>Casambi |

### Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum. Ring: Steel.

### Light Source and electronics

2 x LED STRIP 12,6 W 700 mA  
Constant Current 700 mA

/ \_ 1 110~240V 50/60Hz Bi-volt  
/ \_ 3 110~240V 50/60Hz Bi-volt  
/ \_ 5 110~240V 50/60Hz Bi-volt  
/ \_ 4 220~240V 50/60Hz  
/ \_ Z 220~240V 50/60Hz

### Packaging

1 Box 0,66 x 0,66 x 0,5 m  
Vol 0,2178 m³  
Gross weight 11,35 Kg Net weight 5,45 Kg

LED IP20 CE EAC Bi-volt

5487

21/ \_ \_ Black Grey

(NCS S 7000-N)

73/ \_ \_ Brown M1

& Grey D1

LED temperature colour

/1 \_ 2700 K 

E

CRI >90 2388,4 lm 114 lm/W

/3 \_ 3500 K 

E

CRI >90 2551,3 lm 121,5 lm/W

Control

5487 \_ \_ / \_ 1

DALI-2

5487 \_ \_ / \_ 3

1-10V

5487 \_ \_ / \_ 4

Triac

5487 \_ \_ / \_ 5

Push

5471 \_ \_ / \_ Z

Casambi

71/ \_ \_ Grey Felt L1

& Grey Felt D

LED temperature colour

/1 \_ 2700 K 

E

CRI >90 2388,4 lm 114 lm/W

/3 \_ 3500 K 

E

CRI >90 2551,3 lm 121,5 lm/W

Control

5487 \_ \_ / \_ 1

DALI-2

5487 \_ \_ / \_ 3

1-10V

5487 \_ \_ / \_ 4

Triac

5487 \_ \_ / \_ 5

Push

5487 \_ \_ / \_ Z

Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.

Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA

1 x LED STRIP 12,6 W 700 mA

Constant Current 700 mA

/ \_ 1 110~240V 50/60Hz Bi-volt

/ \_ 3 110~240V 50/60Hz Bi-volt

/ \_ 5 110~240V 50/60Hz Bi-volt

/ \_ 4 220~240V 50/60Hz

/ \_ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m

Vol 0,2178 m³

Gross weight 11,52 Kg Net weight 5,62 Kg

LED

IP20

CE

EAC

Bi-volt

9 cm

11 cm

ø 60 cm

87 cm

ø 45 cm

87 cm

21/ \_ \_ Black Grey

(NCS S 7000-N)

73/ \_ \_ Brown M1

& Grey D1

LED temperature colour

/1 \_ 2700 K 

E

CRI >90 2388,4 lm 114 lm/W

/3 \_ 3500 K 

E

CRI >90 2551,3 lm 121,5 lm/W

Control

5487 \_ \_ / \_ 1

DALI-2

5487 \_ \_ / \_ 3

1-10V

5487 \_ \_ / \_ 4

Triac

5487 \_ \_ / \_ 5

Push

5471 \_ \_ / \_ Z

Casambi

71/ \_ \_ Grey Felt L1

& Grey Felt D

LED temperature colour

/1 \_ 2700 K 

E

CRI >90 2388,4 lm 114 lm/W

/3 \_ 3500 K 

E

CRI >90 2551,3 lm 121,5 lm/W

Control

5487 \_ \_ / \_ 1

DALI-2

5487 \_ \_ / \_ 3

1-10V

5487 \_ \_ / \_ 4

Triac

5487 \_ \_ / \_ 5

Push

5487 \_ \_ / \_ Z

Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.

Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA

1 x LED STRIP 12,6 W 700 mA

Constant Current 700 mA

/ \_ 1 110~240V 50/60Hz Bi-volt

/ \_ 3 110~240V 50/60Hz Bi-volt

/ \_ 5 110~240V 50/60Hz Bi-volt

/ \_ 4 220~240V 50/60Hz

/ \_ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m

Vol 0,2178 m³

Gross weight 11,52 Kg Net weight 5,62 Kg

LED


IP20

CE

EAC

Bi-volt

## 5491



### Finishes

- 72/ \_ \_ Grey D1 & Grey L2
- 73/ \_ \_ Brown M1 & Grey D1

### LED temperature colour

- /1\_ 2700 K CRI >90 4307,8 lm 114 lm/W
- /3\_ 3500 K CRI >90 4601,5 lm 121,7 lm/W

### Control

- 5491 \_ \_ / \_ 1 DALI-2
- 5491 \_ \_ / \_ 3 1-10V
- 5491 \_ \_ / \_ 4 Triac
- 5491 \_ \_ / \_ 5 Push
- 5491 \_ \_ / \_ Z Casambi

### Finishes

- 71/ \_ \_ Grey Felt L1 & Grey Felt D1

### LED temperature colour

- /1\_ 2700 K CRI >90 4307,8 lm 114 lm/W
- /3\_ 3500 K CRI >90 4601,5 lm 121,7 lm/W

### Control

- 5491 \_ \_ / \_ 1 DALI-2
- 5491 \_ \_ / \_ 3 1-10V
- 5491 \_ \_ / \_ 4 Triac
- 5491 \_ \_ / \_ 5 Push
- 5491 \_ \_ / \_ Z Casambi

### Materials

Diffuser: Polycarbonate. Shade: ABS.  
Wall support: Aluminum. Ring: Steel.

### Light Source and electronics

3 x LED STRIP 12,6 W 700 mA  
Constant Current 700 mA

- / \_ 1 110~240V 50/60Hz Bi-volt
- / \_ 3 110~240V 50/60Hz Bi-volt
- / \_ 5 110~240V 50/60Hz Bi-volt
- / \_ 4 220~240V 50/60Hz
- / \_ Z 220~240V 50/60Hz

### Packaging

1 Box 0,66 x 0,66 x 0,67 m  
Vol 0,2919 m<sup>3</sup>  
Gross weight 14,85 Kg Net weight 7,35 Kg




# Mayfair Mini

Design by Diego Fortunato


Mayfair is a modern reimagining of the traditional 19th-century lights, distinguished by its timeless design and sleek silhouette.

## Table



|                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>5495</p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"><li>23 Warm White (NCS S 0502-Y50R)</li><li>25 Beige D1 (NCS S 4005-Y50R)</li><li>37 Terra Red (NCS S 4040-Y70R)</li><li>47 Green L1 (NCS S 6005-G80Y)</li></ul> <p><b>LED temperature colour</b></p> <p>/1_ 2700 K  CRI &gt;90 175 lm 70 lm/W</p> <p><b>Materials</b></p> <p>Base and shade: Polycarbonate. Diffuser: Translucent polycarbonate. Stem: Stainless steel.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED PLATE 5V 2,5 W<br/>Constant Voltage 5V<br/>100~240V 50/60Hz</p> | <p><b>Control</b></p> <p>5495 __ / __ 6<br/>Touch sensor</p> <p><b>Packaging</b></p> <p>1 Box 0,25 x 0,26 x 0,50 m<br/>Vol 0,033 m³<br/>Gross weight 1,62 Kg Net weight 0,73 Kg</p> <p><b>Notes</b></p> <p>Rechargeable battery autonomy:<br/>6h at 100% Intensity.<br/>12h at 50% Intensity.<br/>18h at 25% Intensity.<br/>USB-C cable: length 1,20 m<br/>(from the base to the USB charger).</p> <p>    </p> |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

5496



#### Finishes

- 23 Warm White (NCS S 0502-Y50R)
- 25 Beige D1 (NCS S 4005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 47 Green L1 (NCS S 6005-G80Y)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 175 lm 70 lm/W

#### Control

5496 \_ \_ / \_ 6  
Touch sensor

#### Materials

Base and shade: Polycarbonate. Diffuser: Translucent polycarbonate. Stem: Stainless steel.

#### Light Source and electronics

1 x LED PLATE 5V 2,5 W  
Constant Voltage 5V  
100~240V 50/60Hz

#### Packaging


1 Box 0,25 x 0,26 x 0,50 m  
Vol 0,033 m<sup>3</sup>  
Gross weight 1,84 Kg Net weight 0,94 Kg

#### Notes

Cable length: 1 m  
(from the base to the USB charger)

LED IP20   EAC  Bi-volt

5497



#### Finishes

- 23 Warm White (NCS S 0502-Y50R)
- 25 Beige D1 (NCS S 4005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 47 Green L1 (NCS S 6005-G80Y)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 175 lm 70 lm/W

#### Control

5497 \_ \_ / \_ 0  
On/ Off

5497 \_ \_ / \_ 1  
DALI

5497 \_ \_ / \_ 3  
1-10V

#### Materials

Base and shade: Polycarbonate. Diffuser: Translucent polycarbonate. Stem: Stainless steel.

#### Light Source and electronics

1 x LED PLATE 5V 2,5 W  
Constant Voltage 5V  
100~240V 50/60Hz

#### Packaging

1 Box 0,25 x 0,26 x 0,50 m  
Vol 0,033 m<sup>3</sup>  
Gross weight 1,45 Kg Net weight 0,54 Kg

#### Notes

Cable length: 1 m. (the cable connects directly to the remote driver)

LED IP20   EAC  Bi-volt



# Mayfair

Design by Diego Fortunato

Mayfair is a modern reimagining of the traditional 19<sup>th</sup>-century lights, distinguished by its timeless design and sleek silhouette.

## Table Floor




### 5500

- Finishes**
- 07/ \_ \_ Graphite and green (RAL 7016, RAL 6026)
  - 08/ \_ \_ Graphite and orange (RAL 7016, RAL 2009)

**LED temperature colour**  
 /1\_ 2700 K   
 CRI >90 2027,0 lm 135 lm/W

**Control**  
 5500 \_ / \_ 6  
 Optical sensor



#### Materials

Diffuser: Polycarbonate. Shade: Methacrylate.  
 Tube: Steel. Base: Zamak.

#### Light Source and electronics

1 x LED STRIP 24V 2,4 W  
 1 x LED STRIP 24V 12,6 W  
 Constant Voltage 24V  
 100~240V 50/60Hz

#### Packaging


1 Box 0,22 x 0,35 x 0,61 m  
 Vol 0,0470 m<sup>3</sup>  
 Gross weight 3,6 Kg Net weight 3,4 Kg

#### Notes

Touch dimmer on base. Electric cable 2 m.  
 Ask if you require Push without memory (hotel room type)

LED  IP20  EAC   
 Dimmer  Bi-volt

5505



- Finishes
- 18/ \_ \_ Graphite (RAL 7016)
  - 93/ \_ \_ White (RAL 9016)

Finish customization  
(Available options:  
Vibia colour palette)

LED temperature colour  
/1\_ 2700 K   
CRI >90 2027,0 lm 135 lm/W

Control  
5505 \_ \_ / \_ 6  
Optical sensor

- Finishes
- 20/ \_ \_ Gold
  - 67/ \_ \_ Copper

LED temperature colour  
/1\_ 2700 K   
CRI >90 2027,0 lm 135 lm/W

Control  
5505 \_ \_ / \_ 6  
Optical sensor

#### Materials

Diffuser: Polycarbonate. Shade and tube: Steel.  
Base: Zamak.

#### Light Source and electronics

1 x LED STRIP 24V 2,4 W  
1 x LED STRIP 24V 12,6 W  
Constant Voltage 24V  
100-240V 50/60Hz

#### Packaging

1 Box 0,22 x 0,35 x 0,61 m  
Vol 0,0470 m<sup>3</sup>  
Gross weight 3,6 Kg Net weight 3,4 Kg

#### Notes


Touch dimmer on base. Electric cable 2 m

LED IP20

Dimmer Bi-volt



5510



Finishes

07/ \_ \_ Graphite and green (RAL 7016. RAL 6026)

08/ \_ \_ Graphite and orange (RAL 7016. RAL 2009)

LED temperature colour

/1\_ 2700 K  CRI >90 2027,0 lm 135 lm/W

Control

5510 \_ \_ / \_ 6  
Optical sensor

Materials

Diffuser: Polycarbonate. Shade: Methacrylate. Tube: Steel. Base: Zamak.

Light Source and electronics

1 x LED STRIP 24V 2,4 W  
1 x LED STRIP 24V 12,6 W  
Constant Voltage 24V  
100~240V 50/60Hz

Packaging

1 Box 1,50 x 0,32 x 0,34 m  
Vol 0,1630 m³  
Gross weight 12,8 Kg Net weight 6,2 Kg

Notes

Touch dimmer on shade. Electric cable 2 m

LED



IP20




EAC



Dimmer

Bi-volt

5515



Finishes

18/ \_ \_ Graphite (RAL 7016)

93/ \_ \_ White (RAL 9016)

Finish customization  
(Available options:  
Vibia colour palette)

LED temperature colour

/1\_ 2700 K  CRI >90 2027,0 lm 135 lm/W

Control

5515 \_ \_ / \_ 6  
Optical sensor

Finishes

20/ \_ \_ Gold

67/ \_ \_ Copper

LED temperature colour

/1\_ 2700 K  CRI >90 2027,0 lm 135 lm/W

Control

5515 \_ \_ / \_ 6  
Optical sensor

Materials

Diffuser: Polycarbonate. Shade and tube: Steel. Base: Zamak.

Light Source and electronics

1 x LED STRIP 24V 2,4 W  
1 x LED STRIP 24V 12,6 W  
Constant Voltage 24V  
100~240V 50/60Hz

Packaging

1 Box 1,50 x 0,32 x 0,34 m  
Vol 0,1630 m³  
Gross weight 12,8 Kg Net weight 6,2 Kg

Notes

Touch dimmer on shade. Electric cable 2 m

LED



IP20



EAC



Dimmer

Bi-volt






## Pendants



### 5520



**Finishes**

07/ \_ \_ Graphite and green (RAL 7016. RAL 6026)

08/ \_ \_ Graphite and orange (RAL 7016. RAL 2009)

**LED temperature colour**

/1\_ 2700 K  CRI >90 2027,0 lm 135 lm/W

**Control**

5520 \_ \_ / \_ 1 DALI

5520 \_ \_ / \_ B 1-10V, Push

5520 \_ \_ / \_ Z Casambi

**Materials**

Diffuser: Polycarbonate. Shade: Methacrylate. Tube and canopy: Steel.

**Light Source and electronics**

1 x LED STRIP 24V 2,4 W  
1 x LED STRIP 24V 12,6 W  
Constant Voltage 24V  
220~240V 50/60Hz

**Packaging**

1 Box 0,50 x 0,31 x 0,31 m  
Vol 0,0500 m<sup>3</sup>  
Gross weight 2,8 Kg Net weight 1,8 Kg

**Notes**

Extra cable length. 16,00 €/m

LED  IP20  EAC 

**Electrical connection**

Surface

\_18 Free Wire


\_23 Built-in

\_31 Remote Micro for plaster ceilings

\_32 Remote XXS for all types of drop ceilings



5525



| Finishes                                                             | LED temperature colour                                                                          |
|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| ● 18/ _ _ Graphite<br>(RAL 7016)                                     | /1 _ 2700 K  |
| ● 93/ _ _ White<br>(RAL 9016)                                        | CRI >90 2027,0 lm 135 lm/W                                                                      |
| Finish customization<br>(Available options:<br>Vibia colour palette) |                                                                                                 |

| Finishes         | LED temperature colour                                                                          |
|------------------|-------------------------------------------------------------------------------------------------|
| ● 20/ _ _ Gold   | /1 _ 2700 K  |
| ● 67/ _ _ Copper | CRI >90 2027,0 lm 135 lm/W                                                                      |

| Control                       |
|-------------------------------|
| 5525 _ _ / _ 1<br>DALI        |
| 5525 _ _ / _ B<br>1-10V, Push |
| 5525 _ _ / _ Z<br>Casambi     |

| Control                       |
|-------------------------------|
| 5525 _ _ / _ 1<br>DALI        |
| 5525 _ _ / _ B<br>1-10V, Push |
| 5525 _ _ / _ Z<br>Casambi     |

Materials

Diffuser: Polycarbonate.  
Shade, tube and canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 2,4 W  
1 x LED STRIP 24V 12,6 W  
Constant Voltage 24V  
220~240V 50/60Hz

Packaging

1 Box 0,50 x 0,31 x 0,31 m  
Vol 0,0500 m³  
Gross weight 2,9 Kg Net weight 1,9 Kg

Notes

Extra cable length. 16,00 €/m

Electrical connection

Surface

\_18 Free Wire

\_23 Built-in

\_31 Remote Micro for plaster ceilings


\_32 Remote XXS for all types of drop ceilings




# Composing pendants

Next sketches are composed by one or more compositions

---

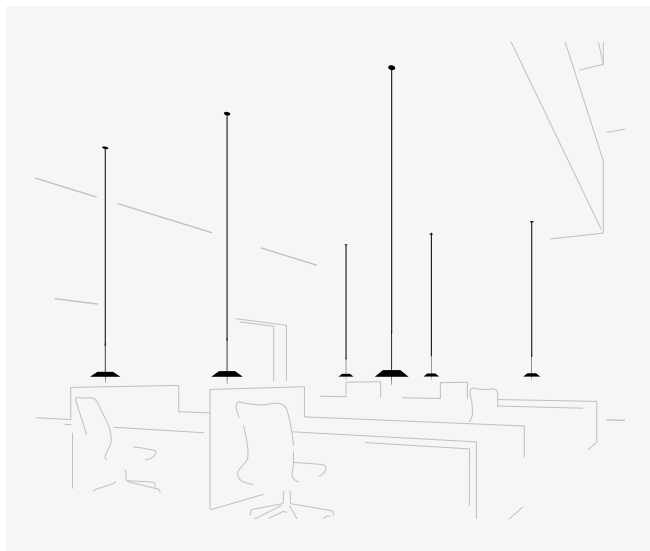

6 x 5520.

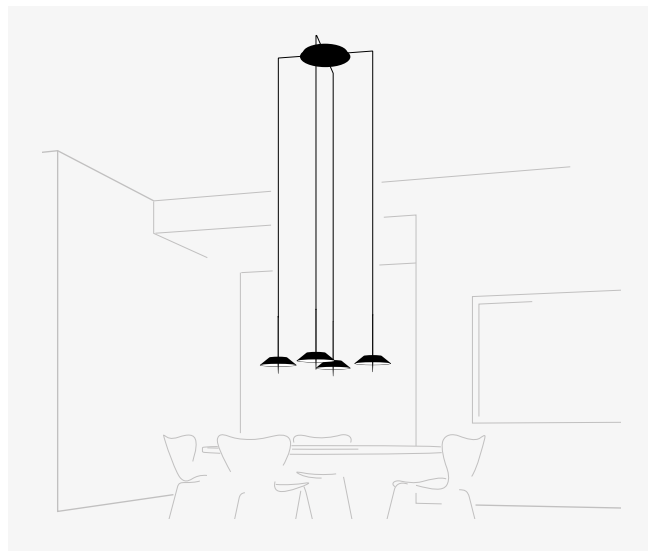

4 x 5525.



4 x 5525.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Mayfair composition quick  
and easy at [vibia.com](http://vibia.com)

# Electrical connection options for models 5520 / 5525


Choose your preferred installation option  
according to your needs.  
For each composition, the optimal minimum  
number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate  
the silkiness and lightness of compositions on  
suspended ceilings, its great visual grandeur taking  
center stage.

For Ref. 5520 / 5525

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.



---

## Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.


For Ref. 5520 / 5525

### Surface




ø 16 cm

match with  
fixture finish.





### Free Wire



1 wire


ø 20 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.



2 - 6 wires

ø 36 cm



7 - 9 wires

ø 40 cm



# Africa

Design by Ichiro Francisco Gomez Paz

An object of desire, Africa is a unique gift that combines richness of form and materiality with high performance lighting capabilities. A holistic exploration of beauty, functionality and the essence of humanity.


## Table



|                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>5580</b></p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"><li>24/ _ _ Beige M1 (NCS S 2005-Y50R)</li><li>25/ _ _ Beige D1 (NCS S 4005-Y50R)</li><li>29/ _ _ Brown D1 (NCS S 8005-Y50R)</li><li>38/ _ _ Terra Dark (NCS S 5040-Y70R)</li></ul> <p><b>LED temperature colour</b></p> <p>/1_ 2700 K  CRI &gt;90 520 lm 117 lm/W</p> <p><b>Materials</b></p> <p>Body: Aluminium.<br/>Diffuser: Polycarbonate</p> <p><b>Light Source and electronics</b></p> <p>1 x LED 4,5W 500 mA<br/>Output: DC 5.0 V 2.0 A 10.0W<br/>Input: 100~240V 50/60Hz</p> | <p><b>Control</b></p> <p><b>5580</b> _ _ / _ <b>5</b><br/>Push</p> <p><b>Packaging</b></p> <p>1 Box 0,08 m x 0,53 m<br/>Vol 0,0026 m³<br/>Gross weight 1,23 Kg Net weight 0,9 Kg</p> <p><b>Notes</b></p> <p>Battery capacity 10.000mAh.<br/>Battery voltage 3,7V.<br/>Rechargeable battery autonomy:<br/>6,5h at 100% Intensity.<br/>10h at 66% Intensity.<br/>20h at 33% Intensity.</p> <p>     </p> |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



5585



#### Finishes

- 24/ \_ \_ Beige M1  
(NCS S 2005-Y50R)
- 25/ \_ \_ Beige D1  
(NCS S 4005-Y50R)
- 29/ \_ \_ Brown D1  
(NCS S 8005-Y50R)
- 38/ \_ \_ Terra Dark  
(NCS S 5040-Y70R)

#### LED temperature colour

/1\_ 2700 K   
 CRI >90 520 lm 117 lm/W

#### Control

5585 \_ \_ / \_ 5  
Push

#### Materials

Body: Aluminium.  
Diffuser: Polycarbonate

#### Light Source and electronics

1 x LED 4,5W 500 mA  
Output: DC 5.0 V 2.0 A 10.0W  
Input: 100-240V 50/60Hz

#### Packaging

1 Box 0,08 m x 0,53 m  
Vol 0,0026 m³  
Gross weight 1,23 Kg Net weight 0,9 Kg

#### Notes

Battery capacity 10.000mAh.  
Battery voltage 3,7V.  
Rechargeable battery autonomy:  
6,5h at 100% Intensity.  
10h at 66% Intensity.  
20h at 33% Intensity.

LED IP20 CE EAC Bi-volt

# North

Design by Arik Levy

North, south, east and west are our points of references in space; we set-out, build and travel according to these coordinates.

---

## Floor




max. 250 cm x max. 210 cm x max. 355 cm

**5600**



max. 270 cm x max. 270 cm x max. 355 cm

**5605**

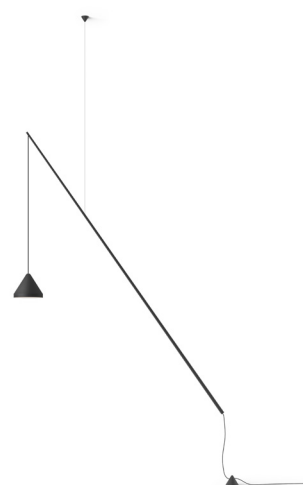

max. 210 cm x max. 310 cm x max. 130 cm

**5666**



max. 447 cm x max. 325 cm x max. 425 cm


**5620**



max. 270 cm x max. 270 cm x max. 355 cm

**5625**

## 5600



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500 N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_ \_ Blue M1 (NCS S 5010-B10G)

### LED temperature colour

/1\_ 2700 K CRI >90 2538,0 lm 141 lm/W

### Control

5600 \_ \_ / \_ 5  
Push

### Materials

Rods: Carbon fiber. Shade: Aluminum  
Diffuser: Methacrylate. Base: Steel.

### Light Source and electronics

2 x LED 9 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Packaging


10 Boxes  
Total Vol 0,37 m³  
Gross weight 92,05 Kg Net weight 79,95 Kg

### Notes

Can be connected with or without plug.  
Electric cable 2,5 m

LED IP20 EAC Dimmer

## 5605



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500 N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_ \_ Blue M1 (NCS S 5010-B10G)

### LED temperature colour

/1\_ 2700 K CRI >90 2538,0 lm 141 lm/W

### Control

5605 \_ \_ / \_ 5  
Push

### Materials

Rods: Carbon fiber. Shade: Aluminum  
Diffuser: Methacrylate. Base: Steel.

### Light Source and electronics

2 x LED 9 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Packaging


10 Boxes  
Total Vol 0,35 m³  
Gross weight 91 Kg Net weight 79,8 Kg

### Notes

Can be connected with or without plug.  
Electric cable 2,5 m

LED IP20 EAC Dimmer

## 5620



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500 N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_ \_ Blue M1 (NCS S 5010-B10G)

### LED temperature colour

/1\_ 2700 K CRI >90 3807 lm 141 lm/W

### Control

5620 \_ \_ / \_ 5  
Push

### Materials

Rods: Carbon fiber. Shade: Aluminum  
Diffuser: Methacrylate. Base: Steel.

### Light Source and electronics

3 x LED 9W 350mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Packaging


12 Boxes  
Total Vol 0,36 m³  
Gross weight 94,85 Kg Net weight 81,25 Kg


### Notes

Can be connected with or without plug.  
Electric cable 2,5 m

LED IP20 EAC Dimmer



|                                                                                                  |                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                       |
|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| <div>5625</div>  | <div>Finishes</div> <div><div><div></div>10/ _ _ White<br/>(NCS S 0300-N)</div><div><div></div>11/ _ _ Black<br/>(NCS S 8500 N)</div><div><div></div>24/ _ _ Beige M1<br/>(NCS S 2005-Y50R)</div><div><div></div>42 / _ _ Blue M1<br/>(NCS S 5010-B10G)</div></div> | <div>LED temperature colour</div> <div>/1 _ 2700 K <br/>CRI &gt;90 5076 lm 141 lm/W</div>                                                                                                                                                                                                                                                                                                                                                                                                  | <div>Control</div> <div>5625 _ _ / _ 5<br/>Push</div> |
|                                                                                                  | <div>Materials</div> <div>Rods: Carbon fiber. Shade: Aluminum<br/>Diffuser: Methacrylate. Base: Steel.</div> <div>Light Source and electronics</div> <div>4 x LED 9W 350mA<br/>Constant Current 350 mA<br/>220~240V 50/60Hz</div>                                   | <div>Packaging</div> <div>14 Boxes<br/>Total Vol 0,47 m³<br/>Gross weight 101,20 Kg Net weight 83,55 Kg</div> <div>Notes</div> <div>Can be connected with or without plug.<br/>Electric cable 2,5 m</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Dimmer</div></div> |                                                       |

|                                                                                                     |                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                       |
|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| <div>5666</div>  | <div>Finishes</div> <div><div><div></div>10/ _ _ White<br/>(NCS S 0300-N)</div><div><div></div>11/ _ _ Black<br/>(NCS S 8500 N)</div><div><div></div>24/ _ _ Beige M1<br/>(NCS S 2005-Y50R)</div><div><div></div>42 / _ _ Blue M1<br/>(NCS S 5010-B10G)</div></div> | <div>LED temperature colour</div> <div>/1 _ 2700 K <br/>CRI &gt;90 1269,0 lm 141 lm/W</div> <div>/2 _ 3000 K <br/>CRI &gt;80 1123 lm 125 lm/W</div> <div>/3 _ 3500 K <br/>CRI &gt;90 1374,9 lm 152,8 lm/W</div>                                                                                                                                                                       | <div>Control</div> <div>5666 _ _ / _ 5<br/>Push</div> |
|                                                                                                     | <div>Materials</div> <div>Rods: Carbon fiber. Shade: Aluminum<br/>Diffuser: Methacrylate. Counterweight: Aluminum</div> <div>Light Source and electronics</div> <div>1 x LED 9 W 350 mA<br/>Constant Current 350 mA<br/>110-240V 50/60Hz</div>                      | <div>Packaging</div> <div>2 Boxes 0,24 x 0,217 x 0,21 m<br/>Total Vol 0,0464 m³<br/>Gross weight 6,2 Kg Net weight 4,05 Kg</div> <div>Notes</div> <div>Electric cable with plug.<br/>Electric cable 2,5 m<br/>Extra cable length. 16,00 €/m</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div><div>Dimmer</div><div>Bi-volt</div></div> |                                                       |



Height-adjustable shade.




Adjustable-angle rods.  
Can be connected with or without plug.





## 5630



| Finishes                              | LED temperature colour                    |
|---------------------------------------|-------------------------------------------|
| 10/ _ _ White<br>(NCS S 0300-N)       | /1 _ 2700 K  CRI >90 1269,0 lm 141 lm/W   |
| 11/ _ _ Black<br>(NCS S 8500 N)       | /2 _ 3000 K  CRI >80 1123 lm 125 lm/W     |
| 24/ _ _ Beige M1<br>(NCS S 2005-Y50R) | /3 _ 3500 K  CRI >90 1374,9 lm 152,8 lm/W |
| 42 / _ _ Blue M1<br>(NCS S 5010-B10G) |                                           |

### Materials

Rods: Carbon fiber. Shade: Aluminum  
Diffuser: Methacrylate. Wall Plate: Steel.

### Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Control

5630 \_ \_ / \_ 5  
Push

### Packaging


3 Boxes  
Total Vol 0,24 m<sup>3</sup>  
Gross weight 11,05 Kg Net weight 5,85 Kg

### Notes

Push-button on the wall plate.  
Can be connected with or without plug.  
Electric cable 2,5 m



## 5635



| Finishes                              | LED temperature colour                    |
|---------------------------------------|-------------------------------------------|
| 10/ _ _ White<br>(NCS S 0300-N)       | /1 _ 2700 K  CRI >90 2538,0 lm 141 lm/W   |
| 11/ _ _ Black<br>(NCS S 8500 N)       | /2 _ 3000 K  CRI >80 2246 lm 125 lm/W     |
| 24/ _ _ Beige M1<br>(NCS S 2005-Y50R) | /3 _ 3500 K  CRI >90 2749,8 lm 152,8 lm/W |
| 42 / _ _ Blue M1<br>(NCS S 5010-B10G) |                                           |

### Materials

Rods: Carbon fiber. Shade: Aluminum  
Diffuser: Methacrylate. Wall Plate: Steel.

### Light Source and electronics

2 x LED 9 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Control


5635 \_ \_ / \_ 5  
Push

### Packaging


4 Boxes  
Total Vol 0,18 m<sup>3</sup>  
Gross weight 14,6 Kg Net weight 7,3 Kg

### Notes

Push-button on the wall plate.  
Can be connected with or without plug.  
Electric cable 2,5 m



## 5640



| Finishes                              | LED temperature colour                |
|---------------------------------------|---------------------------------------|
| 10/ _ _ White<br>(NCS S 0300-N)       | /1 _ 2700 K  CRI >90 1269 lm 141 lm/W |
| 11/ _ _ Black<br>(NCS S 8500 N)       |                                       |
| 24/ _ _ Beige M1<br>(NCS S 2005-Y50R) |                                       |
| 42 / _ _ Blue M1<br>(NCS S 5010-B10G) |                                       |

### Materials

Diffuser: Methacrylate. Shade: Aluminum.  
Wall Plate: Steel.

### Light Source and electronics

1 x LED 9W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### Control

5640 \_ \_ / \_ 5  
Push



### Packaging

2 Boxes  
Total Vol 0,04 m<sup>3</sup>  
Gross weight 5,2 Kg Net weight 2,75 Kg

### Notes


Push-button on the wall plate.  
Can be connected with or without plug.  
Electric cable 2,5 m



|      |                                                                                     |                                                                                                                                                                                                   |                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                       |
|------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5642 |    | <b>Finishes</b><br>● 10/ _ _ White<br>(NCS S 0300-N)<br>● 11/ _ _ Black<br>(NCS S 8500 N)<br>● 24/ _ _ Beige M1<br>(NCS S 2005-Y50R)<br>● 42 / _ _ Blue M1<br>(NCS S 5010-B10G)                   | <b>LED temperature colour</b><br>/1 _ 2700 K <br>CRI >90 1269 lm 141 lm/W                                                                                                  | <b>Control</b><br><b>5642</b> _ _ / _ 5<br>Push                                                                                                                                                                                                                                                                                                                                                       |
|      |                                                                                     | <b>Materials</b><br>Diffuser: Methacrylate. Shade: Aluminum.<br>Wall Plate: Steel.<br><br><b>Light Source and electronics</b><br>1 x LED 9W 350 mA<br>Constant Current 350 mA<br>110~240V 50/60Hz | <b>Packaging</b><br>2 Boxes<br>Total Vol 0,12 m³<br>Gross weight 7,7 Kg Net weight 3,75 Kg<br><br><b>Notes</b><br>Push-button on the wall plate.<br>Length of light electric cable 10 m.<br>Can be connected with or without plug.<br>Electric cable 2,5 m  | <div>LED  IP20  EAC </div> <div>Dimmer  Bi-volt</div>         |
| 5644 |  | <b>Finishes</b><br>● 10/ _ _ White<br>(NCS S 0300-N)<br>● 11/ _ _ Black<br>(NCS S 8500 N)<br>● 24/ _ _ Beige M1<br>(NCS S 2005-Y50R)<br>● 42 / _ _ Blue M1<br>(NCS S 5010-B10G)                   | <b>LED temperature colour</b><br>/1 _ 2700 K <br>CRI >90 1269 lm 141 lm/W                                                                                                | <b>Control</b><br><b>5644</b> _ _ / _ 5<br>Push                                                                                                                                                                                                                                                                                                                                                       |
|      |                                                                                     | <b>Materials</b><br>Diffuser: Methacrylate. Shade: Aluminum.<br>Wall Plate: Steel.<br><br><b>Light Source and electronics</b><br>1 x LED 9W 350 mA<br>Constant Current 350 mA<br>110~240V 50/60Hz | <b>Packaging</b><br>2 Boxes<br>Total Vol 0,20 m³<br>Gross weight 9,15 Kg Net weight 4,45 Kg<br><br><b>Notes</b><br>Push-button on the wall plate.<br>Length of light electric cable 10 m.<br>Can be connected with or without plug.<br>Electric cable 2,5 m | <div>LED  IP20  EAC </div> <div>Dimmer  Bi-volt</div> |



Height-adjustable shade.

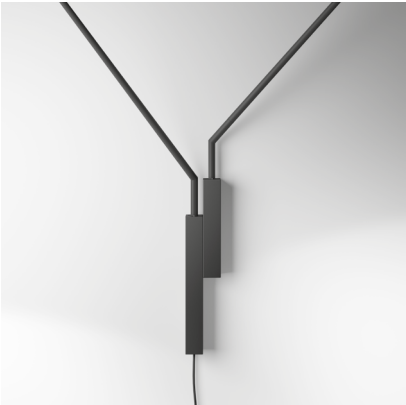

Can be connected with or without plug.





Pendants



5660



5662



5664



5670



5672




5674



Height-adjustable shade.



## 5660



- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500 N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_ \_ Blue M1 (NCS S 5010-B10G)

**Finish customization**  
(Available options:  
Vibia colour palette)

### Materials

Shade: Aluminum  
Diffuser: Methacrylate. Canopy: Steel.

### Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### LED temperature colour

- /1 \_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2 \_ 3000 K CRI >80 1123 lm 125 lm/W
- /3 \_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

### Control

- 5660 \_ \_ / \_ 1 DALI-2
- 5660 \_ \_ / \_ B 1-10V, Push
- 5660 \_ \_ / \_ Z Casambi

### Packaging

1 Box 0,24 x 0,217 x 0,217 m  
Vol 0,01 m<sup>3</sup>  
Gross weight 2,3 Kg Net weight 1,25 Kg


### Notes

Extra cable length. 16,00 €/m

### Electrical connection

- Surface
- \_18 Free Wire
- \_23 Built-in
- \_31 Remote Micro for plaster ceilings
- \_32 Remote XXS for all types of drop ceilings

## 5662



- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500 N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_ \_ Blue M1 (NCS S 5010-B10G)

**Finish customization**  
(Available options:  
Vibia colour palette)

### Materials

Shade: Aluminum  
Diffuser: Methacrylate. Canopy: Steel.

### Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### LED temperature colour

- /1 \_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2 \_ 3000 K CRI >80 1123 lm 125 lm/W
- /3 \_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

### Control

- 5662 \_ \_ / \_ 1 DALI-2
- 5662 \_ \_ / \_ B 1-10V, Push
- 5662 \_ \_ / \_ Z Casambi

### Packaging

1 Box 0,36 x 0,537 x 0,537 m  
Vol 0,10 m<sup>3</sup>  
Gross weight 4,8 Kg Net weight 2,25 Kg


### Notes

Extra cable length. 16,00 €/m

### Electrical connection

- Surface
- \_18 Free Wire
- \_23 Built-in
- \_31 Remote Micro for plaster ceilings
- \_32 Remote XXS for all types of drop ceilings

## 5664



- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500 N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_ \_ Blue M1 (NCS S 5010-B10G)

**Finish customization**  
(Available options:  
Vibia colour palette)

### Materials

Shade: Aluminum  
Diffuser: Methacrylate. Canopy: Steel.

### Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

### LED temperature colour

- /1 \_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2 \_ 3000 K CRI >80 1123 lm 125 lm/W
- /3 \_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

### Control

- 5664 \_ \_ / \_ 1 DALI-2
- 5664 \_ \_ / \_ B 1-10V, Push
- 5664 \_ \_ / \_ Z Casambi

### Packaging

1 Box 0,32 x 0,727 x 0,727 m  
Vol 0,17 m<sup>3</sup>  
Gross weight 6,25 Kg Net weight 2,95 Kg


### Notes

Extra cable length. 16,00 €/m

### Electrical connection

- Surface
- \_18 Free Wire
- \_23 Built-in
- \_31 Remote Micro for plaster ceilings
- \_32 Remote XXS for all types of drop ceilings

## 5670



## Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500 N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_ Blue M1 (NCS S 5010-B10G)

## LED temperature colour

- /1 \_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2 \_ 3000 K CRI >80 1123 lm 125 lm/W
- /3 \_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

## Control

5670 \_ \_ / \_ 1  
DALI-2

5670 \_ \_ / \_ B  
1-10V, Push

5670 \_ \_ / \_ Z  
Casambi

## Materials

Rods: Carbon fiber. Shade: Aluminum  
Diffuser: Methacrylate. Canopy: Steel.

## Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz


## Packaging

2 Boxes  
Total Vol 0,06 m³  
Gross weight 5,75 Kg Net weight 2 Kg

## Notes

Extra cable length. 16,00 €/m

## 5672



## Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500 N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_ Blue M1 (NCS S 5010-B10G)

## LED temperature colour

- /1 \_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2 \_ 3000 K CRI >80 1123 lm 125 lm/W
- /3 \_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

## Control

5672 \_ \_ / \_ 1  
DALI-2

5672 \_ \_ / \_ B  
1-10V, Push

5672 \_ \_ / \_ Z  
Casambi

## Materials

Rods: Carbon fiber. Shade: Aluminum  
Diffuser: Methacrylate. Canopy: Steel.

## Light Source and electronics

1 x LED 9W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz


## Packaging

2 Boxes  
Total Vol 0,14 m³  
Gross weight 8,25 Kg Net weight 3 Kg

## Notes

Extra cable length. 16,00 €/m

## 5674



## Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 11/ \_ \_ Black (NCS S 8500 N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_ Blue M1 (NCS S 5010-B10G)

## LED temperature colour

- /1 \_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2 \_ 3000 K CRI >80 1123 lm 125 lm/W
- /3 \_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

## Control

5674 \_ \_ / \_ 1  
DALI-2

5674 \_ \_ / \_ B  
1-10V, Push

5674 \_ \_ / \_ Z  
Casambi

## Materials

Rods: Carbon fiber. Shade: Aluminum  
Diffuser: Methacrylate. Canopy: Steel.

## Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,21 m³  
Gross weight 9,7 Kg Net weight 3,7 Kg


## Notes

Extra cable length. 16,00 €/m


## Composing pendants

Next sketches are composed by one or more compositions


---

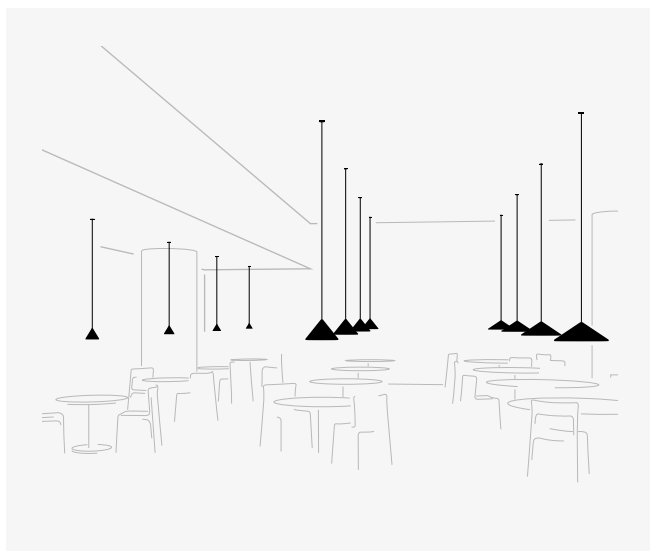

4 x 5660.  
4 x 5662.  
4 x 5664.

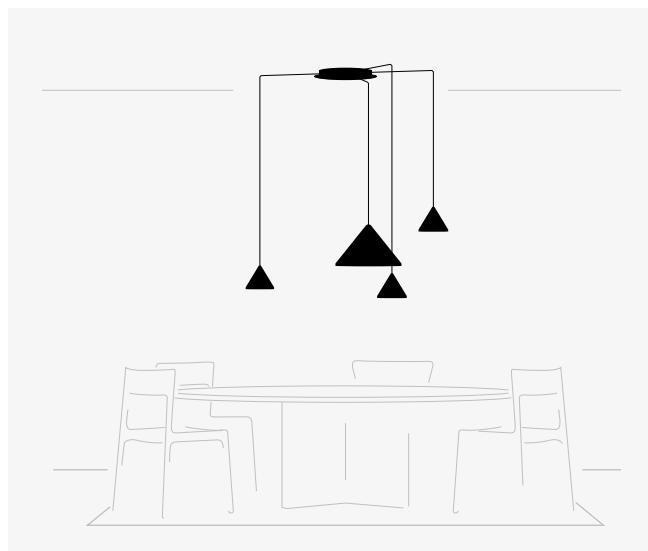

1 x 5664.  
3 x 5660.

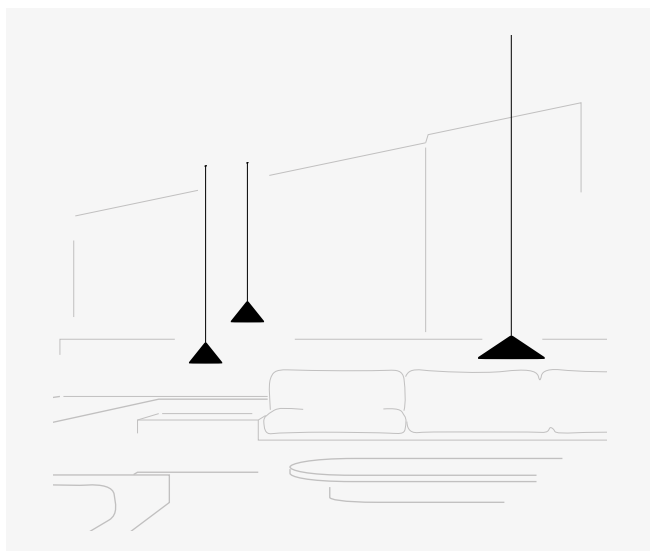

2 x 5662.  
1 x 5664.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
North composition quick  
and easy at [vibia.com](http://vibia.com)

# Electrical connection options for models 5660 / 5662 / 5664


Choose your preferred installation option  
according to your needs.  
For each composition, the optimal minimum  
number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate  
the silkiness and lightness of compositions on  
suspended ceilings, its great visual grandeur taking  
center stage.

For Ref. 5660 / 5662 / 5664

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.




## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5660 / 5662 / 5664


### Surface



ø 18 cm  
match with  
fixture finish.





### Free Wire



1 wire


ø 20 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.




2 wires

ø 22 cm



3 - 6 wires

ø 36 cm



7 - 8 wires

ø 40 cm



# Centric

Design by Ramos & Bassols

Some design objects can integrate with the architecture, influencing it by making rooms come alive.

## Ceiling Wall


5700

ø 32 cm




5710

ø 32 cm

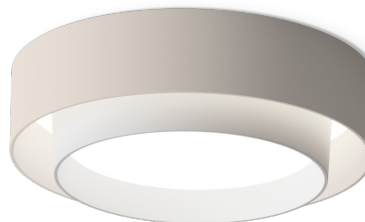

5700



### Finishes

- **58/** \_ \_ Cream  
(NCS S 2005-Y20R  
+ NCS S 0502-Y)
- **93/** \_ \_ White  
(RAL 9010 Matt)

### LED temperature colour

/1\_ 2700 K   
CRI >90 2878,0 lm 150 lm/W

### Control

**5700** \_ \_ / \_ 1  
DALI-2

**5700** \_ \_ / \_ B  
1-10V, Push

**5700** \_ \_ / \_ Z  
Casambi

### Materials

Body: ABS. Diffuser: Methacrylate.  
Canopy: Steel.

### Light Source and electronics

1 x LED PLATE 15.2W 700 mA  
2 x LED STRIP 4W 700 mA  
Constant Current 700 mA  
220~240V 50/60Hz

### Packaging

1 Box 0,2 x 0,41 x 0,41 m  
Vol 0,0336 m<sup>3</sup>  
Gross weight 3,33 Kg Net weight 2,42 Kg


### Notes

Blue diffuser included

**UNTIL STOCK RUNS OUT**

5710



### Finishes

- **58/** \_ \_ Cream  
(NCS S 2005-Y20R  
+ NCS S 0502-Y)
- **93/** \_ \_ White  
(RAL 9010 Matt)

### LED temperature colour

/1\_ 2700 K   
CRI >90 2878,0 lm 150 lm/W

### Control

**5710** \_ \_ / \_ 1  
DALI-2

**5710** \_ \_ / \_ B  
1-10V, Push

**5710** \_ \_ / \_ Z  
Casambi

### Materials

Body: ABS. Diffuser: Methacrylate.  
Canopy: Steel.

### Light Source and electronics

1 x LED PLATE 15.2W 700 mA  
2 x LED STRIP 4W 700 mA  
Constant Current 700 mA  
220~240V 50/60Hz

### Packaging

1 Box 0,2 x 0,41 x 0,41 m  
Vol 0,0336 m<sup>3</sup>  
Gross weight 3,33 Kg Net weight 2,42 Kg

### Notes

Blue diffuser included

**UNTIL STOCK RUNS OUT**





# Tempo

Design by Lievore, Altherr

Timeless character. The Tempo collection by Lievore Altherr reclaims our collective memory of light, making it contemporary through its most essential expression. Shades with an architectonic profile recreate different ambiances bringing them right up-to-date with new additions and uses.

---

## Wall



5756 5757



5758 5759



5760 5761




5762 5763



5764 5765



5766 5767




Ref.  
5757, 5759, 5761, 5763, 5765, 5767.  
Recessed dimmable driver.



Ref.  
5756, 5758, 5760, 5762, 5764, 5766.  
Push dimmer on the cable.  
With plug.

## 5756



| Finishes                               | LED temperature colour              |
|----------------------------------------|-------------------------------------|
| 18/ _ _ Graphite<br>(ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ _ Terra Red<br>(NCS S 4040-Y70R) |                                     |
| 58/ _ _ Cream<br>(RAL 7044)            |                                     |
| 62/ _ _ Green<br>(NCS S 3010-G20Y)     |                                     |

**Materials**  
Diffuser: Blown-glass. LED support: Aluminum.  
Structures: Steel. Shade: Aluminum.

**Light Source and electronics**  
1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz


**Control**  
5756 \_ \_ / \_ 5  
Push

**Packaging**  
2 Boxes  
Total Vol 0,082 m³  
Gross weight 4,3 Kg Net weight 2,5 Kg

**Notes**  
Push dimmer on the cable. With plug (4 m)

LED IP20 EAC Dimmer

## 5757



| Finishes                               | LED temperature colour              |
|----------------------------------------|-------------------------------------|
| 18/ _ _ Graphite<br>(ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ _ Terra Red<br>(NCS S 4040-Y70R) |                                     |
| 58/ _ _ Cream<br>(RAL 7044)            |                                     |
| 62/ _ _ Green<br>(NCS S 3010-G20Y)     |                                     |

**Materials**  
Diffuser: Blown-glass. LED support: Aluminum.  
Structures: Steel. Shade: Aluminum.

**Light Source and electronics**  
1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

**Control**  
5757 \_ \_ / \_ 1  
DALI-2

5757 \_ \_ / \_ B  
1-10V, Push


5757 \_ \_ / \_ Z  
Casambi

**Packaging**  
2 Boxes  
Total Vol 0,082 m³  
Gross weight 4,3 Kg Net weight 2,5 Kg

**Notes**  
Recessed dimmable driver (2,5 m)

LED IP20 EAC ø 7,5 cm

5758



#### Finishes

- **18/** \_\_ Graphite  
(ADAPTA RF9913WX)
- **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
- **58/** \_\_ Cream  
(RAL 7044)
- **62/** \_\_ Green  
(NCS S 3010-G20Y)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 415 lm 104 lm/W

#### Control

**5758** \_\_ / \_\_ 5  
Push

#### Materials

Diffuser: Blown-glass. LED support: Aluminum.  
Structures: Steel.

#### Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

#### Packaging


2 Boxes  
Total Vol 0,088 m³  
Gross weight 3,5 Kg Net weight 1,7 Kg

#### Notes

Push dimmer on the cable. With plug (4 m).

IP20

5759



#### Finishes

- **18/** \_\_ Graphite  
(ADAPTA RF9913WX)
- **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
- **58/** \_\_ Cream  
(RAL 7044)
- **62/** \_\_ Green  
(NCS S 3010-G20Y)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 415 lm 104 lm/W

#### Control

**5759** \_\_ / \_\_ 1  
DALI-2  
**5759** \_\_ / \_\_ B  
1-10V, Push  
**5759** \_\_ / \_\_ Z  
Casambi

#### Materials

Diffuser: Blown-glass. LED support: Aluminum.  
Structures: Steel.

#### Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

#### Packaging


2 Boxes  
Total Vol 0,088 m³  
Gross weight 3,5 Kg Net weight 1,7 Kg

#### Notes

Recessed dimmable driver (2,5 m)

IP20 ø 7,5 cm

5760



#### Finishes

- **18/** \_\_ Graphite  
(ADAPTA RF9913WX)
- **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
- **58/** \_\_ Cream  
(RAL 7044)
- **62/** \_\_ Green  
(NCS S 3010-G20Y)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 415 lm 104 lm/W

#### Control

**5760** \_\_ / \_\_ 5  
Push

#### Materials

Diffuser: Blown-glass. LED support: Aluminum.  
Structures: Steel.

#### Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

#### Packaging


2 Boxes  
Total Vol 0,088 m³  
Gross weight 3,7 Kg Net weight 1,9 Kg

#### Notes

Push dimmer on the cable. With plug (4 m)

IP20

5761



#### Finishes

- **18/** \_\_ Graphite  
(ADAPTA RF9913WX)
- **37/** \_\_ Terra Red  
(NCS S 4040-Y70R)
- **58/** \_\_ Cream  
(RAL 7044)
- **62/** \_\_ Green  
(NCS S 3010-G20Y)

#### LED temperature colour

/1\_ 2700 K   
CRI >90 415 lm 104 lm/W

#### Control

**5761** \_\_ / \_\_ 1  
DALI-2  
**5761** \_\_ / \_\_ B  
1-10V, Push  
**5761** \_\_ / \_\_ Z  
Casambi

#### Materials

Diffuser: Blown-glass. LED support: Aluminum.  
Structures: Steel.

#### Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

#### Packaging


2 Boxes  
Total Vol 0,088 m³  
Gross weight 3,7 Kg Net weight 1,9 Kg

#### Notes

Recessed dimmable driver (2,5 m)

IP20 ø 7,5 cm

## 5762



| Finishes                          | LED temperature colour                                                                                               |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|
| 18/ _ Graphite (ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ Terra Red (NCS S 4040-Y70R) |                                                                                                                      |
| 58/ _ Cream (RAL 7044)            |                                                                                                                      |
| 62/ _ Green (NCS S 3010-G20Y)     |                                                                                                                      |

### Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum

### Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Control

5762 \_ / \_ 5  
Push

### Packaging


2 Boxes  
Total Vol 0,088 m³  
Gross weight 3,2 Kg Net weight 2 Kg

### Notes

Push dimmer on the cable. With plug (4 m)

## 5763



| Finishes                          | LED temperature colour                                                                                               |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|
| 18/ _ Graphite (ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ Terra Red (NCS S 4040-Y70R) |                                                                                                                      |
| 58/ _ Cream (RAL 7044)            |                                                                                                                      |
| 62/ _ Green (NCS S 3010-G20Y)     |                                                                                                                      |

### Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum

### Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Control

5763 \_ / \_ 1  
DALI-2  
5763 \_ / \_ B  
1-10V, Push  
5763 \_ / \_ Z  
Casambi

### Packaging


2 Boxes  
Total Vol 0,088 m³  
Gross weight 3,2 Kg Net weight 2 Kg

### Notes

Recessed dimmable driver (2,5 m)

      ø 7,5 cm

## 5764



| Finishes                          | LED temperature colour                                                                                                 |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 18/ _ Graphite (ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ Terra Red (NCS S 4040-Y70R) |                                                                                                                        |
| 58/ _ Cream (RAL 7044)            |                                                                                                                        |
| 62/ _ Green (NCS S 3010-G20Y)     |                                                                                                                        |

### Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel.

### Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Control

5764 \_ / \_ 5  
Push

### Packaging


2 Boxes  
Total Vol 0,088 m³  
Gross weight 2,45 Kg Net weight 1,25 Kg

### Notes

Push dimmer on the cable. With plug (4 m)

## 5765



| Finishes                          | LED temperature colour                                                                                                 |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 18/ _ Graphite (ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ Terra Red (NCS S 4040-Y70R) |                                                                                                                        |
| 58/ _ Cream (RAL 7044)            |                                                                                                                        |
| 62/ _ Green (NCS S 3010-G20Y)     |                                                                                                                        |

### Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel.

### Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

### Control

5765 \_ / \_ 1  
DALI-2  
5765 \_ / \_ B  
1-10V, Push  
5765 \_ / \_ Z  
Casambi


### Packaging

2 Boxes  
Total Vol 0,088 m³  
Gross weight 2,45 Kg Net weight 1,25 Kg

### Notes

Recessed dimmable driver (2,5 m)

      ø 7,5 cm



5766

Finishes

18/ \_ \_ Graphite

(ADAPTA RF9913WX)

37/ \_ \_ Terra Red

(NCS S 4040-Y70R)

58/ \_ \_ Cream

(RAL 7044)

62/ \_ \_ Green

(NCS S 3010-G20Y)

LED temperature colour

/1\_ 2700 K

CRI >90 415 lm 104 lm/W

Control

5766 \_ \_ / \_ 5

Push

Materials

Diffuser: Blown-glass. LED support: Aluminum.  
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,088 m³  
Gross weight 2,65 Kg Net weight 1,45 Kg

Notes


Push dimmer on the cable. With plug (4 m)

LED

IP20

EAC

Dimmer



5767

Finishes

18/ \_ \_ Graphite

(ADAPTA RF9913WX)

37/ \_ \_ Terra Red

(NCS S 4040-Y70R)

58/ \_ \_ Cream

(RAL 7044)

62/ \_ \_ Green

(NCS S 3010-G20Y)

LED temperature colour

/1\_ 2700 K

CRI >90 415 lm 104 lm/W

Control

5767 \_ \_ / \_ 1

DALI-2

5767 \_ \_ / \_ B

1-10V, Push

5767 \_ \_ / \_ Z

Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.  
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
220~240V 50/60Hz

Packaging

2 Boxes  
Total Vol 0,088 m³  
Gross weight 2,65 Kg Net weight 1,45 Kg

Notes

Recessed dimmable driver (2,5 cm)

LED

IP20

EAC

ø 7,5 cm

286 Product specifications subject to change without notice. Please check [vibia.com](http://vibia.com) for updated information.

## Pendants



ø 25 cm

**5770**




ø 13 cm

**5772**



ø 20,5 cm

**5774**

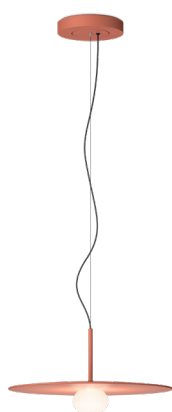


ø 40 cm

**5776**



ø 24 cm

**5778**

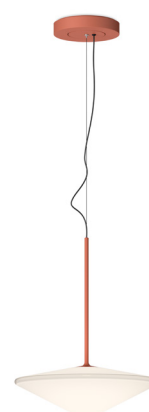


ø 34,5 cm

**5780**



5770



- Finishes
- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 58/ \_ \_ Cream (RAL 7044)
  - 62/ \_ \_ Green (NCS S 3010-G20Y)
- LED temperature colour
- /1\_ 2700 K  CRI >90 415 lm 104 lm/W

Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

Control

5770 \_ \_ / \_ 1  
DALI-2

5770 \_ \_ / \_ B  
1-10V, Push

5770 \_ \_ / \_ Z  
Casambi

Packaging

1 Box 0,28 x 0,26 x 0,13 m  
Vol 0,01 m³  
Gross weight 2,5 Kg Net weight 2 Kg

Notes

Extra cable length. 16,00 €/m

     Bi-volt

Electrical connection

Surface


\_18 Free Wire

\_23 Built-in

\_31 Remote Micro for plaster ceilings

\_32 Remote XXS for all types of drop ceilings

5772



- Finishes
- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 58/ \_ \_ Cream (RAL 7044)
  - 62/ \_ \_ Green (NCS S 3010-G20Y)
- LED temperature colour
- /1\_ 2700 K  CRI >90 415 lm 104 lm/W

Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

Control

5772 \_ \_ / \_ 1  
DALI-2

5772 \_ \_ / \_ B  
1-10V, Push

5772 \_ \_ / \_ Z  
Casambi

Packaging

1 Box 0,28 x 0,2 x 0,27 m  
Vol 0,015 m³  
Gross weight 1,8 Kg Net weight 1,2 Kg

Notes

Extra cable length. 16,00 €/m

     Bi-volt

Electrical connection

Surface


\_18 Free Wire

\_23 Built-in

\_31 Remote Micro for plaster ceilings

\_32 Remote XXS for all types of drop ceilings

5774



- Finishes
- 18/ \_ \_ Graphite (ADAPTA RF9913WX)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 58/ \_ \_ Cream (RAL 7044)
  - 62/ \_ \_ Green (NCS S 3010-G20Y)
- LED temperature colour
- /1\_ 2700 K  CRI >90 415 lm 104 lm/W

Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

Control

5774 \_ \_ / \_ 1  
DALI-2

5774 \_ \_ / \_ B  
1-10V, Push

5774 \_ \_ / \_ Z  
Casambi

Packaging

1 Box 0,28 x 0,2 x 0,27 m  
Vol 0,015 m³  
Gross weight 2 Kg Net weight 1,4 Kg

Notes

Extra cable length. 16,00 €/m

     Bi-volt

Electrical connection

Surface


\_18 Free Wire

\_23 Built-in

\_31 Remote Micro for plaster ceilings

\_32 Remote XXS for all types of drop ceilings

5776



| Finishes                          | LED temperature colour              |
|-----------------------------------|-------------------------------------|
| 18/ _ Graphite (ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ Terra Red (NCS S 4040-Y70R) |                                     |
| 58/ _ Cream (RAL 7044)            |                                     |
| 62/ _ Green (NCS S 3010-G20Y)     |                                     |

Control

5776 \_ / \_ 1

DALI-2

5776 \_ / \_ B

1-10V, Push

5776 \_ / \_ Z

Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz


Packaging

1 Box 0,45 x 0,45 x 0,12 m  
Vol 0,023 m³  
Gross weight 5,5 Kg Net weight 4 Kg

Notes

Extra cable length. 16,00 €/m

5778



| Finishes                          | LED temperature colour              |
|-----------------------------------|-------------------------------------|
| 18/ _ Graphite (ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ Terra Red (NCS S 4040-Y70R) |                                     |
| 58/ _ Cream (RAL 7044)            |                                     |
| 62/ _ Green (NCS S 3010-G20Y)     |                                     |

Control

5778 \_ / \_ 1

DALI-2

5778 \_ / \_ B

1-10V, Push

5778 \_ / \_ Z

Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum. Structure: Steel. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz


Packaging

1 Box 0,33 x 0,33 x 0,42 m  
Vol 0,045 m³  
Gross weight 4 Kg Net weight 2,5 Kg

Notes

Extra cable length. 16,00 €/m

5780



| Finishes                          | LED temperature colour              |
|-----------------------------------|-------------------------------------|
| 18/ _ Graphite (ADAPTA RF9913WX)  | /1_ 2700 K  CRI >90 415 lm 104 lm/W |
| 37/ _ Terra Red (NCS S 4040-Y70R) |                                     |
| 58/ _ Cream (RAL 7044)            |                                     |
| 62/ _ Green (NCS S 3010-G20Y)     |                                     |

Control

5780 \_ / \_ 1

DALI-2

5780 \_ / \_ B

1-10V, Push

5780 \_ / \_ Z

Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

Packaging

1 Box 0,41 x 0,41 x 0,23 m  
Vol 0,038 m³  
Gross weight 4 Kg Net weight 2,5 Kg


Notes

Extra cable length. 16,00 €/m


# Composing pendants

Next sketches are composed by one or more compositions


---

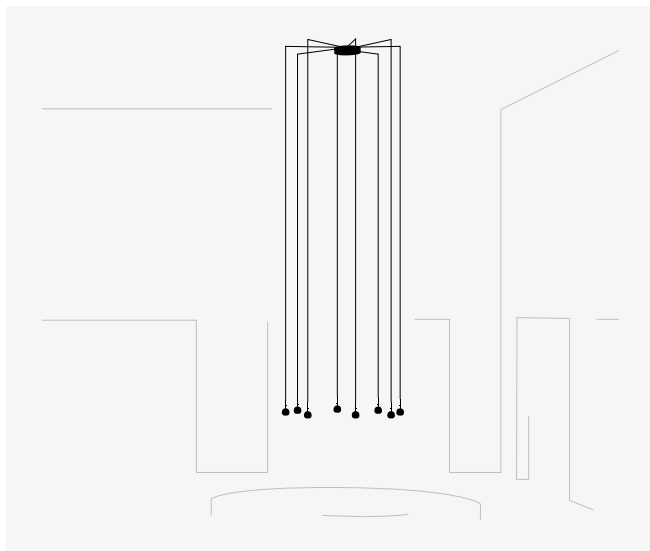

8 x 5772.

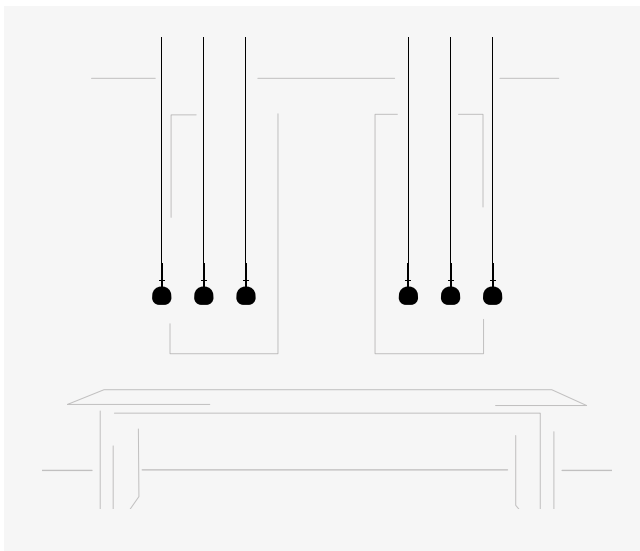

6 x 5772.

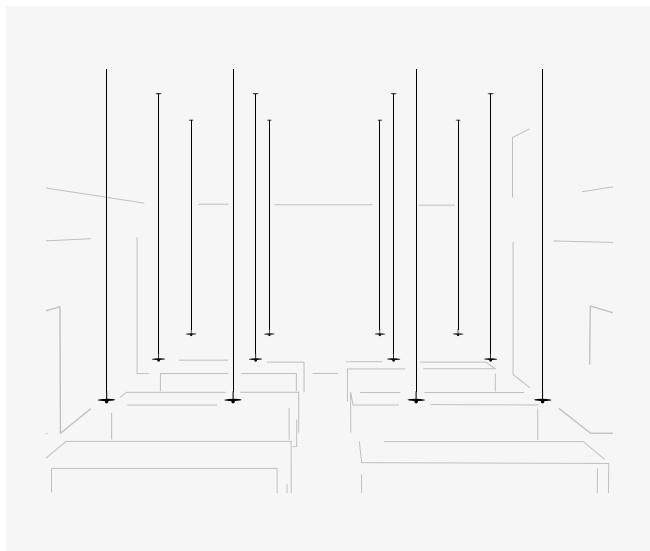

12 x 5770.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Tempo composition quick  
and easy at [vibia.com](http://vibia.com)



# Electrical connection options for models 5770 / 5772 / 5774


Choose your preferred installation option  
according to your needs.  
For each composition, the optimal minimum  
number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate  
the silkiness and lightness of compositions on  
suspended ceilings, its great visual grandeur taking  
center stage.

For Ref. 5770 / 5772 / 5774

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.



---

## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5770 / 5772 / 5774


### Surface



ø 16 cm  
match with  
fixture finish.





### Free Wire



1 wire


ø 20 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.



2 - 6 wires

ø 36 cm



7 - 9 wires

ø 40 cm




# Flat

Design by Ichiro Iwasaki

Flat's distinctive, disc-shaped diffusers form horizontal planes of light that integrate with the surrounding architecture. A study in geometry, the collection creates layers of light that infuse a space with a soothing, Zen sensitivity.

---

## Ceiling



ø 40 cm

**5920**



ø 55 cm

**5915**



ø 90 cm

**5926**




101 x 88 cm

**5905**



106 x 90 cm

**5910**

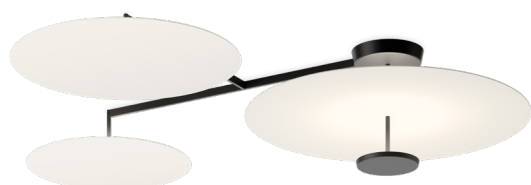

178 x 149 cm

**5922**




186 x 149 cm

**5924**



## 5905



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 71/ \_ \_ White, Green L1, Grey L1 (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

### LED temperature colour

- /1 \_ 2700 K CRI >90 5906,88 lm 109 lm/W
- /3 \_ 3500 K CRI >90 6344,4 lm 117,5 lm/W

### Control

5905 \_ \_ / \_ A  
DALI-2, 1-10V, Push

### Materials

Shade: Aluminum. Diffuser: Polycarbonate.  
Structures: Steel. Canopy: Aluminum.

### Light Source and electronics

4 x LED PLATE 13,5 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz


### Packaging

1 Box 0,75 x 0,45 x 0,25 m  
Vol 0,0844 m<sup>3</sup>  
Gross weight 17,15 Kg Net weight 15,38 Kg

### Notes

\* Electrical connection point

## 5910



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 72/ \_ \_ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
- 73/ \_ \_ White, Grey L1 (S 0300-N, NCS S 1000-N)

### LED temperature colour

- /1 \_ 2700 K CRI >90 4430,16 lm 109 lm/W
- /3 \_ 3500 K CRI >90 4758,3 lm 117,5 lm/W

### Control

5910 \_ \_ / \_ A  
DALI-2, 1-10V, Push

### Materials

Shade: Aluminum. Diffuser: Polycarbonate.  
Structures: Steel. Canopy: Aluminum.

### Light Source and electronics

3 x LED PLATE 13,5 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz


### Packaging

1 Box 0,80 x 0,70 x 0,30 m  
Vol 0,1680 m<sup>3</sup>  
Gross weight 11,90 Kg Net weight 9,10 Kg

### Notes

\* Electrical connection point

## 5915



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)

### LED temperature colour

- /1 \_ 2700 K CRI >90 2953,44 lm 109 lm/W
- /3 \_ 3500 K CRI >90 3172,2 lm 117,5 lm/W

### Control

5915 \_ \_ / \_ A  
DALI-2, 1-10V, Push

### Materials

Shade: Aluminum. Diffuser: Polycarbonate.  
Structures: Steel. Canopy: Aluminum.

### Light Source and electronics


2 x LED PLATE 13,5 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

### Packaging


1 Box 0,65 x 0,65 x 0,25 m  
Vol 0,0106 m<sup>3</sup>  
Gross weight 6,80 Kg Net weight 4,73 Kg

### Notes

\* Electrical connection point

|                                                                                                   |                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>5920</div>  | <div>Finishes</div> <div><div><div></div></div>10/ _ _ White<br/>(NCS S 0300-N)</div> <div><div></div></div> 13/ _ _ Off-White<br>(NCS S 1000-N) |
|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|

5926



**Finishes**  
 10/ \_ \_ White  
 (NCS S 0300-N)

**LED temperature colour**  
 /1 \_ 2700 K **D**  
 CRI >90 6598,18 lm 132 lm/W  
 /3 \_ 3500 K **E**  
 CRI >90 7086,9 lm 141,7 lm/W

**Control**  
 5926 \_ \_ / \_ A  
 DALI-2, 1-10V, Push

**Materials**  
 Shade: Aluminum. Diffuser: Polycarbonate.  
 Structures: Steel. Canopy: Aluminum.

**Light Source and electronics**  
 2 x LED PLATE 25 W 700 mA  
 Constant Current 700 mA  
 110~240V 50/60Hz


**Packaging**  
 1 Box 1,05 x 1,05 x 0,25 m  
 Vol 0,0276 m<sup>3</sup>  
 Gross weight 14,60 Kg Net weight 10,08 Kg

**Notes**  
 \* Electrical connection point

LED IP20 CE Dimmer



Pendants

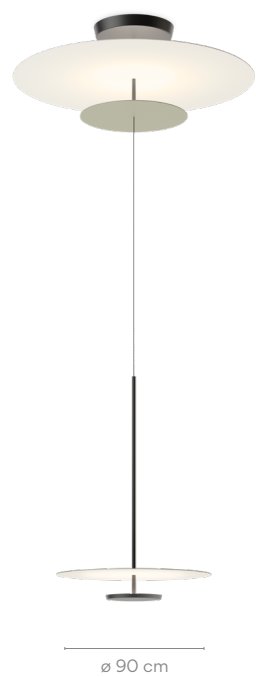

5930




5935



5940

5930

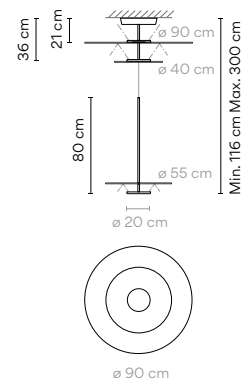

Finishes

- 13/ Off-White (NCS S 1000-N)
- 37/ Terra Red (NCS S 4040-Y70R)
- 47/ Green L1 (NCS S 4005-G80Y)

LED temperature colour

- /1 2700 K CRI >90 9897,27 lm 132 lm/W
- /3 3500 K CRI >90 10630,4 lm 141,7 lm/W

Control

- 5930 / A DALI, 1-10V, Push
- 5930 / Z Casambi

Materials

Shade: Aluminum Diffuser: Polycarbonate.  
Structures: Steel. Canopy: Aluminum

Light Source and electronics

3 x LED PLATE 25 W 700mA  
Constant Current 700 mA  
110-240V 50/60Hz

Packaging

1 Box 0,96x0,96x0,50 m  
Vol 0,4608 m³  
Gross weight 19 Kg Net weight 10,5 Kg


Notes

Adjust the height on installation

LED IP20 CE Dimmer



## 5935



| Finishes                            | LED temperature colour                    |
|-------------------------------------|-------------------------------------------|
| 13/ _ _ Off-White (NCS S 1000-N)    | /1 _ 2700 K  CRI >90 1740 lm 129 lm/W     |
| 37/ _ _ Terra Red (NCS S 4040-Y70R) | /3 _ 3500 K  CRI >90 1868,9 lm 138,4 lm/W |
| 47/ _ _ Green L1 (NCS S 4005-G80Y)  |                                           |

### Materials

Shade: Aluminum Diffuser: Polycarbonate.  
Structures: Steel. Canopy: Aluminum

### Light Source and electronics

1 x LED PLATE 13,5 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

### Control

5935 \_ \_ / \_ 1  
DALI

5935 \_ \_ / \_ B  
1-10V, Push

### Packaging

1 Box 0,45 x 0,80 x 0,20 m  
Vol 0,0072 m³  
Gross weight 6,10 Kg Net weight 5 Kg


### Notes

Extra cable length. 16,00 €/m

### Electrical connection

Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote Micro for plaster ceilings  
\_32 Remote XXS for all types of drop ceilings

## 5940



| Finishes                            | LED temperature colour                    |
|-------------------------------------|-------------------------------------------|
| 13/ _ _ Off-White (NCS S 1000-N)    | /1 _ 2700 K  CRI >90 1740 lm 129 lm/W     |
| 37/ _ _ Terra Red (NCS S 4040-Y70R) | /3 _ 3500 K  CRI >90 1868,9 lm 138,4 lm/W |
| 47/ _ _ Green L1 (NCS S 4005-G80Y)  |                                           |

### Materials

Shade: Aluminum Diffuser: Polycarbonate.  
Structures: Steel. Canopy: Aluminum

### Light Source and electronics

1 x LED PLATE 13,5 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

### Control

5940 \_ \_ / \_ 1  
DALI

5940 \_ \_ / \_ B  
1-10V, Push

### Packaging


1 Box 0,65 x 0,85 x 0,20 m  
Vol 0,0111 m³  
Gross weight 7 Kg Net weight 6 Kg

### Notes


Extra cable length. 16,00 €/m

# Composing pendants


Next sketches are composed by one or more compositions

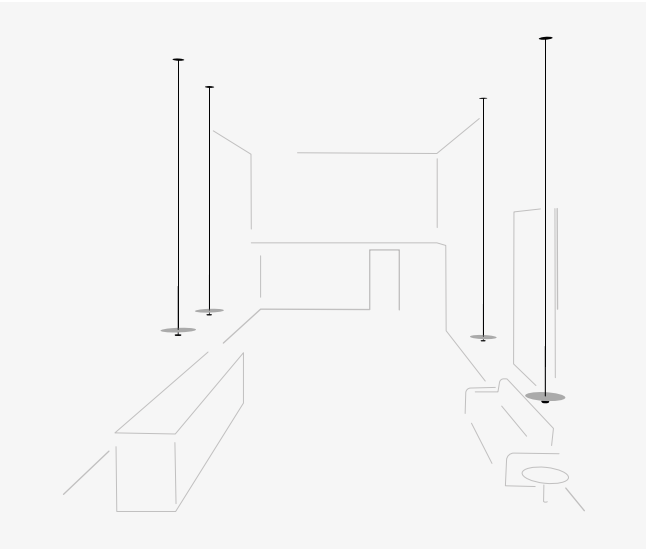


4 x 5935.

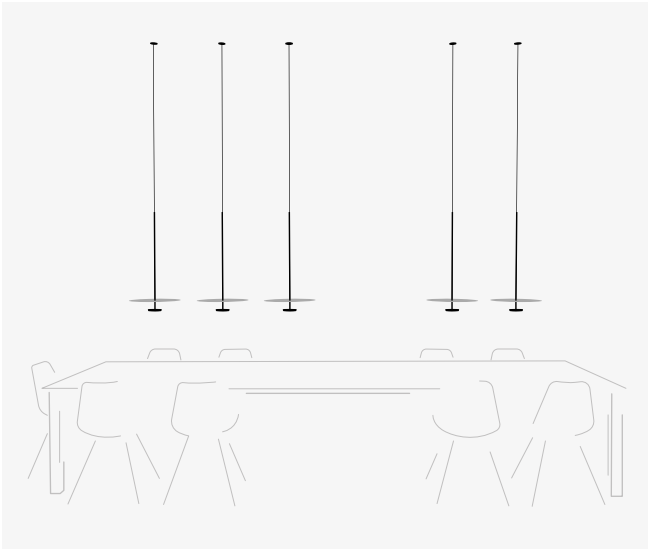


5 x 5935.

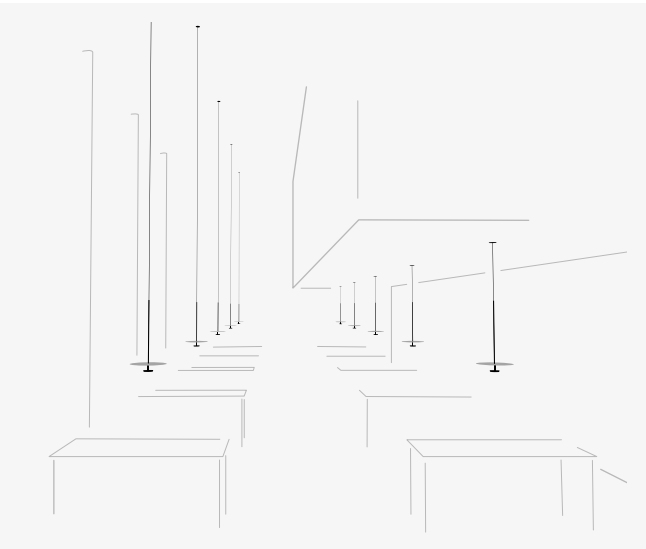

10 x 5935..

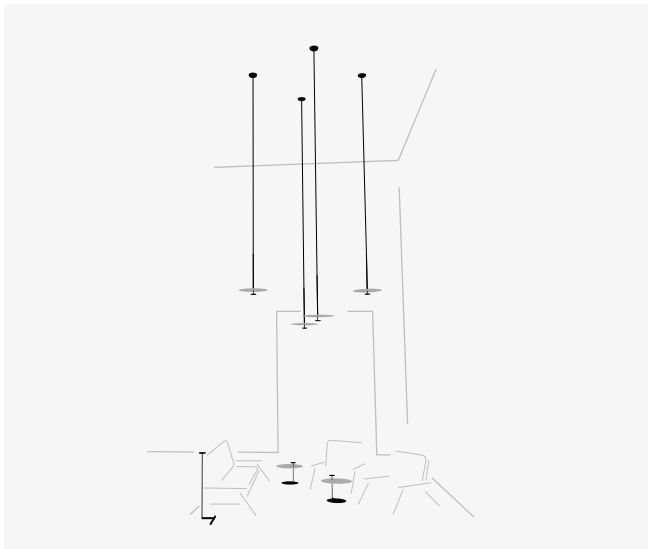


4 x 5935.

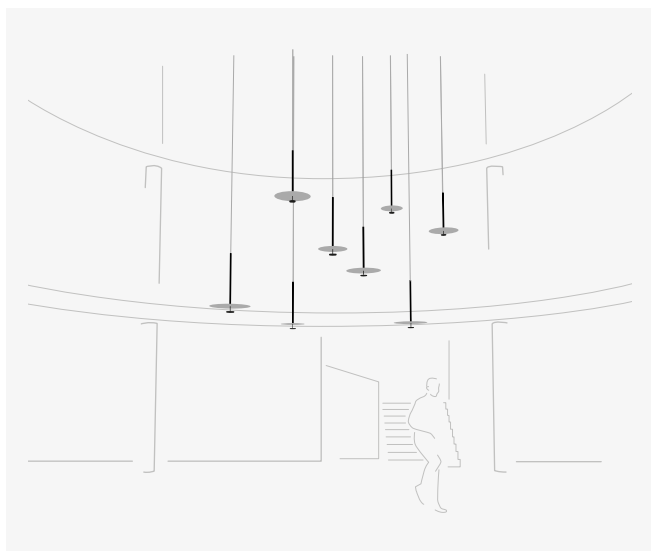

8 x 5935.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Flat composition quick  
and easy at [vibia.com](http://vibia.com)

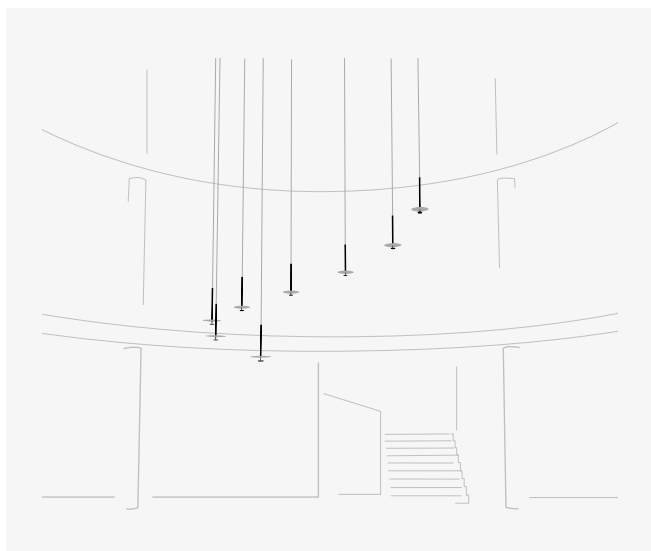

8 x 5935.



# Electrical connection options for model 5935


Choose your preferred installation option according to your needs.  
For each composition, the optimal minimum number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 5935

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.



## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5935


### Surface



ø 16,7 cm  
match with  
fixture finish.




### Free Wire



1 wire


ø 20 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.




2 - 3 wires

ø 22 cm




4 - 6 wires

ø 36 cm



7 - 9 wires


ø 40 cm



Floor




5945



|                                                                                                                   |                                                                                                                           |                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Finishes</b><br>● <b>13/</b> _ _ Off-White<br>(NCS S 1000-N)<br>● <b>47/</b> _ _ Green L1<br>(NCS S 4005-G80Y) | <b>LED temperature colour</b><br>/1 _ 2700 K<br>CRI >90 1365,8 lm 98 lm/W<br>/3 _ 3500 K<br>CRI >90 1467,0 lm 104,8 lm/W  | <b>Control</b><br><b>5945</b> _ _ / _ 5<br>Push                                                              |
| <b>Materials</b><br>Shade: Aluminum.<br>Diffuser: Polycarbonate. Structures: Steel.                               | <b>Light Source and electronics</b><br>2 x LED PLATE 7 W 400 mA<br><b>Driver</b> Constant Voltage 24V<br>110-240V 50/60Hz | <b>Packaging</b><br>1 Box 0,65 x 1,00 x 0,25 m<br>Vol 0,0163 m³<br>Gross weight 15,85 Kg Net weight 15,25 Kg |
| <b>Notes</b><br>Electric cable 2 m                                                                                |                                                                                                                           |                                                                                                              |
|                                                                                                                   |                                                                                                                           |                                                                                                              |


5950



|                                                                                     |                                                                                                                           |                                                                                                              |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Finishes</b><br>● <b>10/</b> _ _ White<br>(NCS S 0300-N)                         | <b>LED temperature colour</b><br>/1 _ 2700 K<br>CRI >90 682,9 lm 98 lm/W<br>/3 _ 3500 K<br>CRI >90 733,5 lm 104,8 lm/W    | <b>Control</b><br><b>5950</b> _ _ / _ 5<br>Push                                                              |
| <b>Materials</b><br>Shade: Aluminum.<br>Diffuser: Polycarbonate. Structures: Steel. | <b>Light Source and electronics</b><br>1 x LED PLATE 7 W 400 mA<br><b>Driver</b> Constant Voltage 24V<br>110-240V 50/60Hz | <b>Packaging</b><br>1 Box 0,65 x 0,65 x 0,20 m<br>Vol 0,0085 m³<br>Gross weight 14,60 Kg Net weight 12,71 Kg |
| <b>Notes</b><br>Electric cable 2 m                                                  |                                                                                                                           |                                                                                                              |
|                                                                                     |                                                                                                                           |                                                                                                              |



## 5955



|                                                |                                                   |
|------------------------------------------------|---------------------------------------------------|
| <b>Finishes</b>                                | <b>LED temperature colour</b>                     |
| ● <b>11/</b> __ Black<br>(NCS S 8500-N)        | <b>/1</b> _ 2700 K<br>CRI >90 682,9 lm 98 lm/W    |
| ● <b>37/</b> __ Terra Red<br>(NCS S 4040-Y70R) | <b>/3</b> _ 3500 K<br>CRI >90 733,5 lm 104,8 lm/W |
| ● <b>47/</b> __ Green L1<br>(NCS S 4005-G80Y)  |                                                   |

### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate. Structures: Steel.

### Light Source and electronics

1 x LED PLATE 7 W 400 mA  
**Driver** Constant Voltage 24V  
110~240V 50/60Hz

### Control

**5955** \_\_ / \_ 5  
Push


### Packaging

1 Box 0,30 x 1,10 x 0,10 m  
Vol 0,0033 m<sup>3</sup>  
Gross weight 4,80 Kg Net weight 3,50 Kg

### Notes

Electric cable 2 m

## 5957



|                                                |                                                   |
|------------------------------------------------|---------------------------------------------------|
| <b>Finishes</b>                                | <b>LED temperature colour</b>                     |
| ● <b>37/</b> __ Terra Red<br>(NCS S 4040-Y70R) | <b>/1</b> _ 2700 K<br>CRI >90 682,9 lm 98 lm/W    |
| ● <b>47/</b> __ Green L1<br>(NCS S 4005-G80Y)  | <b>/3</b> _ 3500 K<br>CRI >90 733,5 lm 104,8 lm/W |

### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate. Structures: Steel.

### Light Source and electronics

1 x LED PLATE 7 W 400 mA  
Constant Voltage 24V  
110~240V 50/60Hz

### Control

**5957** \_\_ / \_ 5  
Push

### Packaging


1 Box 0,40 x 1,10 x 0,10 m  
Vol 0,0044 m<sup>3</sup>  
Gross weight 6,10 Kg Net weight 4,46 Kg

### Notes

Electric cable 2 m

Table



|      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5965 | <div><div><div>Finishes</div><div><div><div>● 13/ _ _ Off-White</div><div>(NCS S 1000-N)</div></div><div><div>● 47/ _ _ Green L1</div><div>(NCS S 4005-G80Y)</div></div></div></div><div><div><div>LED temperature colour</div><div>/1_ 2700 K </div><div>CRI &gt;90 682,9 lm 98 lm/W</div></div></div></div> <div><div><div>Control</div><div><b>5965</b> _ _ / _ 5</div><div>Push</div></div></div>                                                                  | <div><div><div></div><div>16 cm</div></div><div><div><div>35 cm</div><div>ø 30 cm</div></div></div></div> <div><div><div>Materials</div><div>Shade: Aluminum.<br/>Diffuser: Polycarbonate. Structures: Steel.</div></div><div><div>Light Source and electronics</div><div>1 x LED PLATE 7W 400mA<br/>Constant Voltage 24V<br/>110~240V 50/60Hz</div></div></div> <div><div><div>Packaging</div><div>1 Box 0,50 x 0,50 x 0,7 m<br/>Vol 0,0018 m³<br/>Gross weight 4 Kg Net weight 3,11 Kg</div></div><div><div>Notes</div><div>Electric cable 2 m</div></div><div><div><div>LED</div><div></div><div>IP20</div><div></div><div></div><div>Dimmer</div><div>Bi-volt</div></div></div></div>                   |
| 5970 | <div><div><div>Finishes</div><div><div><div>● 11/ _ _ Black</div><div>(NCS S 8500-N)</div></div><div><div>● 37/ _ _ Terra Red</div><div>(NCS S 4040-Y70R)</div></div><div><div>● 47/ _ _ Green L1</div><div>(NCS S 4005-G80Y)</div></div></div></div><div><div><div>LED temperature colour</div><div>/1_ 2700 K </div><div>CRI &gt;90 682,9 lm 98 lm/W</div></div></div></div> <div><div><div>Control</div><div><b>5970</b> _ _ / _ 5</div><div>Push</div></div></div> | <div><div><div></div><div>30 cm</div></div><div><div><div>29 cm</div><div>ø 11 cm</div><div>17 cm</div></div></div></div> <div><div><div>Materials</div><div>Shade: Aluminum.<br/>Diffuser: Polycarbonate. Structures: Steel.</div></div><div><div>Light Source and electronics</div><div>1 x LED PLATE 7W 400mA<br/>Constant Voltage 24V<br/>110~240V 50/60Hz</div></div></div> <div><div><div>Packaging</div><div>1 Box 0,20 x 0,40 x 0,07 m<br/>Vol 0,0072 m³<br/>Gross weight 4 Kg Net weight 3,11 Kg</div></div><div><div>Notes</div><div>Electric cable 2 m</div></div><div><div><div>LED</div><div></div><div>IP20</div><div></div><div></div><div>Dimmer</div><div>Bi-volt</div></div></div></div> |





# Spa

Design by Ramos & Bassols

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for easy cleaning and seamless integration within the surrounding architecture of a variety of interiors.

## Ceiling Wall



5975




5977




5979




5981



5983

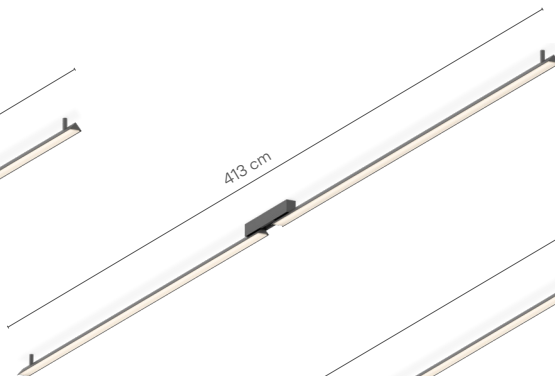


5985

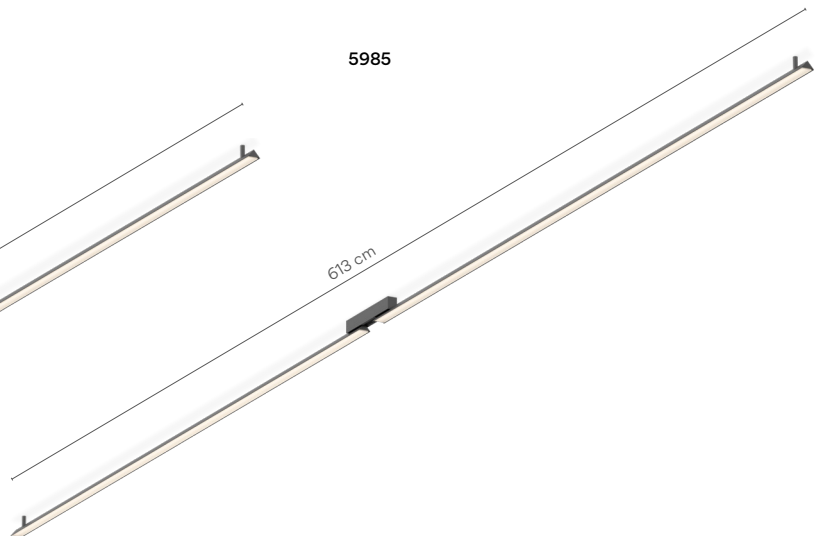





## 5975



### Finishes

- 11/ \_ \_ Black  
(NCS S 8500-N)
- 23/ \_ \_ Warm White  
(NCS S 0502-Y50R)
- 25/ \_ \_ Beige D1  
(NCS S 4005-Y50R)

### LED temperature colour

- /1\_ 2700 K CRI >90 1560 lm 144 lm/W
- /3\_ 3500 K CRI >90 1290 lm 178 lm/W

### Control

- 5975 \_ \_ / \_ 1  
DALI
- 5975 \_ \_ / \_ 3  
1-10V
- 5975 \_ \_ / \_ Z 30  
Casambi (Remote)

### Materials

Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

### Light Source and electronics


1 x LED STRIP 10,8 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz

### Packaging

1 Box 1,5 x 0,1 x 0,1 m  
Vol 0,015 m<sup>3</sup>  
Gross weight 3,1 Kg Net weight 1,6 Kg

LED IP44 EAC Dimmer

## 5977



### Finishes

- 11/ \_ \_ Black  
(NCS S 8500-N)
- 23/ \_ \_ Warm White  
(NCS S 0502-Y50R)
- 25/ \_ \_ Beige D1  
(NCS S 4005-Y50R)

### LED temperature colour

- /1\_ 2700 K CRI >90 2560 lm 119 lm/W
- /3\_ 3500 K CRI >90 3360 lm 156 lm/W

### Control

- 5977 \_ \_ / \_ 1  
DALI
- 5977 \_ \_ / \_ 3  
1-10V
- 5977 \_ \_ / \_ Z 30  
Casambi (Remote)

### Materials

Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

### Light Source and electronics


1 x LED STRIP 21,6 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz

### Packaging

1 Box 2,3 x 0,1 x 0,1 m  
Vol 0,023 m<sup>3</sup>  
Gross weight 4,9 Kg Net weight 2,6

LED IP44 EAC Dimmer

## 5979



- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
  - **25/** \_ \_ Beige D1  
(NCS S 4005-Y50R)

- LED temperature colour**
- /1\_ 2700 K CRI >90 3840 lm 119 lm/W
  - /3\_ 3500 K CRI >90 5040 lm 156 lm/W

- Control**
- 5979** \_ \_ / \_ 1  
DALI
  - 5979** \_ \_ / \_ 3  
1-10V
  - 5979** \_ \_ / \_ Z \_ 30  
Casambi (Remote)


**Materials**  
Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

**Light Source and electronics**  
1 x LED STRIP 32,4 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz

**Packaging**  
1 Box 3,3 x 0,1 x 0,1 m  
Vol 0,033 m³  
Gross weight 6,9 Kg Net weight 3,6 Kg



## 5981



- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
  - **25/** \_ \_ Beige D1  
(NCS S 4005-Y50R)

- LED temperature colour**
- /1\_ 2700 K CRI >90 3120 lm 144 lm/W
  - /3\_ 3500 K CRI >90 3840 lm 178 lm/W

- Control**
- 5981** \_ \_ / \_ 1  
DALI
  - 5981** \_ \_ / \_ 3  
1-10V
  - 5981** \_ \_ / \_ Z \_ 30  
Casambi (Remote)


**Materials**  
Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

**Light Source and electronics**  
2 x LED STRIP 10,8 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,030 m³  
Gross weight 5,8 Kg Net weight 2,8 Kg



## 5983



- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
  - **25/** \_ \_ Beige D1  
(NCS S 4005-Y50R)

- LED temperature colour**
- /1\_ 2700 K CRI >90 5120 lm 119 lm/W
  - /3\_ 3500 K CRI >90 6720 lm 156 lm/W

- Control**
- 5983** \_ \_ / \_ 1  
DALI
  - 5983** \_ \_ / \_ 3  
1-10V
  - 5983** \_ \_ / \_ Z \_ 30  
Casambi (Remote)


**Materials**  
Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

**Light Source and electronics**  
2 x LED STRIP 21,6 W 600 mA  
Constant Current 1200 mA  
220~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,046 m³  
Gross weight 9,4 Kg Net weight 4,8 Kg



5985



#### Finishes

- 11/ \_ \_ Black  
(NCS S 8500-N)
- 23/ \_ \_ Warm White  
(NCS S 0502-Y50R)
- 25/ \_ \_ Beige D1  
(NCS S 4005-Y50R)

#### LED temperature colour

- /1 \_ 2700 K   
CRI >90 7680 lm 119 lm/W
- /3 \_ 3500 K   
CRI >90 10080 lm 156 lm/W

#### Control

- 5985 \_ \_ / \_ 1 \_ 30  
DALI (Remote)
- 5985 \_ \_ / \_ 3 \_ 30  
1-10V (Remote)
- 5985 \_ \_ / \_ Z \_ 30  
Casambi (Remote)

#### Materials

Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

#### Light Source and electronics


2 x LED STRIP 32,4 W 600 mA  
Constant Current 600 mA Remote  
220~240V 50/60Hz

#### Packaging


2 Boxes  
Total Vol 0,066 m³  
Gross weight 13,5 Kg Net weight 6,9 Kg




## Wall Vanity light



5987




5989

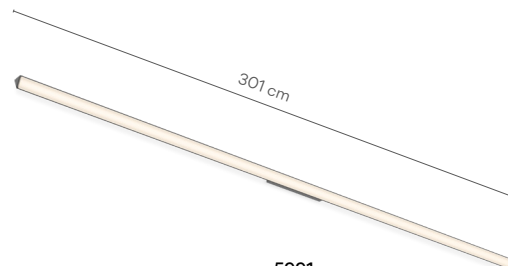

5991



## 5987



| Finishes                                         | LED temperature colour                |
|--------------------------------------------------|---------------------------------------|
| ● <b>11/</b> _ _ Black<br>(NCS S 8500-N)         | /1 _ 2700 K  CRI >90 1560 lm 144 lm/W |
| ● <b>23/</b> _ _ Warm White<br>(NCS S 0502-Y50R) | /3 _ 3500 K  CRI >90 1920 lm 178 lm/W |
| ● <b>25/</b> _ _ Beige D1<br>(NCS S 4005-Y50R)   |                                       |

## Control

**5987** \_ \_ / \_ 1  
DALI

**5985** \_ \_ / \_ 3  
1-10V

**5985** \_ \_ / \_ Z \_ 30  
Casambi (Remote)

## Materials

Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

## Light Source and electronics

1 x LED STRIP 10,8 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz


## Packaging

1 Box 1,5 x 0,1 x 0,1 m  
Vol 0,015 m<sup>3</sup>  
Gross weight 3,1 Kg Net weight 1,6 Kg

## Notes

Central canopy with module  
LED inclined 30°

## 5989



| Finishes                                         | LED temperature colour                |
|--------------------------------------------------|---------------------------------------|
| ● <b>11/</b> _ _ Black<br>(NCS S 8500-N)         | /1 _ 2700 K  CRI >90 2560 lm 119 lm/W |
| ● <b>23/</b> _ _ Warm White<br>(NCS S 0502-Y50R) | /3 _ 3500 K  CRI >90 3360 lm 156 lm/W |
| ● <b>25/</b> _ _ Beige D1<br>(NCS S 4005-Y50R)   |                                       |

## Control

**5989** \_ \_ / \_ 1  
DALI

**5989** \_ \_ / \_ 3  
1-10V

**5989** \_ \_ / \_ Z \_ 30  
Casambi (Remote)

## Materials

Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

## Light Source and electronics

1 x LED STRIP 21,6 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz


## Packaging

1 Box 2,3 x 0,1 x 0,1 m  
Vol 0,023 m<sup>3</sup>  
Gross weight 4,9 Kg Net weight 2,6 Kg

## Notes

Central canopy with module  
LED inclined 30°

## 5991



| Finishes                                         | LED temperature colour                |
|--------------------------------------------------|---------------------------------------|
| ● <b>11/</b> _ _ Black<br>(NCS S 8500-N)         | /1 _ 2700 K  CRI >90 3840 lm 119 lm/W |
| ● <b>23/</b> _ _ Warm White<br>(NCS S 0502-Y50R) | /3 _ 3500 K  CRI >90 5040 lm 156 lm/W |
| ● <b>25/</b> _ _ Beige D1<br>(NCS S 4005-Y50R)   |                                       |

## Control

**5991** \_ \_ / \_ 1  
DALI

**5991** \_ \_ / \_ 3  
1-10V

**5991** \_ \_ / \_ Z \_ 30  
Casambi (Remote)

## Materials

Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

## Light Source and electronics

1 x LED STRIP 32,4 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz


## Packaging

1 Box 3,3 x 0,1 x 0,1 m  
Vol 0,033 m<sup>3</sup>  
Gross weight 6,9 Kg Net weight 3,6 Kg


## Notes

Central canopy with module  
LED inclined 30°

## Vertical Wall

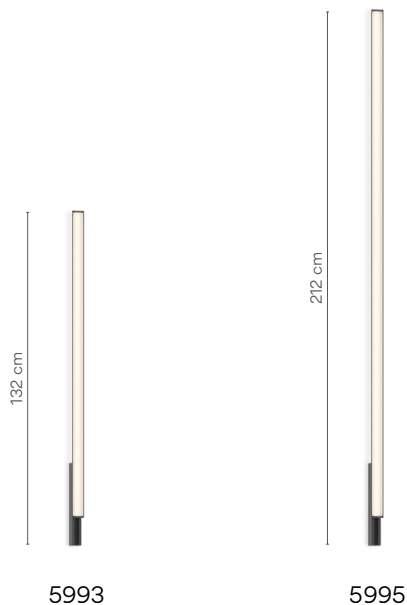

### 5993



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **23/** \_ \_ Warm White (NCS S 0502-Y50R)
  - **25/** \_ \_ Beige D1 (NCS S 4005-Y50R)

- LED temperature colour**
- /1** \_ 2700 K CRI >90 1560 lm 144 lm/W
  - /3** \_ 3500 K CRI >90 1920 lm 178 lm/W

- Control**
- 5993** \_ \_ / \_ 1 DALI
  - 5993** \_ \_ / \_ 3 1-10V
  - 5993** \_ \_ / \_ Z \_ 30 Casambi (Remote)

#### Materials

Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

#### Light Source and electronics


1 x LED STRIP 10,8W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz

#### Packaging

1 Box 1,5 x 0,1 x 0,1 m  
Vol 0,015 m³  
Gross weight 3,1 Kg Net weight 1,6 Kg

Dimmer

### 5995



- Finishes**
- **11/** \_ \_ Black (NCS S 8500-N)
  - **23/** \_ \_ Warm White (NCS S 0502-Y50R)
  - **25/** \_ \_ Beige D1 (NCS S 4005-Y50R)

- LED temperature colour**
- /1** \_ 2700 K CRI >90 2560 lm 119 lm/W
  - /3** \_ 3500 K CRI >90 3360 lm 156 lm/W

- Control**
- 5995** \_ \_ / \_ 1 DALI
  - 5995** \_ \_ / \_ 3 1-10V
  - 5995** \_ \_ / \_ Z \_ 30 Casambi (Remote)

#### Materials

Profile: Aluminum. Difuser: PMMA & Silicone.  
Canopy: Aluminum.

#### Light Source and electronics

1 x LED STRIP 21,6 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz

#### Packaging

1 Box 2,3 x 0,1 x 0,1 m  
Vol 0,023 m³  
Gross weight 4,9 Kg Net weight 2,6 Kg


Dimmer

# Suite


Design by Jordi Vilardell & Meritxell Vidal

Reinterprets and updates the traditional combination of side table or shelf with table lamp. Its warm and comfortable lighting effect appears when least expected, a pleasant luminous surprise.

## Floor Table

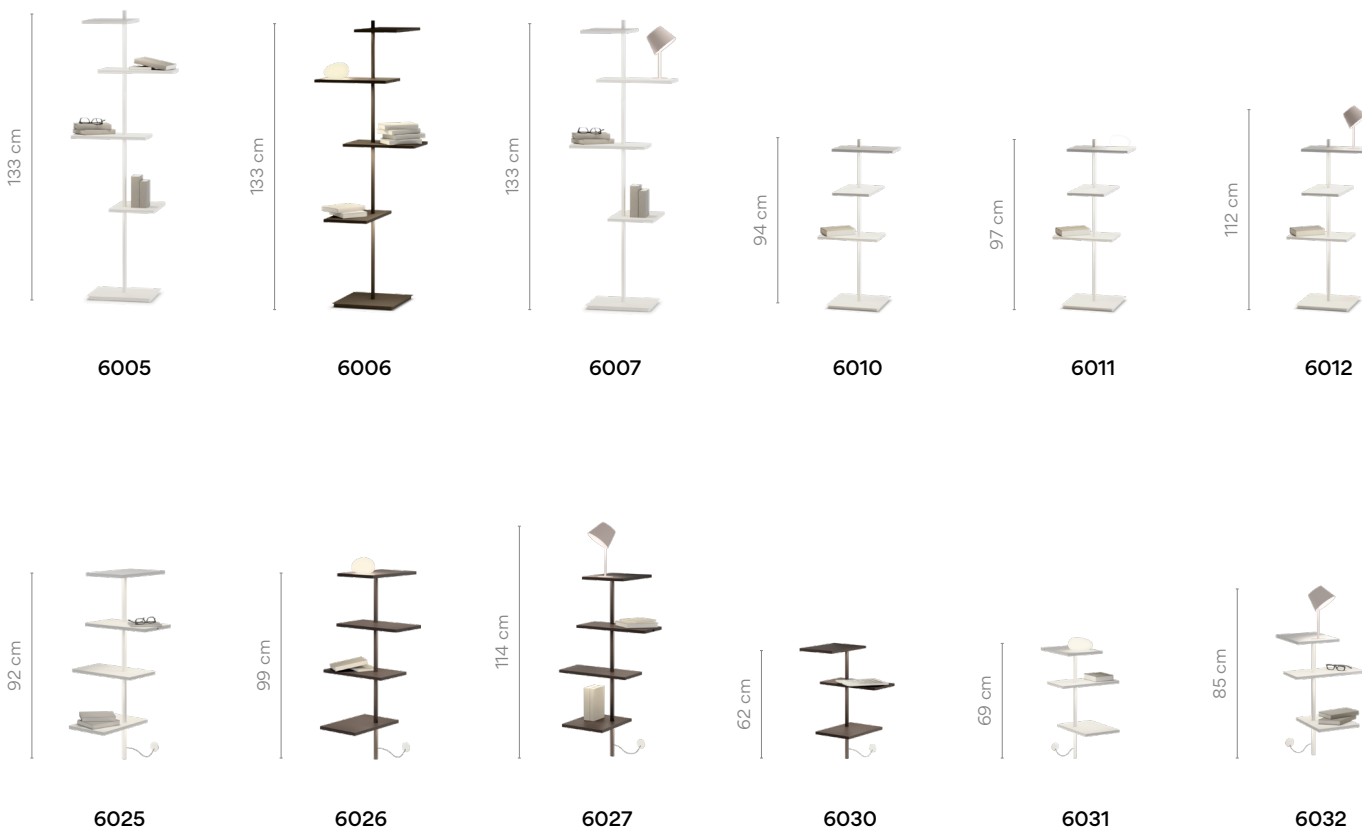

### 6005



**Finishes**  
 ● **14/** \_ \_ Chocolate (RAL 8019)  
 ● **93/** \_ \_ White (RAL 9016)  
**Finish customization**  
 (Available options:  
 Vibia colour palette)

**LED temperature colour**  
 /1\_ 2700 K   
 CRI >90 1054,6 lm 78 lm/W

**Control**  
**6005** \_ \_ / \_ **0**  
 On/ Off

**Materials**  
 Shelf: Aluminum. Diffuser: Polycarbonate.  
 Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.

**Light Source and electronics**  
 8 x LED STRIP 24V 1,63 W  
 Constant Voltage 24V  
 220~240V 50Hz


**Packaging**  
 1 Box 0,730 x 0,535 x 1,385 m  
 Vol 0,4513 m³  
 Gross weight 34,1 Kg Net weight 16,5 Kg

**Notes**  
 USB charging connection.  
 LED on/off switch under the shelf.  
 Electric cable 2,5 m



## 6006



**Finishes**

● **14/** \_ \_ Chocolate (RAL 8019)

● **93/** \_ \_ White (RAL 9016)

**Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**

/1\_ 2700 K 

CRI >90 1539,64 lm 88 lm/W

**Control**

**6006** \_ \_ / \_ 5

Push

**Materials**

Shelf: Aluminum. Diffuser: Polycarbonate.  
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.

**Light Source and electronics**

8 x LED STRIP 24V 1,63 W.  
1 x LED 4,5 W 350 mA  
Constant Current / Constant Voltage 350 24V  
220-240V 50Hz

**Packaging**


1 Box 0,730 x 0,535 x 1,385 m  
Vol 0,4513 m<sup>3</sup>  
Gross weight 34,3 Kg Net weight 16,7 Kg

**Notes**

Glass diffuser mounted on shelf with dimmable light.  
USB charging connection.  
LED on/off switch under the shelf.  
Electric cable 2,5 m.

LED  IP20  CE  EAC   Dimmer

## 6007



**Finishes**

● **14/** \_ \_ Chocolate (RAL 8019)

● **93/** \_ \_ White (RAL 9016)

**Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**

/1\_ 2700 K 

CRI >90 1539,64 lm 88 lm/W

**Control**

**6007** \_ \_ / \_ 5

Push

**Materials**

Shelf: Aluminum. Diffuser: Polycarbonate.  
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.

**Light Source and electronics**

8 x LED STRIP 24V 1,63 W.  
1 x LED 4,5 W 350 mA  
Constant Current / Constant Voltage 350 24V  
220-240V 50Hz

**Packaging**


1 Box 0,730 x 0,535 x 1,385 m  
Vol 0,4513 m<sup>3</sup>  
Gross weight 34,3 Kg Net weight 17 Kg

**Notes**

Reading light mink (Pantone 407C), mounted on shelf with dimmable light.  
USB charging connection.  
LED on/off switch under the shelf.  
Electric cable 2,5 m.

LED  IP20  CE  EAC   Dimmer

## 6010



**Finishes**

● **14/** \_ \_ Chocolate (RAL 8019)

● **93/** \_ \_ White (RAL 9016)

**Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**

/1\_ 2700 K 

CRI >90 791 lm 77 lm/W

**Control**

**6010** \_ \_ / \_ 0

On/ Off

**Materials**

Shelf: Aluminum. Diffuser: Polycarbonate.  
Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.

**Light Source and electronics**

6 x LED STRIP 24V 1,63 W  
Constant Voltage 24V  
220-240V 50Hz

**Packaging**

1 Box 0,45 x 0,80 x 0,20 m  
Vol 0,0072 m<sup>3</sup>  
Gross weight 16,10 Kg Net weight 16,10 Kg

**Notes**

USB charging connection.  
LED on/off switch under the shelf.  
Electric cable 2,5 m

LED  IP20  CE  EAC  

|      |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                 |                                                             |
|------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| 6011 |  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>14/</b> _ _ Chocolate (RAL 8019)</li> <li>● <b>93/</b> _ _ White (RAL 9016)</li> </ul> <p><b>Finish customization</b><br/>(Available options:<br/>Vibia colour palette)</p> <hr/> <p><b>Materials</b><br/>Shelf: Aluminum. Diffuser: Polycarbonate.<br/>Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.</p> <p><b>Light Source and electronics</b><br/>6 x LED STRIP 24V 1,63 W.<br/>1 x LED 4,5 W 350 mA<br/>Constant Current / Constant Voltage 350 24V<br/>220~240V 50Hz</p> | <p><b>LED temperature colour</b><br/>/1_ 2700 K  <b>F</b><br/>CRI &gt;90 790,98 lm 55 lm/W</p>  | <p><b>Control</b><br/><b>6011</b> _ _ / _ 5<br/>Push</p>    |
| 6012 |  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>14/</b> _ _ Chocolate (RAL 8019)</li> <li>● <b>93/</b> _ _ White (RAL 9016)</li> </ul> <p><b>Finish customization</b><br/>(Available options:<br/>Vibia colour palette)</p> <hr/> <p><b>Materials</b><br/>Shelf: Aluminum. Diffuser: Polycarbonate.<br/>Vertical tube: Steel. Base: Steel. Lid: ABS with fiberglass.</p> <p><b>Light Source and electronics</b><br/>6 x LED STRIP 24V 1,63 W.<br/>1 x LED 4,5 W 350 mA<br/>Constant Current / Constant Voltage 350 24V<br/>220~240V 50Hz</p> | <p><b>LED temperature colour</b><br/>/1_ 2700 K  <b>F</b><br/>CRI &gt;90 1275,98 lm 89 lm/W</p> | <p><b>Control</b><br/><b>6012</b> _ _ / _ 5<br/>Push</p>    |
| 6025 |  | <p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>14/</b> _ _ Chocolate (RAL 8019)</li> <li>● <b>93/</b> _ _ White (RAL 9016)</li> </ul> <p><b>Finish customization</b><br/>(Available options:<br/>Vibia colour palette)</p> <hr/> <p><b>Materials</b><br/>Shelf: Aluminum. Diffuser: Polycarbonate.<br/>Vertical tube: Steel. Lid: ABS with fiberglass.</p> <p><b>Light Source and electronics</b><br/>8 x LED STRIP 24V 1,63W<br/>Constant Voltage 24V<br/>220~240V 50Hz</p>                                                                | <p><b>LED temperature colour</b><br/>/1_ 2700 K  <b>F</b><br/>CRI &gt;90 1054,6 lm 78 lm/W</p>  | <p><b>Control</b><br/><b>6025</b> _ _ / _ 0<br/>On/ Off</p> |

LED IP20 Dimmer

**Packaging**  
1 Box 0,730 x 0,535 x 1,385 m  
Vol 0,3623 m<sup>3</sup>  
Gross weight 33,6 Kg Net weight 16 Kg

**Notes**  
Reading light mink (Pantone 407C),  
mounted on shelf with dimmable light.  
USB charging connection.  
LED on/off switch under the shelf.  
Electric cable 2,5 m


LED IP20 Dimmer

**Packaging**  
1 Box 0,61 x 0,54 x 1,1 m  
Vol 0,3623 m<sup>3</sup>  
Gross weight 11 Kg Net weight 5,6 Kg

**Notes**  
USB charging connection.  
LED on/off switch under the shelf.  
Electric cable 2,5 m

LED IP20

## 6026



**Finishes**

- 14/ \_ \_ Chocolate (RAL 8019)
- 93/ \_ \_ White (RAL 9016)

**Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 1539,6 lm 88 lm/W

**Control**  
6026 \_ \_ / \_ 5  
Push

**Materials**  
Shelf: Aluminum. Diffuser: Polycarbonate.  
Vertical tube: Steel. Lid: ABS with fiberglass.


**Light Source and electronics**  
8 x LED STRIP 24V 1,63 W.  
1 x LED 4,5 W 350 mA  
Constant Current / Constant Voltage 350 24V  
220-240V 50Hz

**Packaging**  
1 Box 0,61 x 0,54 x 1,1 m  
Vol 0,3623 m<sup>3</sup>  
Gross weight 11,2 Kg Net weight 5,8 Kg

**Notes**  
Glass diffuser mounted  
on shelf with dimmable light.  
USB charging connection.  
LED on/off switch under the shelf.  
Electric cable 2,5 m

LED IP20 EAC Dimmer

## 6027



**Finishes**

- 14/ \_ \_ Chocolate (RAL 8019)
- 93/ \_ \_ White (RAL 9016)

**Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 1539,6 lm 88 lm/W

**Control**  
6027 \_ \_ / \_ 5  
Push

**Materials**  
Shelf: Aluminum. Diffuser: Polycarbonate.  
Vertical tube: Steel. Lid: ABS with fiberglass.


**Light Source and electronics**  
8 x LED STRIP 24V 1,63 W.  
1 x LED 4,5 W 350 mA  
Constant Current / Constant Voltage 350 24V  
220-240V 50Hz

**Packaging**  
1 Box 0,61 x 0,54 x 1,1 m  
Vol 0,4513 m<sup>3</sup>  
Gross weight 12,4 Kg Net weight 6,1 Kg

**Notes**  
Reading light mink (Pantone 407C),  
mounted on shelf with dimmable light.  
USB charging connection.  
LED on/off switch under the shelf.  
Electric cable 2,5 m

LED IP20 EAC Dimmer

## 6030



**Finishes**

- 14/ \_ \_ Chocolate (RAL 8019)
- 93/ \_ \_ White (RAL 9016)

**Finish customization**  
(Available options:  
Vibia colour palette)

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 791,0 lm 77 lm/W

**Control**  
6030 \_ \_ / \_ 0  
On/ Off



**Materials**  
Shelf: Aluminum. Diffuser: Polycarbonate.  
Vertical tube: Steel. Lid: ABS with fiberglass.

**Light Source and electronics**  
6 x LED STRIP 24V 1,63 W  
Constant Voltage 24V  
220-240V 50Hz

**Packaging**  
1 Box 0,61 x 0,54 x 1,1 m  
Vol 0,3623 m<sup>3</sup>  
Gross weight 9,8 Kg Net weight 4,4 Kg


**Notes**  
USB charging connection.  
LED on/off switch under the shelf.  
Electric cable 2,5 m

LED IP20 EAC

|                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>6031</div> <div>  </div>   | <div> <div>Finishes</div> <div> <div> <div></div> <div>14/ _ _ Chocolate</div> <div>(RAL 8019)</div> </div> <div> <div></div> <div>93/ _ _ White</div> <div>(RAL 9016)</div> </div> </div> <div>Finish customization</div> <div>(Available options:</div> <div>Vibia colour palette)</div> </div> <div> <div>LED temperature colour</div> <div>/1 _ 2700 K </div> <div>CRI &gt;90 791,0 lm 55 lm/W</div> </div>  | <div> <div>Control</div> <div>6031 _ _ / _ 5</div> <div>Push</div> </div> <div> <div>Packaging</div> <div>1 Box 0,61 x 0,54 x 1,1 m</div> <div>Vol 0,3623 m³</div> <div>Gross weight 10 Kg Net weight 4,6 Kg</div> </div> <div> <div>Notes</div> <div>Glass diffuser mounted on shelf with dimmable light.</div> <div>USB charging connection.</div> <div>LED on/off switch under the shelf.</div> <div>Electric cable 2,5 m</div> </div> <div> <div>LED</div> <div></div> <div>IP20</div> <div></div> <div>EAC</div> <div></div> <div>Dimmer</div> </div>                             |
| <div>6032</div> <div>  </div> | <div> <div>Finishes</div> <div> <div> <div></div> <div>14/ _ _ Chocolate</div> <div>(RAL 8019)</div> </div> <div> <div></div> <div>93/ _ _ White</div> <div>(RAL 9016)</div> </div> </div> <div>Finish customization</div> <div>(Available options:</div> <div>Vibia colour palette)</div> </div> <div> <div>LED temperature colour</div> <div>/1 _ 2700 K </div> <div>CRI &gt;90 791,0 lm 55 lm/W</div> </div> | <div> <div>Control</div> <div>6032 _ _ / _ 5</div> <div>Push</div> </div> <div> <div>Packaging</div> <div>1 Box 0,61 x 0,54 x 1,1 m</div> <div>Vol 0,3623 m³</div> <div>Gross weight 10,3 Kg Net weight 4,9 Kg</div> </div> <div> <div>Notes</div> <div>Reading light mink (Pantone 407C), mounted on shelf with dimmable light.</div> <div>USB charging connection.</div> <div>LED on/off switch under the shelf.</div> <div>Electric cable 2,5 m</div> </div> <div> <div>LED</div> <div></div> <div>IP20</div> <div></div> <div>EAC</div> <div></div> <div>Dimmer</div> </div> |

## Wall




|                                                                                                              |                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <div>6035</div> <div></div> | <div>Finishes</div> <div><div><div></div>14/ _ _ Chocolate<br/>(RAL 8019)</div><div><div></div>93/ _ _ White<br/>(RAL 9016)</div></div> |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|

Finish customization  
(Available options:  
Vibia colour palette)



## 6045



- Finishes**
- 14/ \_ \_ Chocolate (RAL 8019)
  - 93/ \_ \_ White (RAL 9016)

**Finish customization**  
(Available options:  
Vibia colour palette)

### Materials

Shelf: Aluminum. Diffuser: Polycarbonate.  
Lid: Steel.

### Light Source and electronics

1 x LED STRIP 24V 1,63W.  
1 x LED 4,5W 350mA.  
Constant Current / Constant Voltage 350 24V  
220~240V 50Hz

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 616,83 lm 101 lm/W

### Control


6045 \_ \_ / \_ 0  
On/ Off

### Packaging

1 Box 0,29 x 0,38 x 0,38 m  
Vol 0,418 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,8 Kg

LED IP20 CE EAC

## 6046



- Finishes**
- 14/ \_ \_ Chocolate (RAL 8019)
  - 93/ \_ \_ White (RAL 9016)

**Finish customization**  
(Available options:  
Vibia colour palette)

### Materials

Shelf: Aluminum. Diffuser: Polycarbonate.  
Lid: Steel.

### Light Source and electronics

1 x LED STRIP 24V 1,63W.  
1 x LED 4,5W 350mA.  
Constant Current / Constant Voltage 350 24V  
220~240V 50Hz

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 616,83 lm 101 lm/W

### Control


6046 \_ \_ / \_ 0  
On/ Off

### Packaging

1 Box 0,29 x 0,38 x 0,38 m  
Vol 0,418 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,8 Kg

LED IP20 CE EAC

## 6050



- Finishes**
- 93/ \_ \_ White (RAL 9016)

### Materials

Wall support: Aluminum.  
Diffuser: Blown-glass

### Light Source and electronics

1 x LED 4,5W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 485 lm 121 lm/W

### Control

6050 \_ \_ / \_ 0  
On/ Off

### Packaging

1 Box 0,13 x 0,20 x 0,21 m  
Vol 0,00055 m<sup>3</sup>  
Gross weight 0,6 Kg Net weight 0,4 Kg

LED IP20 CE EAC

# Tube

Design by Ichiro Iwasaki

Shade Landscape. A fluid gesture outlines the tubes, which when set out over a space become the structure that facilitates a meeting of the shades in a harmonious coming together.

---

## Ceiling Pendants

**6100**

ø 28,5 cm



**6105**

ø 41 cm



**6110**

ø 52 cm



**6115**

97 cm



**6160**



ø 22 cm


**6165**




ø 28,5 cm

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Tube composition quick  
and easy at [vibia.com](http://vibia.com)

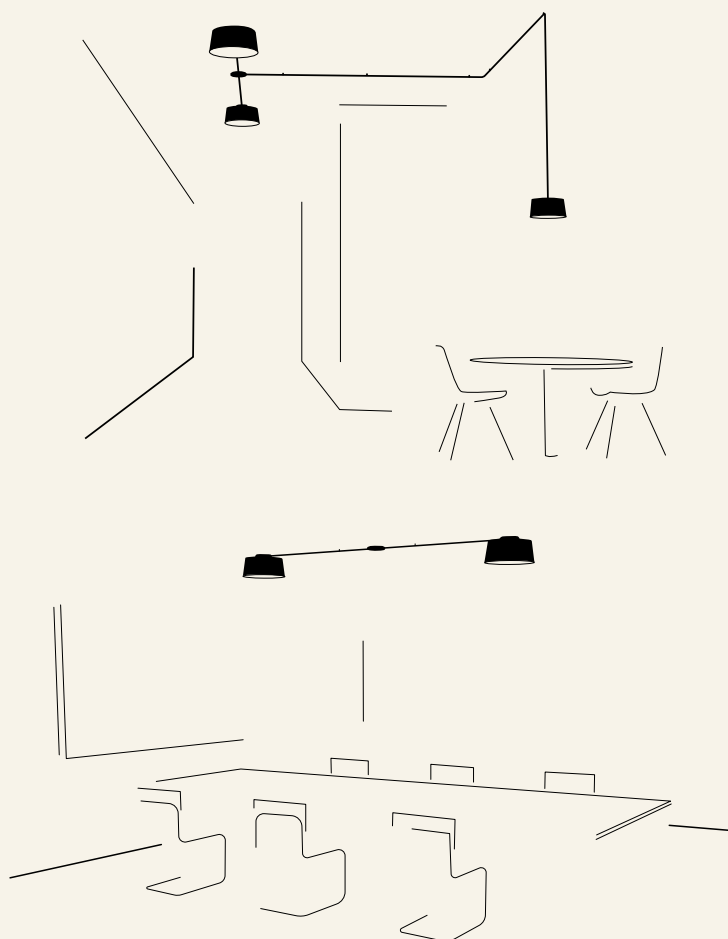

## 6100



### Finishes

- 10/ \_ \_ White  
(NCS S 0300-N)
- 15/ \_ \_ Grey L2  
(NCS S 2500-N)
- 16/ \_ \_ Grey M1  
(NCS S 4500-N)
- 21/ \_ \_ Black Grey  
(NCS S 7000-N)
- 24/ \_ \_ Beige M1  
(NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red  
(NCS S 4040-Y70R)

### LED temperature colour

- /1 \_ 2700 K ☐ ☐  
CRI >90 1476,7 lm 109 lm/W
- /2 \_ 3000 K ☐ ☐  
CRI >90 1521,0 lm 113 lm/W
- /3 \_ 3500 K ☐ ☐  
CRI >90 1550,6 lm 114,9 lm/W

### Control

6100 \_ \_ / \_ A  
DALI-2

### Materials

Diffuser: Polycarbonate. Led support: Aluminum.  
Shade: Aluminum. Canopy: Steel.

### Light Source and electronics


1 x LED PLATE 13,5 W 700 mA  
Constant Current 700 mA  
110-240V 50/60Hz

### Packaging

1 Box 0,40 x 0,40 x 0,35 m  
Vol 0,056 m<sup>3</sup>  
Gross weight 4,5 Kg Net weight 2,5 Kg

LED IP20 CE EAC Bi-volt

## 6105



## Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 15/ \_ \_ Grey L2 (NCS S 2500-N)
- 16/ \_ \_ Grey M1 (NCS S 4500-N)
- 21/ \_ \_ Black Grey (NCS S 7000-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)

## LED temperature colour

- /1 \_ 2700 K CRI >90 2413,2 lm 121 lm/W
- /2 \_ 3000 K CRI >90 2485,6 lm 124 lm/W
- /3 \_ 3500 K CRI >90 2533,9 lm 126,7 lm/W

## Control

6105 \_ \_ / \_ A  
DALI-2

## Materials

Diffuser: Polycarbonate. Led support: Aluminum.  
Shade: Aluminum. Canopy: Steel.


## Light Source and electronics

1 x LED PLATE 20 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

## Packaging

1 Box 0,60 x 0,60 x 0,40 m  
Vol 0,144 m<sup>3</sup>  
Gross weight 5,5 Kg Net weight 3,5 Kg

## 6110



## Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 15/ \_ \_ Grey L2 (NCS S 2500-N)
- 16/ \_ \_ Grey M1 (NCS S 4500-N)
- 21/ \_ \_ Black Grey (NCS S 7000-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)

## LED temperature colour

- /1 \_ 2700 K CRI >90 3299,1 lm 132 lm/W
- /2 \_ 3000 K CRI >90 3398,1 lm 136 lm/W
- /3 \_ 3500 K CRI >90 3464,0 lm 138,6 lm/W

## Control

6110 \_ \_ / \_ A  
DALI-2

## Materials

Diffuser: Polycarbonate. Led support: Aluminum.  
Shade: Aluminum. Canopy: Steel.


## Light Source and electronics

1 x LED PLATE 25 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

## Packaging

1 Box 0,60 x 0,60 x 0,40 m  
Vol 0,144 m<sup>3</sup>  
Gross weight 6,5 Kg Net weight 4,5 Kg

## 6115



## Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 71/ \_ \_ Grey L2, Grey M1, Black Grey (NCS S 2500-N, NCS S 4500-N, NCS S 7000-N)

## LED temperature colour

- /1 \_ 2700 K CRI >90 7189,0 lm 123 lm/W
- /2 \_ 3000 K CRI >90 7404,7 lm 127 lm/W
- /3 \_ 3500 K CRI >90 7548,5 lm 129 lm/W

## Control

6115 \_ \_ / \_ A  
DALI-2

## Materials

Diffuser: Polycarbonate. Led support: Aluminum.  
Shade: Aluminum. Canopy: Steel.

## Light Source and electronics

1 x LED PLATE 13,5 W 700 mA  
1 x LED PLATE 20 W 700 mA  
1 x LED PLATE 25 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz


## Packaging

1 Box 1 x 1 x 0,40 m  
Vol 0,40 m<sup>3</sup>  
Gross weight 16 Kg Net weight 12 Kg

## Notes

Require only one electrical connection  
on the big shade

## 6160



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 15/ \_ \_ Grey L2 (NCS S 2500-N)
- 16/ \_ \_ Grey M1 (NCS S 4500-N)
- 21/ \_ \_ Black Grey (NCS S 7000-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1 \_ 2700 K CRI >90 1170 lm 111 lm/W
- /2 \_ 3000 K CRI >90 1251 lm 119 lm/W
- /3 \_ 3500 K CRI >90 1251 lm 119 lm/W

### Control

6160 \_ \_ / \_ 1  
DALI

6160 \_ \_ / \_ B  
1-10V, Push

6160 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Shade: Aluminum.  
Led support: Aluminum. Tube: Steel. Canopy: Steel.

### Light Source and electronics

1 x LED PLATE 10,5 W 15 V  
Constant Current 700 mA  
110~240V 50/60Hz

### Packaging

Total Vol 0,04 m3  
Gross weight 4,40 Kg Net weight 2,15 Kg


### Notes

Extra cable length. 16,00 €/m

### Electrical connection

Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote Micro  
for plaster ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings

## 6165



### Finishes

- 10/ \_ \_ White (NCS S 0300-N)
- 15/ \_ \_ Grey L2 (NCS S 2500-N)
- 16/ \_ \_ Grey M1 (NCS S 4500-N)
- 21/ \_ \_ Black Grey (NCS S 7000-N)
- 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1 \_ 2700 K CRI >90 1170 lm 111 lm/W
- /2 \_ 3000 K CRI >90 1251 lm 119 lm/W
- /3 \_ 3500 K CRI >90 1251 lm 119 lm/W

### Control

6165 \_ \_ / \_ 1  
DALI

6165 \_ \_ / \_ B  
1-10V, Push

6165 \_ \_ / \_ Z  
Casambi

### Materials

Diffuser: Polycarbonate. Shade: Aluminum.  
Led support: Aluminum. Tube: Steel. Canopy: Steel.

### Light Source and electronics

1 x LED PLATE 10,5 W 15 V  
Constant Current 700 mA  
110~240V 50/60Hz

### Packaging

Total Vol 0,04 m3  
Gross weight 4,40 Kg Net weight 2,15 Kg

### Notes

Extra cable length. 16,00 €/m


### Electrical connection

Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote Micro  
for plaster ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings


# Composing pendants

Next sketches are composed by one or more compositions


---

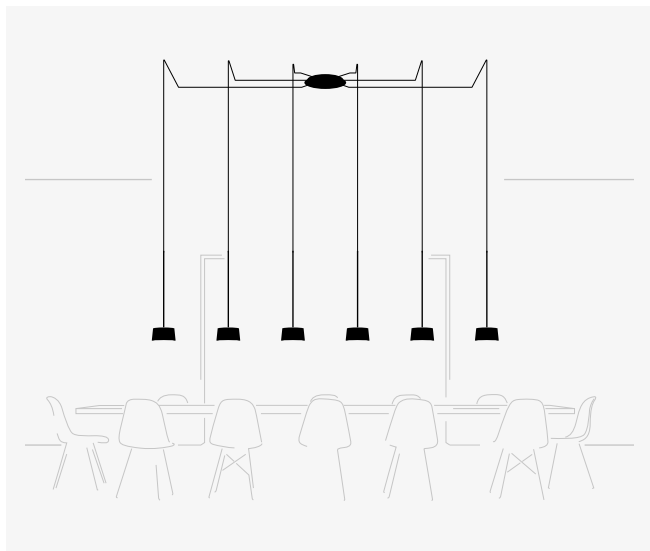

6 x 6165.

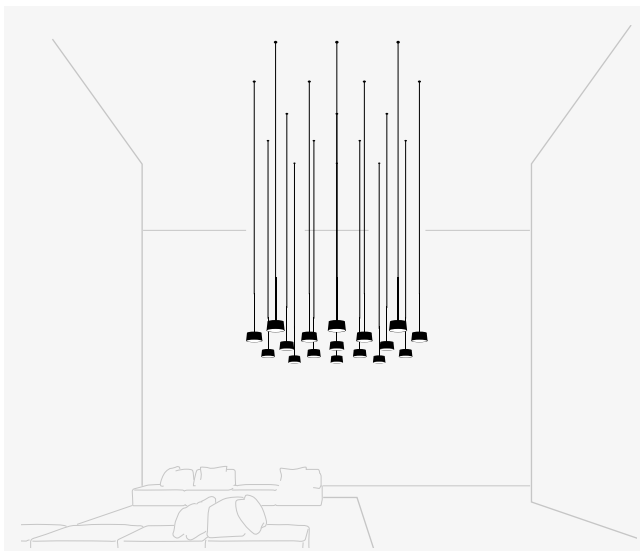

17 x 6160.

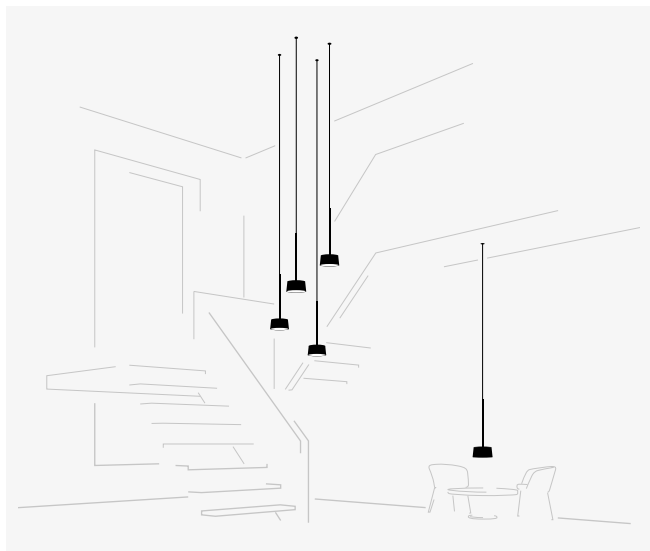

5 x 6160.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Tube composition quick  
and easy at [vibia.com](http://vibia.com)





# Electrical connection options for models 6160 / 6165


Choose your preferred installation option  
according to your needs.  
For each composition, the optimal minimum  
number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate  
the silkiness and lightness of compositions on  
suspended ceilings, its great visual grandeur taking  
center stage.

For Ref. 6160 / 6165

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.




---

## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 6160 / 6165


### Surface



ø 16,8 cm  
match with  
fixture finish.





### Free Wire



1 wire


ø 20 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.




2 - 3 wires

ø 22 cm



4 - 6 wires

ø 36 cm



7 - 9 wires

ø 40 cm



# Kontur

Design by Sebastian Herkner

Providing a framework for light, the Kontur collection serves as an elegant stage setting for the linear light source it contains. Its minimalist black frame pairs with different diffusers or reflectors in a poetic balance, creating myriad lighting ambiances.

## Wall



20 x 92 cm

6414



20 x 122 cm

6416



20 x 162 cm

6418



19 x 92 cm


6444



19 x 122 cm

6446

### 6414



#### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)

#### LED temperature colour

- /1 \_ 2700 K CRI >90 2381,3 lm 113 lm/W
- /2 \_ 3000 K CRI >90 2381,3 lm 113 lm/W
- /7 \_ 2200 K CRI >90 2041,15 lm 97,2 lm/W

#### Control

- 6414 \_ \_ / 1 DALI
- 6414 \_ \_ / 3 1-10V
- 6414 \_ \_ / 5 Push
- 6414 \_ \_ / Z Casambi

#### Materials

Concave shade: Aluminum. Diffuser: Polycarbonate. Structures: Steel. Canopy: Aluminum.

#### Light Source and electronics


1 x LED STRIP 20,8 W 750 mA  
Constant Current 750 mA  
90-305V 50/60Hz

#### Packaging

1 Box 0,30 x 0,30 x 1,05 m  
Vol 0,095 m³  
Gross weight 5,5 Kg Net weight 3,5 Kg



### 6416



#### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)

#### LED temperature colour

- /1 \_ 2700 K CRI >90 3153,9 lm 113 lm/W
- /2 \_ 3000 K CRI >90 3153,0 lm 113 lm/W
- /7 \_ 2200 K CRI >90 2703,32 lm 96,9 lm/W

#### Control

- 6416 \_ \_ / 1 DALI
- 6416 \_ \_ / 3 1-10V
- 6416 \_ \_ / 5 Push
- 6416 \_ \_ / Z Casambi

#### Materials

Concave shade: Aluminum. Diffuser: Polycarbonate. Structures: Steel. Canopy: Aluminum.

#### Light Source and electronics


1 x LED STRIP 27,9 W 750 mA  
Constant Current 750 mA  
90-305V 50/60Hz

#### Packaging

1 Box 0,30 x 0,30 x 1,35 m  
Vol 0,122 m³  
Gross weight 5,8 Kg Net weight 3,8 Kg



## 6418



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K **E** >90 4205,2 lm 113 lm/W  
 /2 \_ 3000 K **F** >90 4205,2 lm 113 lm/W  
 /7 \_ 2200 K **F** >90 3604,42 lm 96,9 lm/W

**Control**

6418 \_ \_ / \_ 1  
 DALI

6418 \_ \_ / \_ 3  
 1-10V

6418 \_ \_ / \_ 5  
 Push

6418 \_ \_ / \_ Z  
 Casambi

### Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.  
 Structures: Steel. Canopy: Aluminum.

### Light Source and electronics


1 x LED STRIP 37,2 W 750 mA  
 Constant Current 750 mA  
 90~305V 50/60Hz

### Packaging

1 Box 0,30 x 0,30 x 0,175 m  
 Vol 0,1580 m³  
 Gross weight 6,5 Kg Net weight 4 Kg

LED IP20 CE EAC  
 Dimmer Multi-volt

## 6444



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K **E** >90 2381,3 lm 114 lm/W  
 /2 \_ 3000 K **F** >90 2381,3 lm 114 lm/W  
 /3 \_ 3500 K **E** >90 2551,44 lm 122,7 lm/W  
 /7 \_ 2200 K **F** >90 2041,15 lm 98,1 lm/W

**Control**

6444 \_ \_ / \_ 1  
 DALI

6444 \_ \_ / \_ 3  
 1-10V

6444 \_ \_ / \_ 5  
 Push

6444 \_ \_ / \_ Z  
 Casambi

### Materials

Glass shade: Opal triplex Diffuser: Polycarbonate.  
 Structures: Steel. Canopy: Aluminum.

### Light Source and electronics


1 x LED STRIP 20,8 W 750 mA  
 Constant Current 750 mA  
 90~305V 50/60Hz

### Packaging

1 Box 0,30 x 0,30 x 1,05 m  
 Vol 0,095 m³  
 Gross weight 6,2 Kg Net weight 3,7 Kg

LED IP20 CE EAC  
 Dimmer Multi-volt

## 6446



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K **E** >90 3153,9 lm 113 lm/W  
 /2 \_ 3000 K **F** >90 3153,0 lm 113 lm/W  
 /3 \_ 3500 K **E** >90 3379,15 lm 121,1 lm/W  
 /7 \_ 2200 K **F** >90 2703,32 lm 96,9 lm/W

**Control**

6446 \_ \_ / \_ 1  
 DALI

6446 \_ \_ / \_ 3  
 1-10V

6446 \_ \_ / \_ 5  
 Push

6446 \_ \_ / \_ Z  
 Casambi

### Materials

Glass shade: Opal triplex Diffuser: Polycarbonate.  
 Structures: Steel. Canopy: Aluminum.

### Light Source and electronics


1 x LED STRIP 27,9 W 750 mA  
 Constant Current 750 mA  
 90~305V 50/60Hz

### Packaging

1 Box 0,30 x 0,30 x 1,35 m  
 Vol 0,122 m³  
 Gross weight 9 Kg Net weight 6 Kg

LED IP20 CE EAC  
 Dimmer Multi-volt

Pendants

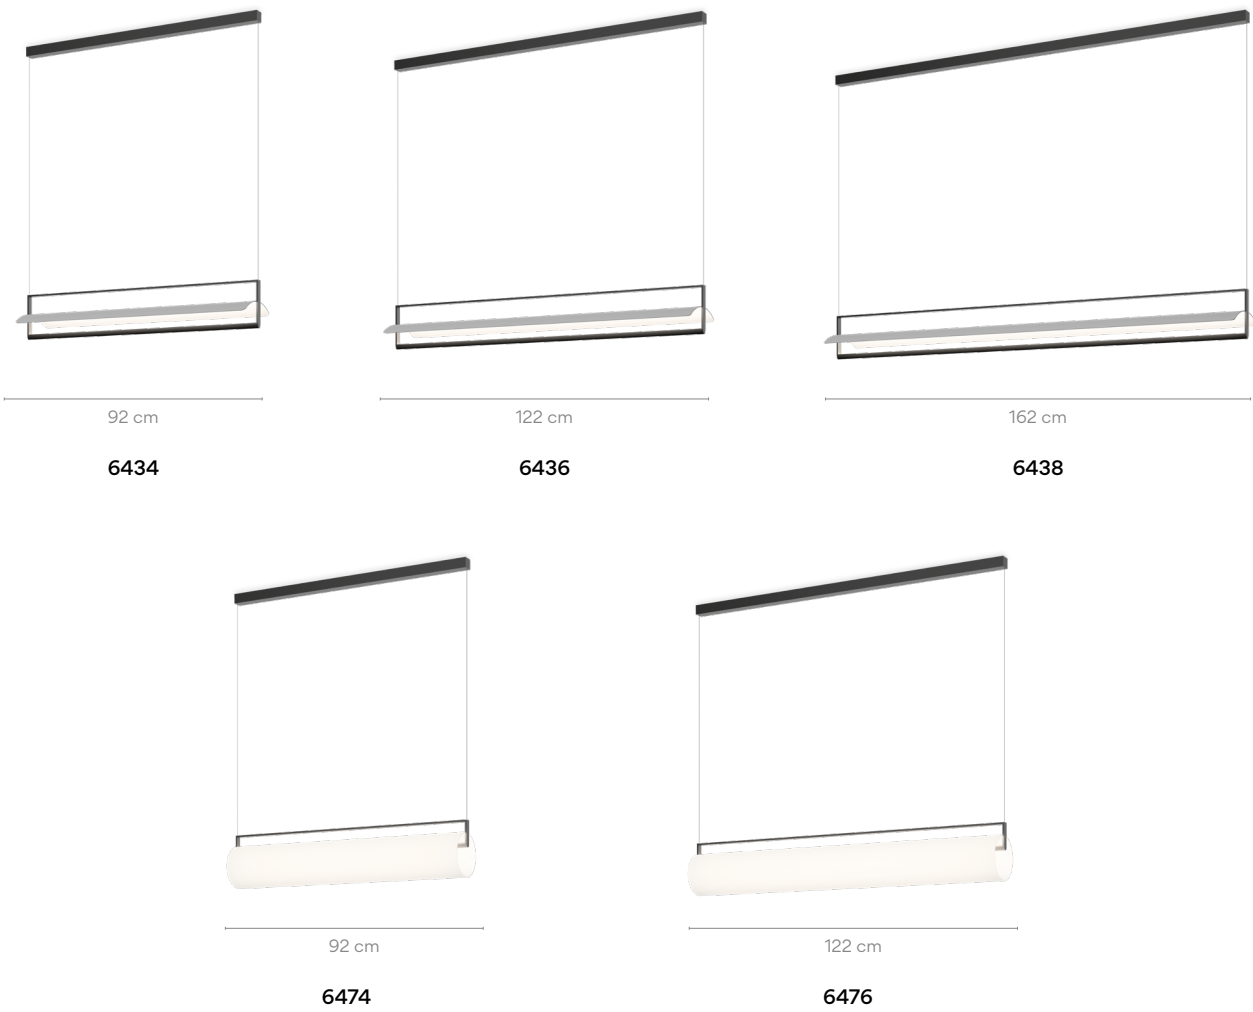

**6434**

20 cm

16 cm max. 200 cm

92 cm

**Finishes**

● **11/ \_ \_ Black**  
(NCS S 8500-N)

**LED temperature colour**

**/1 \_ 2700 K** **CRI >90 2381,3 lm 114 lm/W**

**/2 \_ 3000 K** **CRI >90 2381,3 lm 114 lm/W**

**/3 \_ 3500 K** **CRI >90 2551,44 lm 122,7 lm/W**

**/7 \_ 2200 K** **CRI >90 2041,15 lm 98,1 lm/W**

**Control**

**6434 \_ \_ / \_ 1**  
DALI

**6434 \_ \_ / \_ 3**  
1-10V

**6434 \_ \_ / \_ 5**  
Push

**6434 \_ \_ / \_ Z**  
Casambi

**Materials**

Concave shade: Aluminum. Diffuser: Polycarbonate.  
Structures: Steel. Canopy: Aluminum.

**Light Source and electronics**

1 x LED STRIP 20,8 W 750 mA  
Constant Current 750 mA  
90~305V 50/60Hz


**Packaging**

1 Box 0,30 x 0,30 x 1,05 m  
Vol 0,095 m³  
Gross weight 5,5 Kg Net weight 3,5 Kg

**Notes**

Extra cable length. **16,00 €/m**

## 6436



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K **E** >90 3153,9 lm 113 lm/W  
 /2 \_ 3000 K **F** >90 3154,0 lm 113 lm/W  
 /3 \_ 3500 K **E** >90 3379,15 lm 121,1 lm/W  
 /7 \_ 2200 K **F** >90 2703,32 lm 96,9 lm/W

**Control**

6436 \_ \_ / \_ 1  
 DALI

6436 \_ \_ / \_ 3  
 1-10V

6436 \_ \_ / \_ 5  
 Push

6436 \_ \_ / \_ Z  
 Casambi

### Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.  
 Structures: Steel. Canopy: Aluminum.

### Light Source and electronics

1 x LED STRIP 27,9 W 750 mA  
 Constant Current 750 mA  
 90~305V 50/60Hz

### Packaging


1 Box 0,30 x 0,30 x 1,35 m  
 Vol 0,122 m<sup>3</sup>  
 Gross weight 5,8 Kg Net weight 3,8 Kg

### Notes

Extra cable length. 16,00 €/m



## 6438



**Finishes**  
 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K **E** >90 4205,2 lm 113 lm/W  
 /2 \_ 3000 K **F** >90 4205,2 lm 113 lm/W  
 /3 \_ 3500 K **E** >90 4505,53 lm 121,1 lm/W  
 /7 \_ 2200 K **F** >90 3604,42 lm 96,9 lm/W

**Control**

6438 \_ \_ / \_ 1  
 DALI

6438 \_ \_ / \_ 3  
 1-10V

6438 \_ \_ / \_ 5  
 Push

6438 \_ \_ / \_ Z  
 Casambi

### Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.  
 Structures: Steel. Canopy: Aluminum.

### Light Source and electronics

1 x LED STRIP 37,2 W 750 mA  
 Constant Current 750 mA  
 90~305V 50/60Hz

### Packaging


1 Box 0,30 x 0,30 x 1,75 m  
 Vol 0,158 m<sup>3</sup>  
 Gross weight 6,5 Kg Net weight 4 Kg

### Notes

Extra cable length. 16,00 €/m



## 6474



**Finishes**  
 ● 11/ \_ \_ Black  
 (NCS S 8500-N)

**LED temperature colour**  
 /1 \_ 2700 K **E** >90 2381,3 lm 114 lm/W  
 /2 \_ 3000 K **F** >90 2381,3 lm 114 lm/W  
 /7 \_ 2200 K **F** >90 2041,15 lm 98,1 lm/W

**Control**

6474 \_ \_ / \_ 1  
 DALI

6474 \_ \_ / \_ 3  
 1-10V

6474 \_ \_ / \_ 5  
 Push

6474 \_ \_ / \_ Z  
 Casambi

### Materials

Glass shade: Opal triplex. Diffuser: Polycarbonate.  
 Structures: Steel. Canopy: Aluminum.

### Light Source and electronics

1 x LED STRIP 20,8 W 750 mA  
 Constant Current 750 mA  
 90~305V 50/60Hz

### Packaging

1 Box 0,30 x 0,30 x 1,05 m  
 Vol 0,095 m<sup>3</sup>  
 Gross weight 6,2 Kg Net weight 3,7 Kg


### Notes

Extra cable length. 16,00 €/m




6476

| Finishes                          | LED temperature colour                                                                                                        | Control                   |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| ● 11/ _ _ Black<br>(NCS S 8500-N) | /1 _ 2700 K <br>CRI >90 3153,9 lm 113 lm/W   | 6476 _ _ / _ 1<br>DALI    |
|                                   | /2 _ 3000 K <br>CRI >90 3153,0 lm 113 lm/W   | 6476 _ _ / _ 3<br>1-10V   |
|                                   | /7 _ 2200 K <br>CRI >90 2703,32 lm 96,9 lm/W | 6476 _ _ / _ 5<br>Push    |
|                                   |                                                                                                                               | 6476 _ _ / _ Z<br>Casambi |



| Materials                                                                                   | Packaging                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Glass shade: Opal triplex. Diffuser: Polycarbonate.<br>Structures: Steel. Canopy: Aluminum. | 1 Box 0,75 x 0,45 x 1,35 m<br>Vol 0,122 m³<br>Gross weight 9 Kg Net weight 6 Kg                                                                                                                                                                                                                                                                                                                   |
| Light Source and electronics                                                                | Notes                                                                                                                                                                                                                                                                                                                                                                                             |
| 1 x LED STRIP 27,9 W 750 mA<br>Constant Current 750 mA<br>90~305V 50/60Hz                   | Extra cable length. 16,00 €/m                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                             | <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div></div> <div><div>Dimmer</div><div>Multi-volt</div></div> |

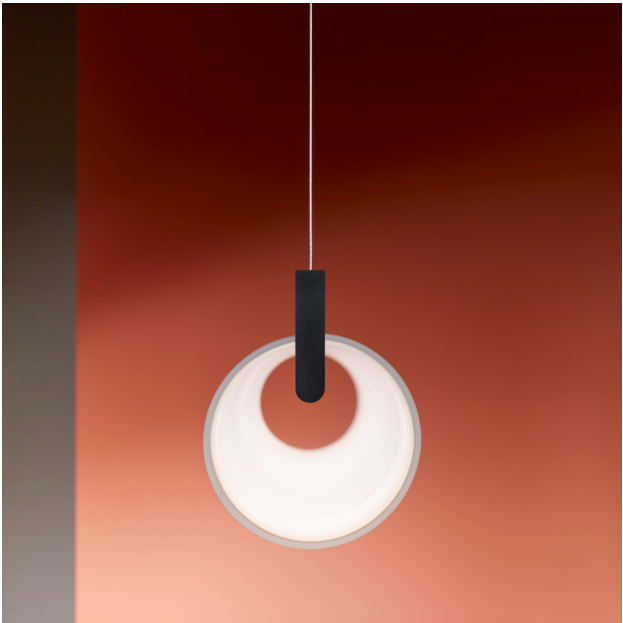







# Plusminus

Design by Diez Office.

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.






# Easy to design and install


Compose a personalised Plusminus at [vibia.com](http://vibia.com)

## From scratch

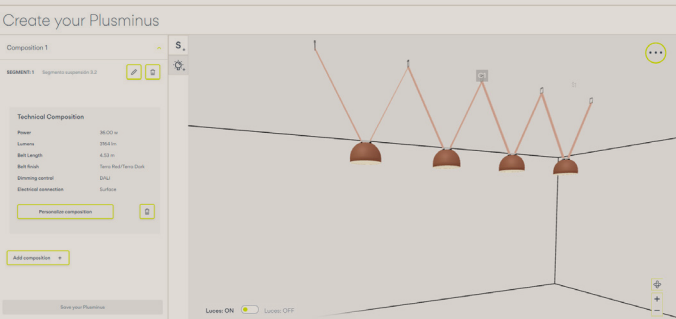


- + Create and compose projects in detail.
- + Draw and customise in 3D to see it in space.
- + Or customise it step by step without drawing.

## From a layout

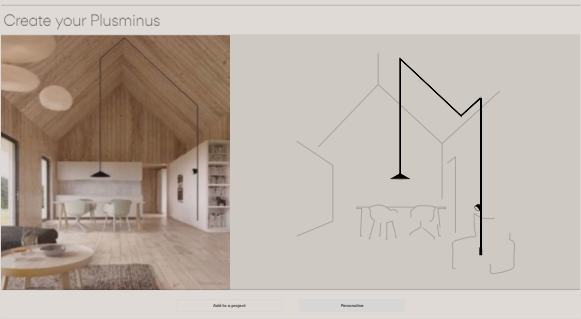

- + Customise and adapt it to the needs of your project.
- + Add it to your project and edit it at any time.
- + More than 100 creations for you.



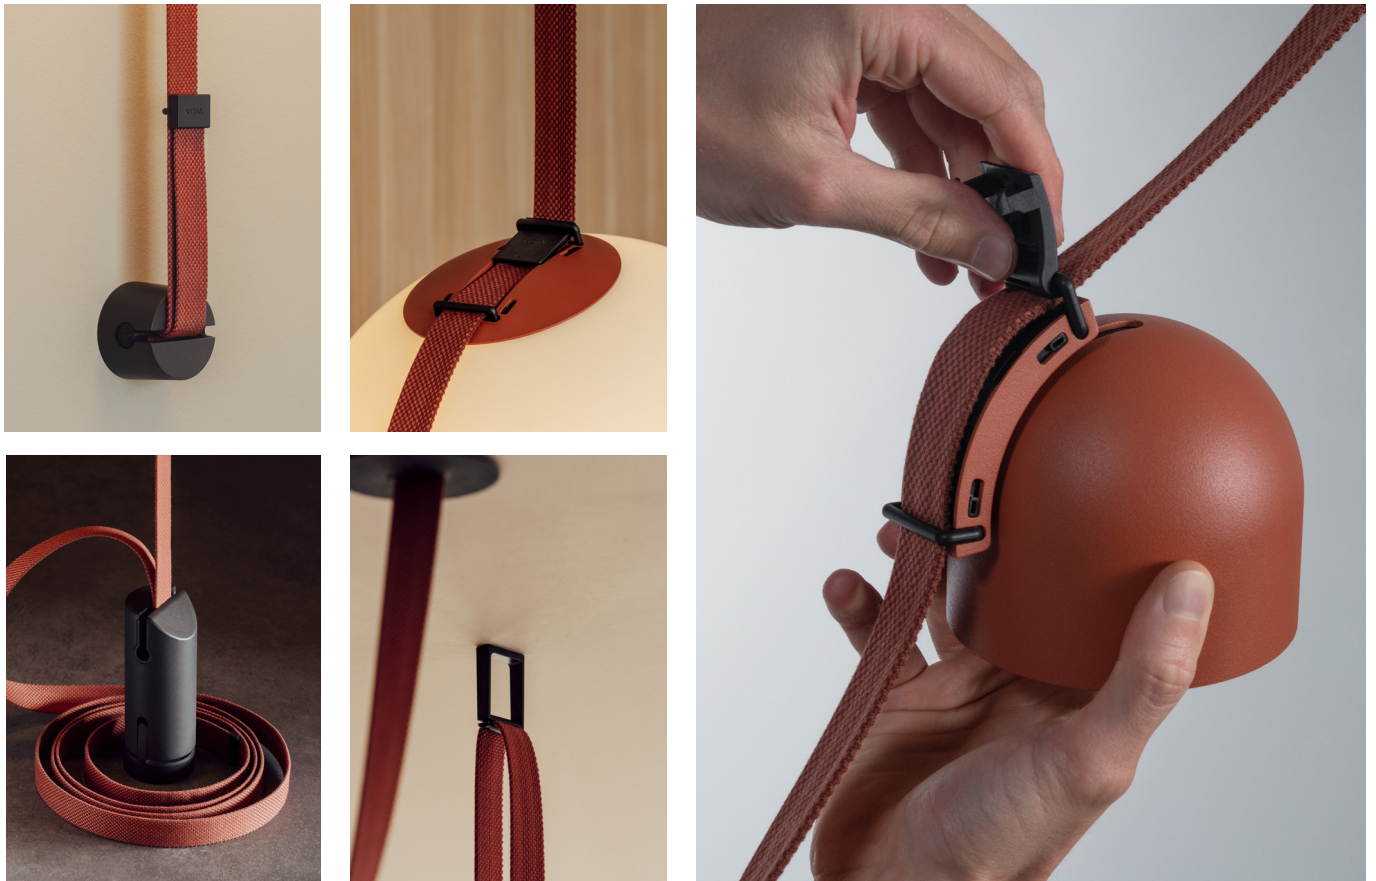

## Easy connection Fix / Click / Connect

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.

# Luminaire types and lighting effects



## Sphere



### **360° Diffusion lighting**

distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



## Semisphere



### **Directed diffusion lighting**

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



## Cone




### **Directed diffusion lighting**

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

## Spotlight




**Directed diffusion lighting** emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.



**Accent lighting** emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground. The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.



## Linear Diffuser



**General lighting** provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.



## Linear Low UGR



**High-efficiency, low-glare general linear lighting** offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.

**High-comfort, low-glare general linear lighting** provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.





# Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website [vibia.com](http://vibia.com)

## Sphere



Ø 20 cm


6230



Ø 30 cm

6235

### 6230



- Finishes
- 11/ \_ \_ Black (NCS S 8500-N)
  - 13/ \_ \_ Off-White (NCS S 1000-N)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.  
Body: Aluminum.

Light Source and electronics

1 x LED 7,9 W 450 mA

- LED temperature colour
- /1 \_ 2700 K CRI >90 846 lm 107,09 lm/W
  - /2 \_ 3000 K CRI >90 884 lm 111,9 lm/W
  - /3 \_ 3500 K CRI >90 916 lm 115,95 lm/W

Control

6230 \_ \_ / \_ 0  
On/ Off


6230 \_ \_ / \_ F  
Simultaneous line  
DALI, 1-10V, Push, Casambi

6230 \_ \_ / \_ Z  
Casambi integrated on each  
individual luminaire (P2P)

Packaging

1 Box 0,26 x 0,26 x 0,260 m  
Vol 0,0175 m³  
Gross weight 1,56 Kg Net weight 0,93 Kg

### 6235



- Finishes
- 11/ \_ \_ Black (NCS S 8500-N)
  - 13/ \_ \_ Off-White (NCS S 1000-N)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.  
Body: Aluminum.

Light Source and electronics

1 x LED 16 W 850 mA

- LED temperature colour
- /1 \_ 2700 K CRI >90 1492 lm 93,25 lm/W
  - /2 \_ 3000 K CRI >90 1569 lm 98,06 lm/W
  - /3 \_ 3500 K CRI >90 1606 lm 100,38 lm/W

Control

6235 \_ \_ / \_ 0  
On/ Off

6235 \_ \_ / \_ F  
Simultaneous line  
DALI, 1-10V, Push, Casambi

6235 \_ \_ / \_ Z  
Casambi integrated on each  
individual luminaire (P2P)

Packaging

1 Box 0,364 x 0,364 x 0,364 m  
Vol 0,0482 m³  
Gross weight 2,50 Kg Net weight 1,80 Kg

## Semisphere



Ø 20 cm


6220



Ø 30 cm

6225

### 6220



- Finishes**
- 11/ \_ \_ Black (NCS S 8500-N)
  - 13/ \_ \_ Off-White (NCS S 1000-N)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

- LED temperature colour**
- /1 \_ 2700 K ☐ CRI >90 846 lm 107,09 lm/W
  - /2 \_ 3000 K ☐ CRI >90 884 lm 111,9 lm/W
  - /3 \_ 3500 K ☐ CRI >90 916 lm 115,95 lm/W

- Control**
- 6220 \_ \_ / \_ 0  
On/ Off
- 6220 \_ \_ / \_ F  
Simultaneous line  
DALI, 1-10V, Push, Casambi
- 6220 \_ \_ / \_ Z  
Casambi integrated on each  
individual luminaire (P2P)


**Materials**  
Shade: Aluminum.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
1 x LED 7,9 W 450 mA

**Packaging**  
1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0175 m<sup>3</sup>  
Gross weight 1,20 Kg Net weight 0,78 Kg



### 6225



- Finishes**
- 11/ \_ \_ Black (NCS S 8500-N)
  - 13/ \_ \_ Off-White (NCS S 1000-N)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

- LED temperature colour**
- /1 \_ 2700 K ☐ CRI >90 1492 lm 93,25 lm/W
  - /2 \_ 3000 K ☐ CRI >90 1569 lm 98,06 lm/W
  - /3 \_ 3500 K ☐ CRI >90 1606 lm 100,38 lm/W

- Control**
- 6225 \_ \_ / \_ 0  
On/ Off
- 6225 \_ \_ / \_ F  
Simultaneous line  
DALI, 1-10V, Push, Casambi
- 6225 \_ \_ / \_ Z  
Casambi integrated on each  
individual luminaire (P2P)

**Materials**  
Shade: Aluminum.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
1 x LED 16 W 850 mA


**Packaging**  
1 Box 0,364 x 0,364 x 0,364 m  
Vol 0,0482 m<sup>3</sup>  
Gross weight 2 Kg Net weight 1,5 Kg





# Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website [vibia.com](http://vibia.com)

## Cone

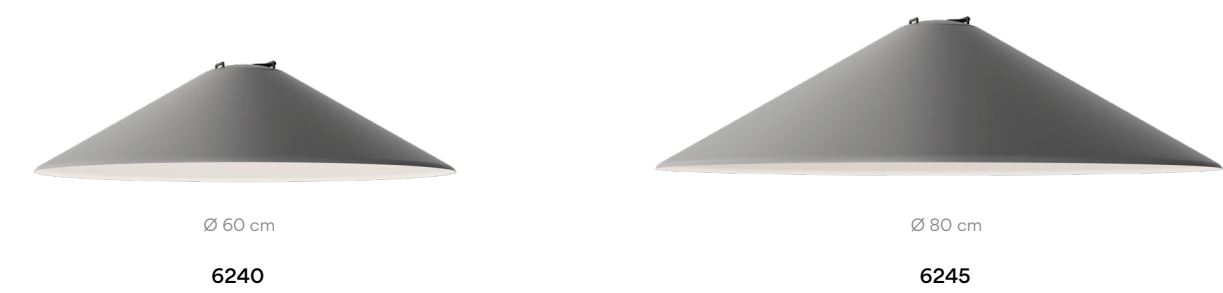

|                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>6240</b></p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"><li>11/ _ _ Black (NCS S 8500-N)</li><li>13/ _ _ Off-White (NCS S 1000-N)</li><li>37/ _ _ Terra Red (NCS S 4040-Y70R)</li><li>42/ _ _ Blue M1 (NCS S 5010-B10G)</li><li>53/ _ _ Green M1 (NCS S 6005-G80Y)</li></ul> <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"><li>/1 _ 2700 K  CRI &gt;90 1492 lm 93,25 lm/W</li><li>/2 _ 3000 K  CRI &gt;90 1569 lm 98,06 lm/W</li><li>/3 _ 3500 K  CRI &gt;90 1606 lm 100,38 lm/W</li></ul> <p><b>Materials</b></p> <p>Shade: Aluminum.<br/>Diffuser: Triplex opal glass.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED 16 W 850 mA</p> | <p><b>Control</b></p> <p><b>6240</b> _ _ / _ 0<br/>On/ Off</p> <hr/> <p><b>6240</b> _ _ / _ F<br/>Simultaneous line<br/>DALI, 1-10V, Push, Casambi</p> <hr/> <p><b>6240</b> _ _ / _ Z<br/>Casambi integrated on each individual luminaire (P2P)</p> <hr/> <p><b>Packaging</b></p> <p>0,727 x 0,727 x 0,32 m<br/>Vol 0,1691 m³<br/>Gross weight 5 Kg Net weight 2,5 Kg</p> <p>    </p> <p> </p>     |
| <p><b>6245</b></p>  | <p><b>Finishes</b></p> <ul style="list-style-type: none"><li>11/ _ _ Black (NCS S 8500-N)</li><li>13/ _ _ Off-White (NCS S 1000-N)</li><li>37/ _ _ Terra Red (NCS S 4040-Y70R)</li><li>42/ _ _ Blue M1 (NCS S 5010-B10G)</li><li>53/ _ _ Green M1 (NCS S 6005-G80Y)</li></ul> <p><b>LED temperature colour</b></p> <ul style="list-style-type: none"><li>/1 _ 2700 K  CRI &gt;90 1492 lm 93,25 lm/W</li><li>/2 _ 3000 K  CRI &gt;90 1569 lm 98,06 lm/W</li><li>/3 _ 3500 K  CRI &gt;90 1606 lm 100,38 lm/W</li></ul> <p><b>Materials</b></p> <p>Shade: Aluminum.<br/>Diffuser: Triplex opal glass.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED 16 W 850 mA</p> | <p><b>Control</b></p> <p><b>6245</b> _ _ / _ 0<br/>On/ Off</p> <hr/> <p><b>6245</b> _ _ / _ F<br/>Simultaneous line<br/>DALI, 1-10V, Push, Casambi</p> <hr/> <p><b>6245</b> _ _ / _ Z<br/>Casambi integrated on each individual luminaire (P2P)</p> <hr/> <p><b>Packaging</b></p> <p>1 Box 0,96 x 0,96 x 0,27 m<br/>Vol 0,2488 m³<br/>Gross weight 7 Kg Net weight 3,5 Kg</p> <p>    </p> <p> </p> |

## Spotlight



Ø 10 cm

6200



Ø 10 cm


6205 6210



Ø 10 cm

6215

### 6200



#### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 13/ \_ \_ Off-White (NCS S 1000-N)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
- 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

#### LED temperature colour

- /1 \_ 2700 K CRI >90 846 lm 107,09 lm/W
- /2 \_ 3000 K CRI >90 884 lm 111,9 lm/W
- /3 \_ 3500 K CRI >90 916 lm 115,95 lm/W

#### Control

- 6200 \_ \_ / \_ 0 On/ Off
- 6200 \_ \_ / \_ F Simultaneous line DALI, 1-10V, Push, Casambi
- 6200 \_ \_ / \_ Z Casambi integrated on each individual luminaire (P2P)

#### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

Light Source and electronics  
1 x LED 7,9 W 450 mA

#### Packaging


1 Box 0,193 x 0,161 x 0,148 m  
Vol 0,0046 m³  
Gross weight 0,719 Kg Net weight 0,51 Kg



Bi-volt Dimmer

### 6205

Medium flood 24°



#### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 13/ \_ \_ Off-White (NCS S 1000-N)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
- 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

#### LED temperature colour

- /1 \_ 2700 K CRI >90 846 lm 107,09 lm/W
- /2 \_ 3000 K CRI >90 884 lm 111,9 lm/W
- /3 \_ 3500 K CRI >90 916 lm 115,95 lm/W

#### Control

- 6205 \_ \_ / \_ 0 On/ Off
- 6205 \_ \_ / \_ F Simultaneous line DALI, 1-10V, Push, Casambi
- 6205 \_ \_ / \_ Z Casambi integrated on each individual luminaire (P2P)

#### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

Light Source and electronics  
1 x LED 7,9 W 450 mA

#### Packaging

1 Box 0,193 x 0,161 x 0,148 m  
Vol 0,0046 m³  
Gross weight 0,719 Kg Net weight 0,51 Kg



Bi-volt Dimmer

# Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website [vibia.com](http://vibia.com)


|      |                           |                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                 |
|------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6210 | <div>Wide flood 55°</div> | <div>Finishes</div> <div><div><div></div>11/ _ _ Black<br/>(NCS S 8500-N)</div><div><div></div>13/ _ _ Off-White<br/>(NCS S 1000-N)</div><div><div></div>37/ _ _ Terra Red<br/>(NCS S 4040-Y70R)</div><div><div></div>42/ _ _ Blue M1<br/>(NCS S 5010-B10G)</div><div><div></div>53/ _ _ Green M1<br/>(NCS S 6005-G80Y)</div></div> | <div>LED temperature colour</div> <div><div>/1 _ 2700 K </div><div>CRI &gt;90 846 lm 107,09 lm/W</div><div>/2 _ 3000 K </div><div>CRI &gt;90 884 lm 111,9 lm/W</div><div>/3 _ 3500 K </div><div>CRI &gt;90 916 lm 115,95 lm/W</div></div>                           | <div>Control</div> <div>6210 _ _ / _ 0<br/>On/ Off</div> <div>6210 _ _ / _ F<br/>Simultaneous line<br/>DALI, 1-10V, Push, Casambi</div> <div>6210 _ _ / _ Z<br/>Casambi integrated on each<br/>individual luminaire (P2P)</div> |
|      |                           | <div>Materials</div> <div>Shade: Aluminum.<br/>Diffuser: Polycarbonate.</div> <div>Light Source and electronics</div> <div>1 x LED 7,9 W 450 mA</div>                                                                                                                                                                               | <div>Packaging</div> <div>1 Box 0,193 x 0,161 x 0,148 m<br/>Vol 0,0046 m³<br/>Gross weight 0,719 Kg Net weight 0,51 Kg</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div></div> <div><div>Bi-volt</div><div>Dimmer</div></div> |                                                                                                                                                                                                                                 |

|      |                                        |                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                 |
|------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6215 | <div>Directed diffusion lighting</div> | <div>Finishes</div> <div><div><div></div>11/ _ _ Black<br/>(NCS S 8500-N)</div><div><div></div>13/ _ _ Off-White<br/>(NCS S 1000-N)</div><div><div></div>37/ _ _ Terra Red<br/>(NCS S 4040-Y70R)</div><div><div></div>42/ _ _ Blue M1<br/>(NCS S 5010-B10G)</div><div><div></div>53/ _ _ Green M1<br/>(NCS S 6005-G80Y)</div></div> | <div>LED temperature colour</div> <div><div>/1 _ 2700 K </div><div>CRI &gt;90 491 lm 116,9 lm/W</div><div>/2 _ 3000 K </div><div>CRI &gt;90 513 lm 122,14 lm/W</div><div>/3 _ 3500 K </div><div>CRI &gt;90 532 lm 126,67 lm/W</div></div>                           | <div>Control</div> <div>6215 _ _ / _ 0<br/>On/ Off</div> <div>6215 _ _ / _ F<br/>Simultaneous line<br/>DALI, 1-10V, Push, Casambi</div> <div>6215 _ _ / _ Z<br/>Casambi integrated on each<br/>individual luminaire (P2P)</div> |
|      |                                        | <div>Materials</div> <div>Shade: Aluminum.<br/>Diffuser: Polycarbonate.</div> <div>Light Source and electronics</div> <div>1 x LED 4,2 W 250 mA</div>                                                                                                                                                                               | <div>Packaging</div> <div>1 Box 0,193 x 0,161 x 0,148 m<br/>Vol 0,0046 m³<br/>Gross weight 0,719 Kg Net weight 0,51 Kg</div> <div><div>LED</div><div></div><div>IP20</div><div></div><div>EAC</div><div></div></div> <div><div>Bi-volt</div><div>Dimmer</div></div> |                                                                                                                                                                                                                                 |


Accent lighting



Directed diffusion lighting

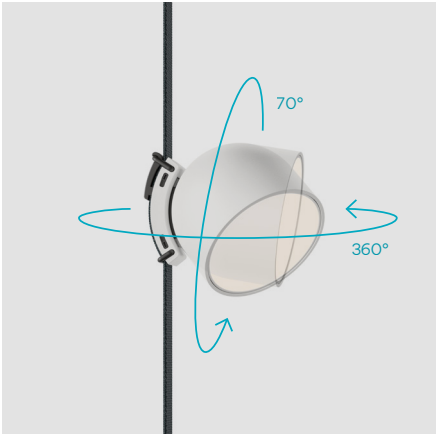

## Linear diffuser

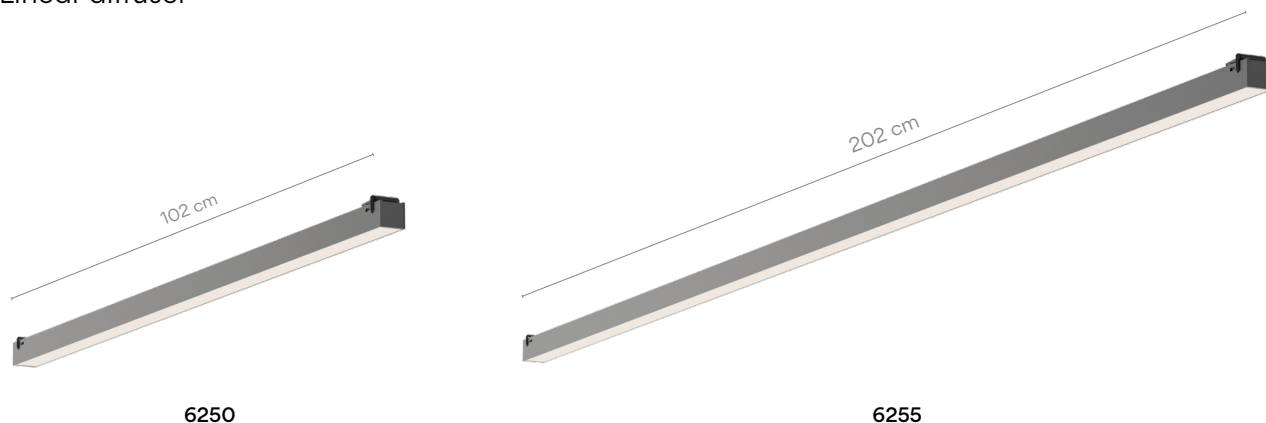

### 6250



#### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 13/ \_ \_ Off-White (NCS S 1000-N)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
- 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

#### LED temperature colour

- /1 \_ 2700 K CRI >90 2544 lm 123,5 lm/W
- /2 \_ 3000 K CRI >90 2628 lm 127,57 lm/W
- /3 \_ 3500 K CRI >90 2712 lm 131,65 lm/W

#### Control

- 6250 \_ \_ / \_ 0 On/ Off
- 6250 \_ \_ / \_ F Simultaneous line DALI, 1-10V, Push, Casambi
- 6250 \_ \_ / \_ Z Casambi integrated on each individual luminaire (P2P)

#### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

#### Light Source and electronics

1 x LED STRIP 20,6 W 24 V

#### Packaging

1 Box 0,06 x 0,06 x 1,25 m  
Vol 0,0057 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20

Bi-volt Dimmer

### 6255



#### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 13/ \_ \_ Off-White (NCS S 1000-N)
- 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
- 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
- 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

#### LED temperature colour

- /1 \_ 2700 K CRI >90 5088 lm 123,5 lm/W
- /2 \_ 3000 K CRI >90 5256 lm 127,57 lm/W
- /3 \_ 3500 K CRI >90 5424 lm 131,65 lm/W

#### Control

- 6255 \_ \_ / \_ 0 On/ Off
- 6255 \_ \_ / \_ F Simultaneous line DALI, 1-10V, Push, Casambi
- 6255 \_ \_ / \_ Z Casambi integrated on each individual luminaire (P2P)

#### Materials

Shade: Aluminum.  
Diffuser: Polycarbonate.

#### Light Source and electronics

1 x LED STRIP 41,3 W 24 V

#### Packaging


1 Box 0,06 x 0,06 x 2,24 m  
Vol 0,0103 m<sup>3</sup>  
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20

Bi-volt Dimmer




Linear Low UGR  
High-Comfort

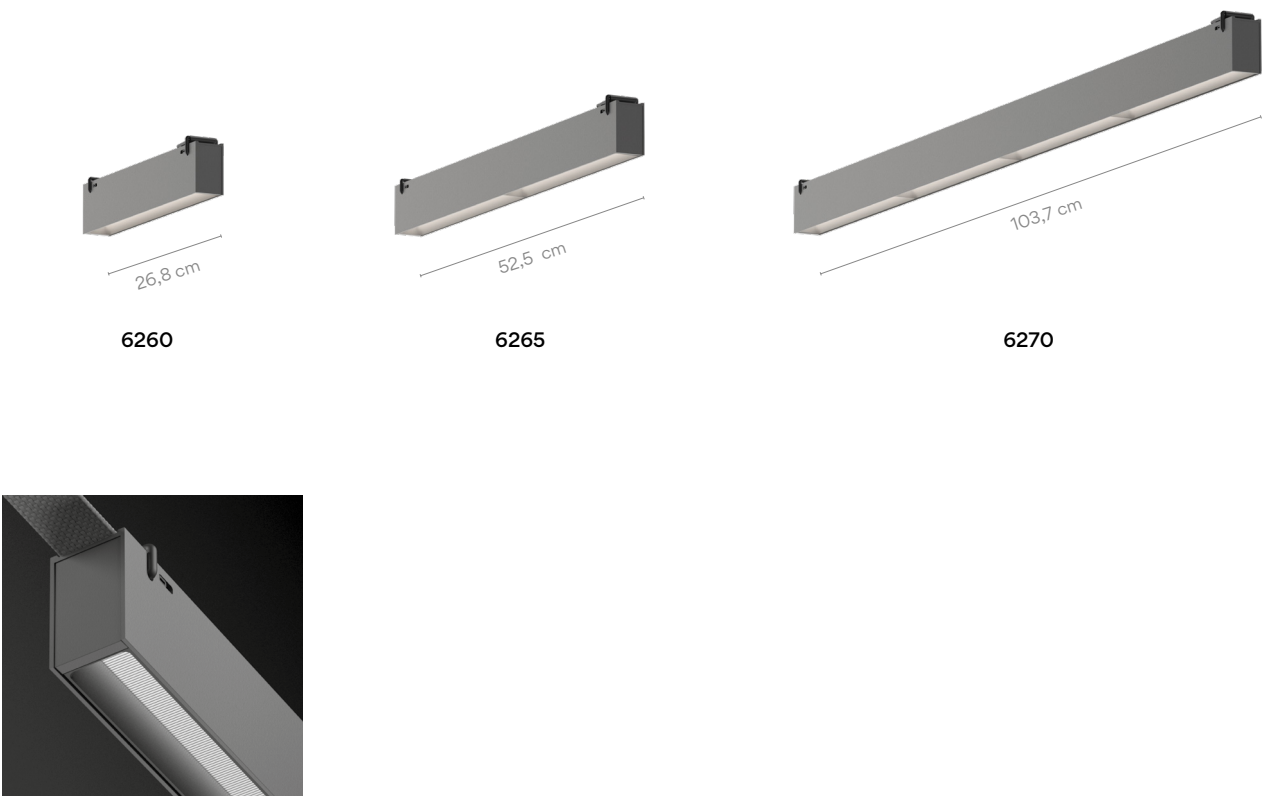

|                                                                                                                                                                                                                                                                        |  |                                                                                                                                                                                                                                                                                             |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 6260                                                                                                                                                                                                                                                                   |  |                                                                                                                                                                                                                                                                                             |  |
|                                                                                                                                                                                                                                                                        |  |                                                                                                                                                                                                                                                                                             |  |
| <b>Finishes</b> <ul style="list-style-type: none"><li>11/ _ _ Black (NCS S 8500-N)</li><li>13/ _ _ Off-White (NCS S 1000-N)</li><li>37/ _ _ Terra Red (NCS S 4040-Y70R)</li><li>42/ _ _ Blue M1 (NCS S 5010-B10G)</li><li>53/ _ _ Green M1 (NCS S 6005-G80Y)</li></ul> |  | <b>LED temperature colour</b> <ul style="list-style-type: none"><li>/1 _ 2700 K  CRI &gt;90 1281 lm 124,37 lm/W</li><li>/2 _ 3000 K  CRI &gt;90 1323 lm 128,45 lm/W</li><li>/3 _ 3500 K  CRI &gt;90 1366 lm 132,62 lm/W</li></ul>                                                           |  |
|                                                                                                                                                                                                                                                                        |  | <b>Control</b> <ul style="list-style-type: none"><li>6260 _ _ / _ 0 On/ Off</li><li>6260 _ _ / _ F Simultaneous line DALI, 1-10V, Push, Casambi</li><li>6260 _ _ / _ Z Casambi integrated on each individual luminaire (P2P)</li></ul>                                                      |  |
| <b>Materials</b> <p>Shade: Aluminum.<br/>Diffuser: PET.</p> <p>Light Source and electronics</p> <p>1 x LED STRIP 20,6 W 24 V</p>                                                                                                                                       |  | <b>Packaging</b> <p>1 Box 0,08 x 0,11 x 0,32 m<br/>Vol 0,0028 m³<br/>Gross weight 0,8 Kg Net weight 0,41 Kg</p> <p><b>Notes</b><br/>UGR &lt;19</p> <div><div>LED</div><div></div><div>IP20</div><div>CE</div><div>EAC</div><div></div></div> <div><div>Bi-volt</div><div>Dimmer</div></div> |  |

## 6265



### Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **13/** \_ \_ Off-White  
(NCS S 1000-N)
- **37/** \_ \_ Terra Red  
(NCS S 4040-Y70R)
- **42/** \_ \_ Blue M1  
(NCS S 5010-B10G)
- **53/** \_ \_ Green M1  
(NCS S 6005-G80Y)

### LED temperature colour

- /1** \_ 2700 K CRI >90 2562 lm 124,37 lm/W
- /2** \_ 3000 K CRI >90 2647 lm 128,5 lm/W
- /3** \_ 3500 K CRI >90 2731 lm 132,57 lm/W

### Control

- 6265** \_ \_ / \_ **0**  
On/ Off
- 6265** \_ \_ / \_ **F**  
Simultaneous line  
DALI, 1-10V, Push, Casambi
- 6265** \_ \_ / \_ **Z**  
Casambi integrated on each  
individual luminaire (P2P)

### Materials

Shade: Aluminum.  
Diffuser: PET.

### Light Source and electronics

1 x LED STRIP 20,6 W 24 V

### Packaging


1 Box 0,08 x 0,11 x 0,57 m  
Vol 0,0050 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 0,89 Kg

### Notes

UGR <19



## 6270



### Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **13/** \_ \_ Off-White  
(NCS S 1000-N)
- **37/** \_ \_ Terra Red  
(NCS S 4040-Y70R)
- **42/** \_ \_ Blue M1  
(NCS S 5010-B10G)
- **53/** \_ \_ Green M1  
(NCS S 6005-G80Y)

### LED temperature colour

- /1** \_ 2700 K CRI >90 5124 lm 124,07 lm/W
- /2** \_ 3000 K CRI >90 5293 lm 128,16 lm/W
- /3** \_ 3500 K CRI >90 5462 lm 132,25 lm/W

### Control

- 6270** \_ \_ / \_ **0**  
On/ Off
- 6270** \_ \_ / \_ **F**  
Simultaneous line  
DALI, 1-10V, Push, Casambi
- 6270** \_ \_ / \_ **Z**  
Casambi integrated on each  
individual luminaire (P2P)

### Materials

Shade: Aluminum.  
Diffuser: PET.

### Light Source and electronics

1 x LED STRIP 41,3 W 24 V

### Packaging


1 Box 0,08 x 0,11 x 1,10 m  
Vol 0,0096 m<sup>3</sup>  
Gross weight 2,5 Kg Net weight 1,5 Kg

### Notes


UGR <19



Linear Low UGR  
High-Efficiency

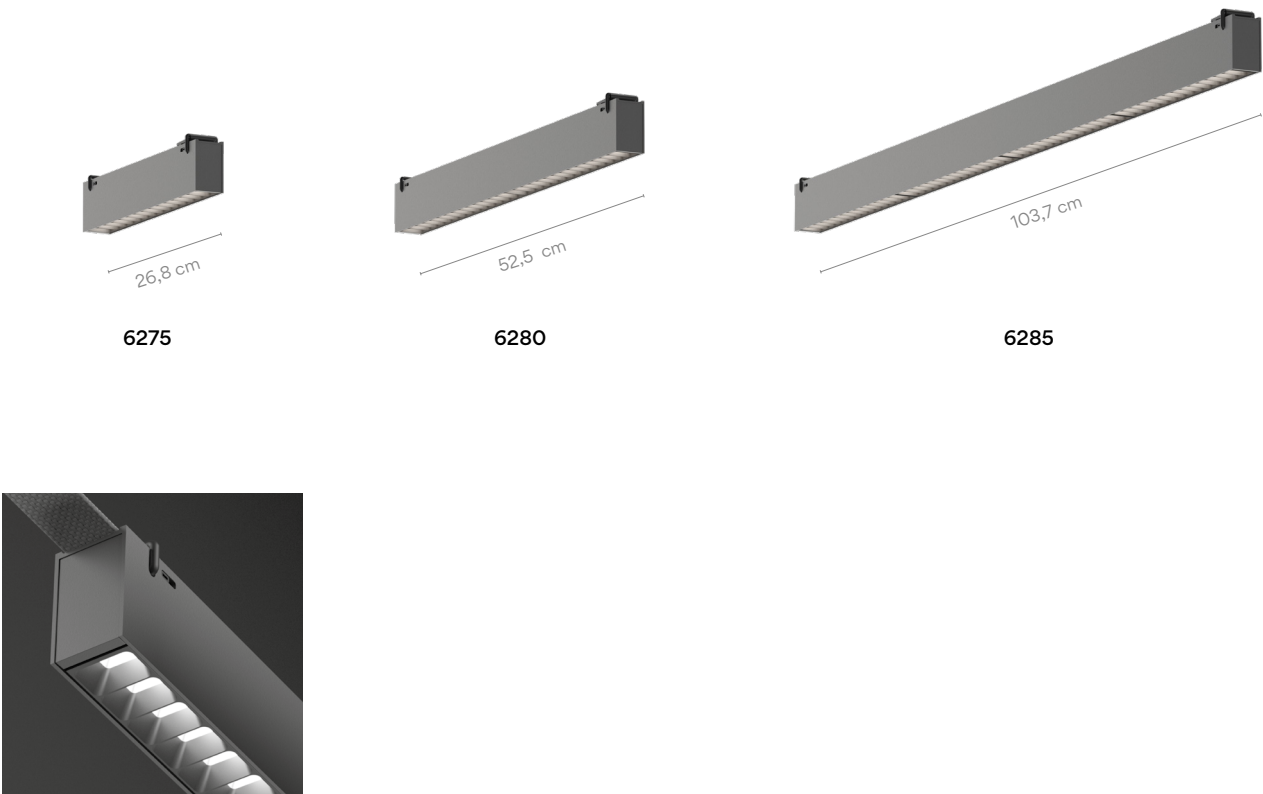

6275



- Finishes
- 11/ \_ \_ Black (NCS S 8500-N)
  - 13/ \_ \_ Off-White (NCS S 1000-N)
  - 37/ \_ \_ Terra Red (NCS S 4040-Y70R)
  - 42/ \_ \_ Blue M1 (NCS S 5010-B10G)
  - 53/ \_ \_ Green M1 (NCS S 6005-G80Y)

- LED temperature colour
- /1 \_ 2700 K  CRI >90 1281 lm 124,37 lm/W
  - /2 \_ 3000 K  CRI >90 1323 lm 128,45 lm/W
  - /3 \_ 3500 K  CRI >90 1366 lm 132,62 lm/W

- Control
- 6275 \_ \_ / \_ 0 On/ Off
  - 6275 \_ \_ / \_ F Simultaneous line DALI, 1-10V, Push, Casambi
  - 6275 \_ \_ / \_ Z Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 10,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,32 m

Vol 0,0028 m³

Gross weight 0,8 Kg Net weight 0,41 Kg

- Notes
- UGR <19
-   IP20  CE  EAC 
-  Bi-volt  Dimmer

## 6280



- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **13/** \_ \_ Off-White  
(NCS S 1000-N)
  - **37/** \_ \_ Terra Red  
(NCS S 4040-Y70R)
  - **42/** \_ \_ Blue M1  
(NCS S 5010-B10G)
  - **53/** \_ \_ Green M1  
(NCS S 6005-G80Y)

- LED temperature colour**
- /1** \_ 2700 K CRI >90 2562 lm 124,37 lm/W
  - /2** \_ 3000 K CRI >90 2647 lm 128,5 lm/W
  - /3** \_ 3500 K CRI >90 2731 lm 132,57 lm/W

- Control**
- 6280** \_ \_ / \_ **0**  
On/ Off
  - 6280** \_ \_ / \_ **F**  
Simultaneous line  
DALI, 1-10V, Push, Casambi
  - 6280** \_ \_ / \_ **Z**  
Casambi integrated on each  
individual luminaire (P2P)

### Materials

Shade: Aluminum.

### Light Source and electronics

1 x LED STRIP 20,6 W 24 V

### Packaging

1 Box 0,08 x 0,11 x 0,57 m  
Vol 0,0050 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 0,89 Kg

### Notes

UGR <19



## 6285



- Finishes**
- **11/** \_ \_ Black  
(NCS S 8500-N)
  - **13/** \_ \_ Off-White  
(NCS S 1000-N)
  - **37/** \_ \_ Terra Red  
(NCS S 4040-Y70R)
  - **42/** \_ \_ Blue M1  
(NCS S 5010-B10G)
  - **53/** \_ \_ Green M1  
(NCS S 6005-G80Y)

- LED temperature colour**
- /1** \_ 2700 K CRI >90 5124 lm 124,07 lm/W
  - /2** \_ 3000 K CRI >90 5293 lm 128,16 lm/W
  - /3** \_ 3500 K CRI >90 5462 lm 132,25 lm/W

- Control**
- 6285** \_ \_ / \_ **0**  
On/ Off
  - 6285** \_ \_ / \_ **F**  
Simultaneous line  
DALI, 1-10V, Push, Casambi
  - 6285** \_ \_ / \_ **Z**  
Casambi integrated on each  
individual luminaire (P2P)

### Materials

Shade: Aluminum.

### Light Source and electronics

1 x LED STRIP 41,3 W 24V

### Packaging

1 Box 0,08 x 0,11 x 1,102 m  
Vol 0,0096 m<sup>3</sup>  
Gross weight 2,5 Kg Net weight 1,5 Kg


### Notes

UGR <19




# Accessories Toolbox

Thought out to the smallest detail.  
Receive your personalised accessories  
toolbox for a quick and easy installation.

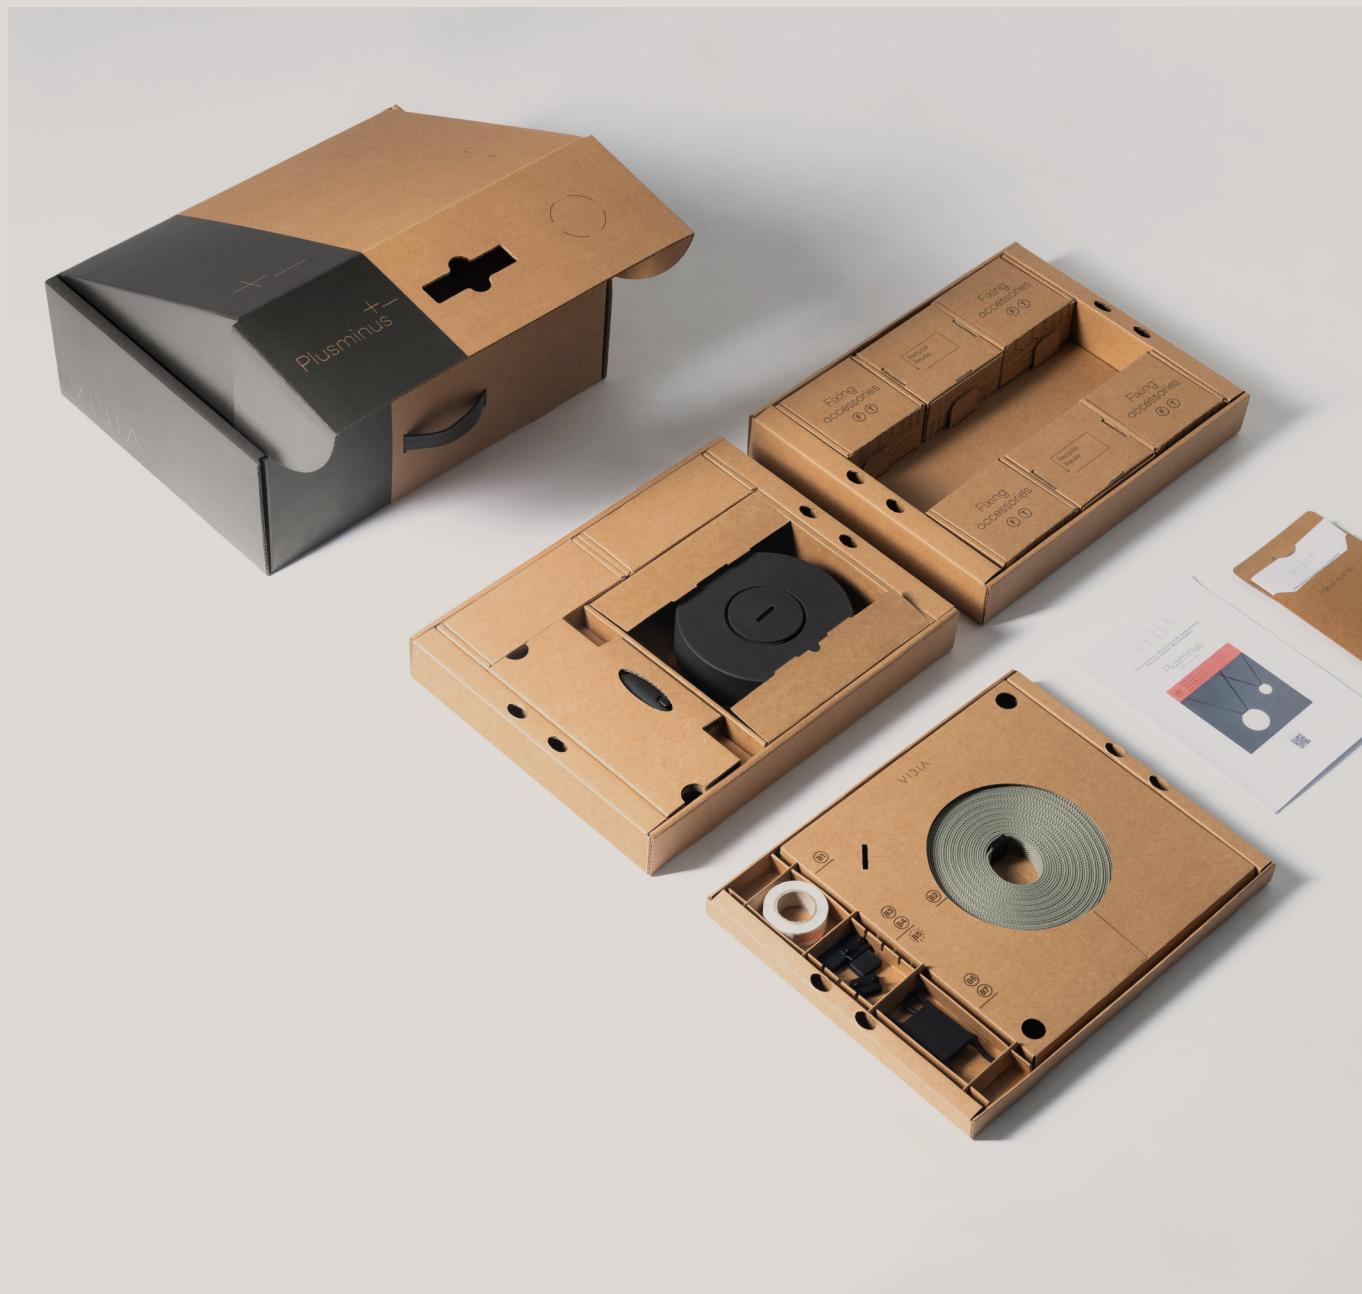


# Installation accessories


You will receive a personalised accessories toolbox per every composition made at vibia.com. The Toolbox includes some extra units for on-site adjustments.

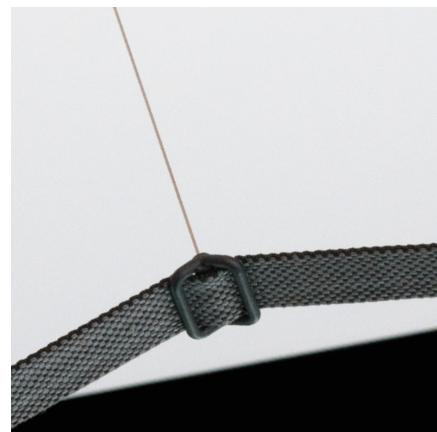


## Belt terminations options



**B3**  
Belt End Cap




**B4**  
Double End Cap




**B5**  
Pendant End Cap


## Fasten accessories options



**F1**  
Circular Ratchet




**F2**  
Circular Anchor



**F3**  
Belt Support



**F4**  
Counterweight




**F5**  
Corner Support




**F6**  
Freestyle Bar  
2 m. bar length  
5 m. maximum tensor cable


## Tension clips options



**T1**  
Suspension Clip



**T2**  
V-Tension Clip



**T3**  
Parallel Tension Clip S




**T4**  
Parallel Tension Clip M



**T5**  
Cable End Cap



**T6**  
Pendant Cable S



**T7**  
Pendant Cable M

### Materials

Counterweight: Cast iron

### Finishes

11 Black (NCS S 0300-N)



# Electrical connection options

Choose your preferred installation option according to your needs.




Surface




Built-in



Remote  
Built-in



Surface



Plug



Optional wire  
connector

## Dimming control options

Choose your preferred installation option according to your needs.

### Dimming Control

### Electrical Connection



|                                                       | Surface<br>25 - 240 W | Built-in<br>25 - 240 W | Remote<br>25 - 240 W | Plug<br>Max 60W |
|-------------------------------------------------------|-----------------------|------------------------|----------------------|-----------------|
| On/ Off                                               | ✓                     | ✓                      | ✓                    | ✓               |
| Push Switch                                           | —                     | —                      | —                    | ✓               |
| Push Simultaneous                                     | ✓                     | ✓                      | ✓                    | —               |
| 1-10V Simultaneous                                    | ✓                     | ✓                      | ✓                    | —               |
| DALI Simultaneous                                     | ✓                     | ✓                      | ✓                    | —               |
| Casambi Simultaneous                                  | ✓                     | ✓                      | ✓                    | —               |
| Casambi integrated on each individual luminaire (P2P) | ✓                     | ✓                      | ✓                    | ✓               |

|  |                                                                                                                                                                    |                                                                                                                                                                                                                                                                                    |                                                                                                                            |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
|  | <b>Surface Canopy S</b><br>E1 Ø 205 mm.<br><b>Wattage options:</b><br>< 60W.                                                                                       | <b>Driver</b> Constant Voltage 42V.<br>90-305 VAC. 100~240V. 50/60Hz.<br><b>Dimming options:</b><br>On/ Off.<br>Simultaneous line DALI / 1-10V / Push / Casambi.<br>Casambi integrated on each individual luminaire (P2P).<br><b>Body:</b> ABS.<br>Net weight 0,9 Kg.              | <b>11 Black</b><br>(NCS S 8500-N)<br><b>Dimmer</b> <b>Bi-volt</b>                                                          |
|  | <b>Surface Canopy M</b><br>E2 Ø 260 mm.<br><b>Wattage options:</b><br>>60W.<br><240W.                                                                              | <b>Driver</b> Constant Voltage 42V.<br>90-305 VAC. 100~240V. 50/60Hz.<br><b>Dimming options:</b><br>On/ Off.<br>Simultaneous line DALI / 1-10V / Push / Casambi.<br>Casambi integrated on each individual luminaire (P2P).<br><b>Body:</b> ABS.<br>Net weight 1,8 Kg.              | <b>11 Black</b><br>(NCS S 8500-N)<br><b>Dimmer</b> <b>Bi-volt</b>                                                          |
|  | <b>Built-in Canopy</b><br>E3 Ø 120 mm.<br><b>Wattage options:</b><br>>25W.<br><240W.                                                                               | <b>Driver</b> Constant Voltage 42V.<br>90-305 VAC. 100~240V. 50/60Hz.<br><b>Dimming options:</b><br>On/ Off.<br>Simultaneous line DALI / 1-10V / Push / Casambi.<br>Casambi integrated on each individual luminaire (P2P).<br><b>Body:</b> ABS.<br>Net weight 1,08 - 1,860 Kg.     | <b>11 Black</b><br>(NCS S 8500-N)<br>25/40/60W<br><b>Dimmer</b> <b>Bi-volt</b><br>120/240W<br><b>Dimmer</b> <b>Bi-volt</b> |
|  | <b>Remote Built-in Canopy</b><br>E4 Ø 60 mm.<br><b>Wattage options:</b><br>>25W.<br><240W.                                                                         | <b>Driver</b> Constant Voltage 42V.<br>90-305 VAC. 100~240V. 50/60Hz.<br><b>Dimming options:</b><br>On/ Off.<br>Simultaneous line DALI / 1-10V / Push / Casambi.<br>Casambi integrated on each individual luminaire (P2P).<br><b>Body:</b> ABS.<br>Net weight 0,87 - 1,65 Kg.      | <b>11 Black</b><br>(NCS S 8500-N)<br>25/40/60W<br><b>Dimmer</b> <b>Bi-volt</b><br>120/240W<br><b>Dimmer</b> <b>Bi-volt</b> |
|  | <b>Remote Surface Canopy</b><br>E5 Ø 60 mm.<br><b>Wattage options:</b><br>>25W.<br><240W.                                                                          | <b>Driver</b> Constant Voltage 42V.<br>90-305 VAC. 100~240V. 50/60Hz.<br><b>Dimming options:</b><br>On/ Off.<br>Simultaneous line DALI / 1-10V / Push / Casambi.<br>Casambi integrated on each individual luminaire (P2P).<br><b>Body:</b> Aluminum.<br>Net weight 0,95 - 1,73 Kg. | <b>11 Black</b><br>(NCS S 8500-N)<br>25/40/60W<br><b>Dimmer</b> <b>Bi-volt</b><br>120/240W<br><b>Dimmer</b> <b>Bi-volt</b> |
|  | <b>Plug-in Floor Switch</b><br>E6 Ø 90 mm.<br><b>Wattage options:</b><br>< 60W.                                                                                    | <b>Driver</b> Constant Voltage 42V.<br>90-305 VAC. 100~240V. 50/60Hz.<br><b>Dimming options:</b><br>On/ Off.<br>Push.<br>Casambi P2P.<br><b>Body:</b> ABS.                                                                                                                         | <b>11 Black</b><br>(NCS S 8500-N)<br><b>Dimmer</b> <b>Bi-volt</b>                                                          |
|  | <b>Wire Connector</b><br>E8 Ø 3,1 mm.<br><b>Wattage options:</b><br>< 60W.<br><b>Wire connector</b><br>E8 Ø 5,8 mm.<br><b>Wattage options:</b><br>< 60W.<br><240W. | <b>Driver</b> Constant Voltage 42V.<br>90-305 VAC. 50/60Hz.<br><b>Body:</b> ABS.                                                                                                                                                                                                   | <b>11 Black</b><br>(NCS S 8500-N)<br>                                                                                      |

# Belt

Maximum 30 metres per electrical connection, belt length personalised for each composition on [www.vibia.com](http://www.vibia.com)





| Finishes                            | Belt      | Fire Hazard Testing. GW-960.                                                                                          |
|-------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------|
| Black<br>Terra Red<br>Blue<br>Green | Polyester | fulfills the requirements of:<br>standards EN 60695-2-10:2013;<br>EN 60695-2-11:2015;<br>EN 60695-2-12:2011 / A1:2014 |

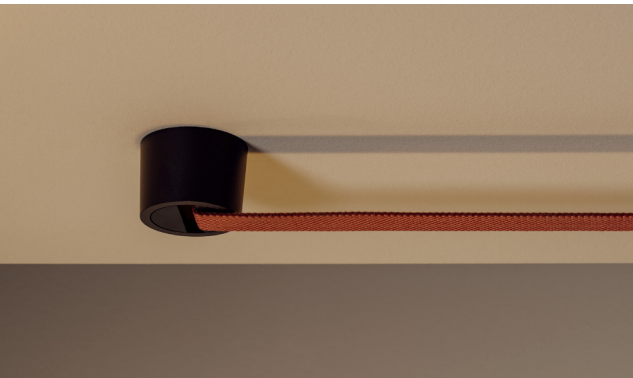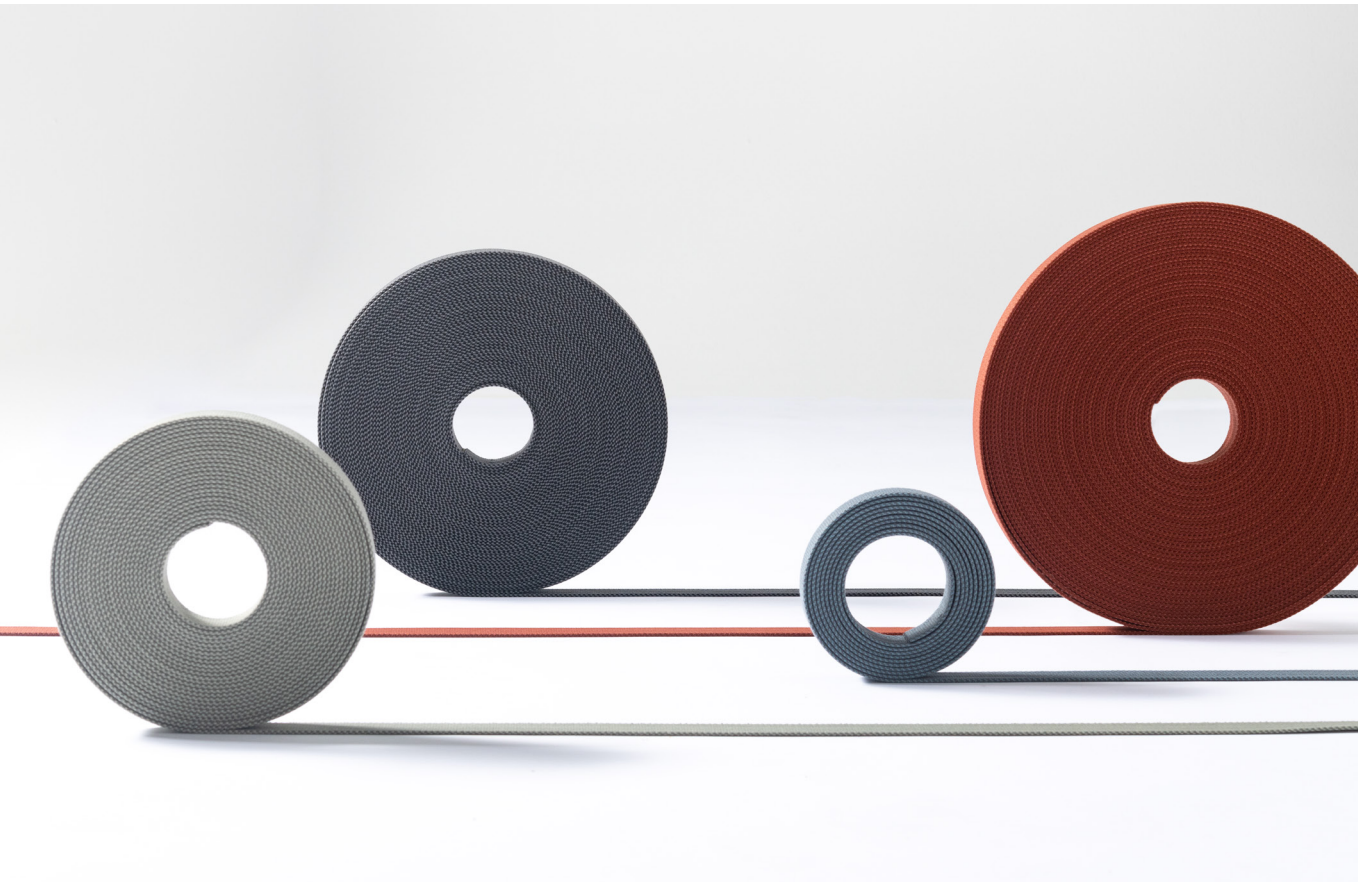

The distance of the belt from the wall or the ceiling, when installed in parallel, is always 4,5 cm.

# Belt terminations


Belt terminations can be adjusted during the installation process according to your preference.

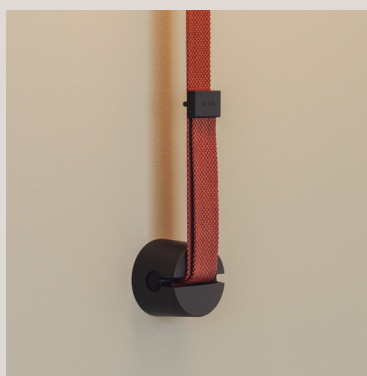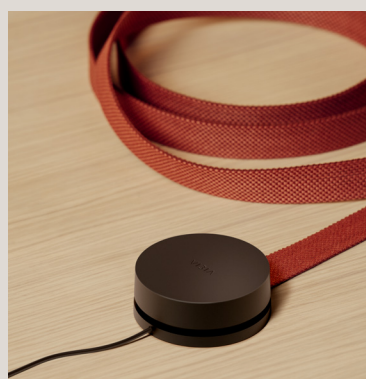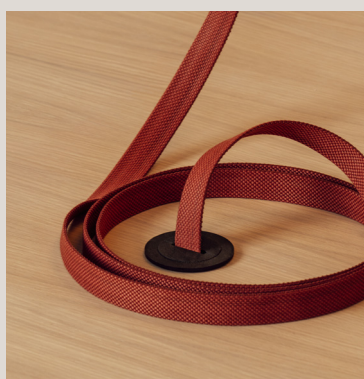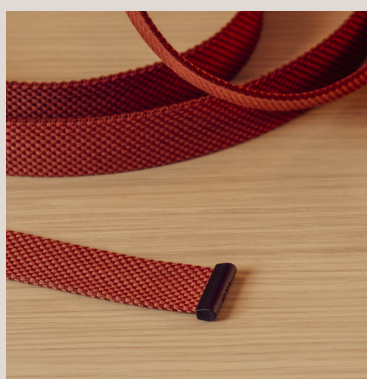


# Composition examples for orientative prices

The final price of the composition depends on the number of luminaires, belt length, dimming control and the electrical connection type chosen.


## Composition examples for orientative prices

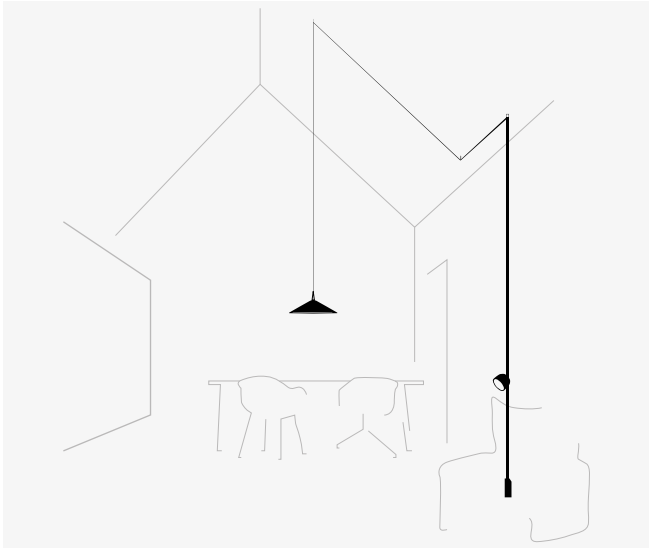


Sketch composed by one composition.  
2 luminaires: Cone 6240, Spotlight 6215.

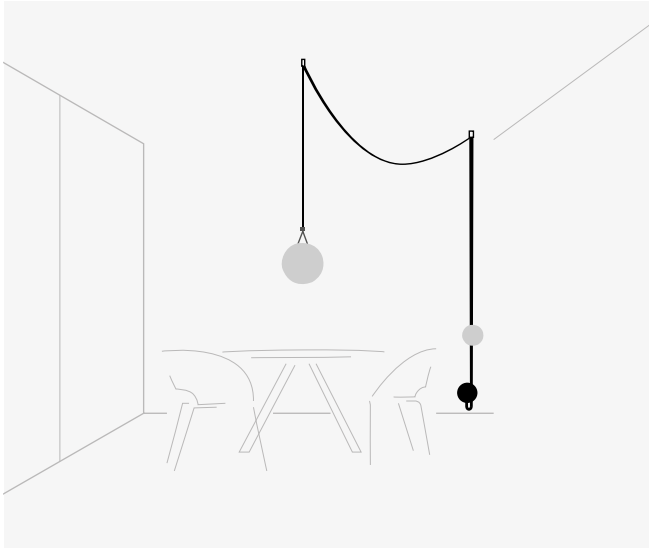

Sketch composed by one composition.  
2 luminaires: Sphere 6230, Sphere 6235.

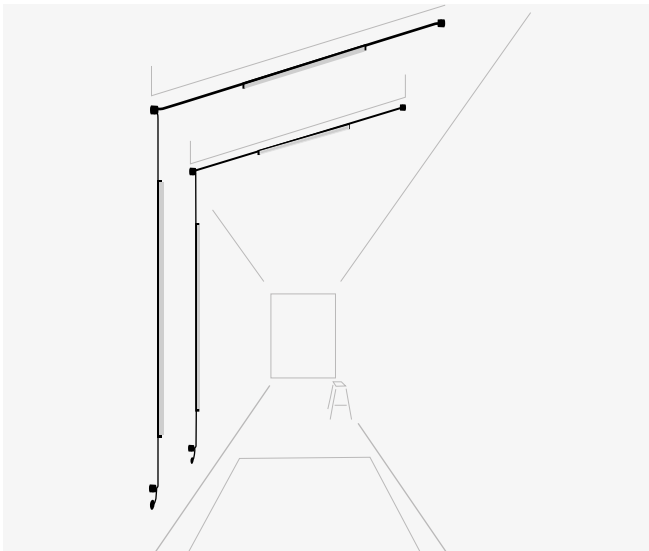

Sketch composed by two identical compositions.  
2 luminaires: Linear Diffuser 6250, Linear Diffuser 6255.

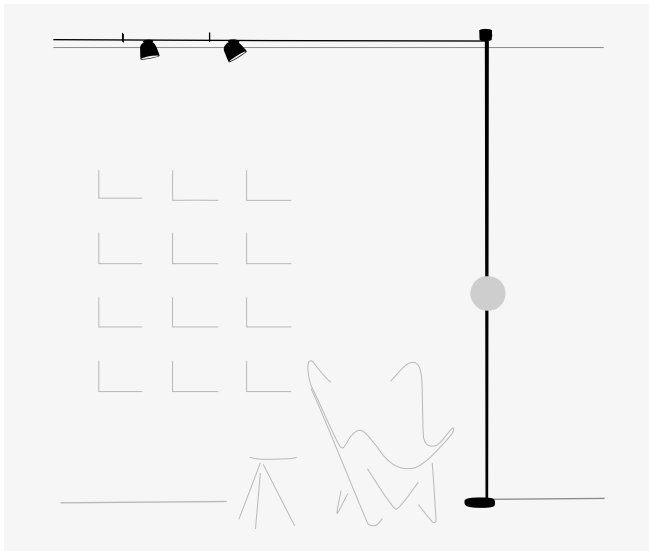


Sketch composed by one composition.  
3 luminaires: Spotlight 6205 x 2, Sphere 6230.




Sketch composed by one composition.

1 luminaire: Sphere 6230.

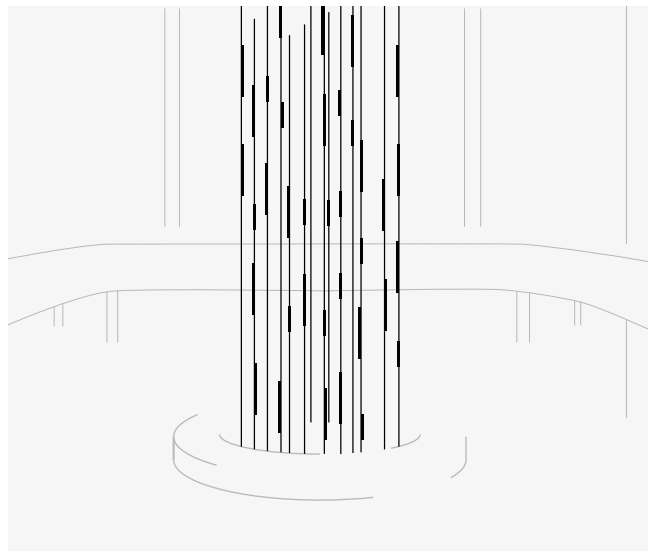


Sketch composed by several compositions.

3 luminaires: Linear Diffuser 6255.

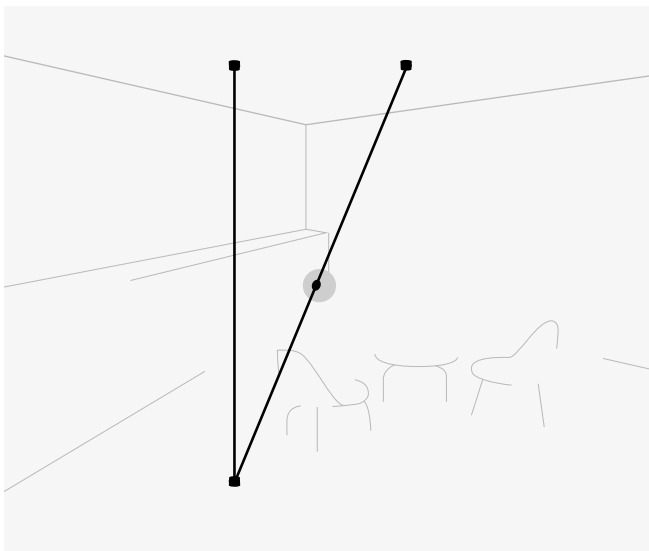

Sketch composed by one composition.

1 luminaire: Sphere 6230.

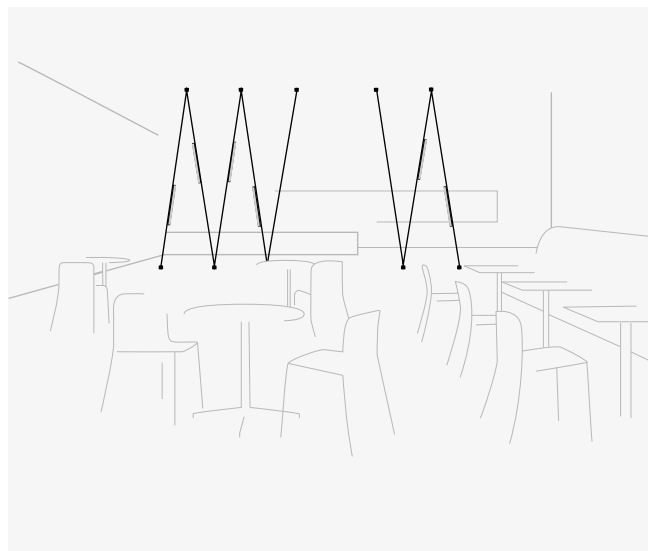


Sketch composed by two compositions.

2 luminaires: Linear Diffuser 6250.




Composition examples for orientative prices

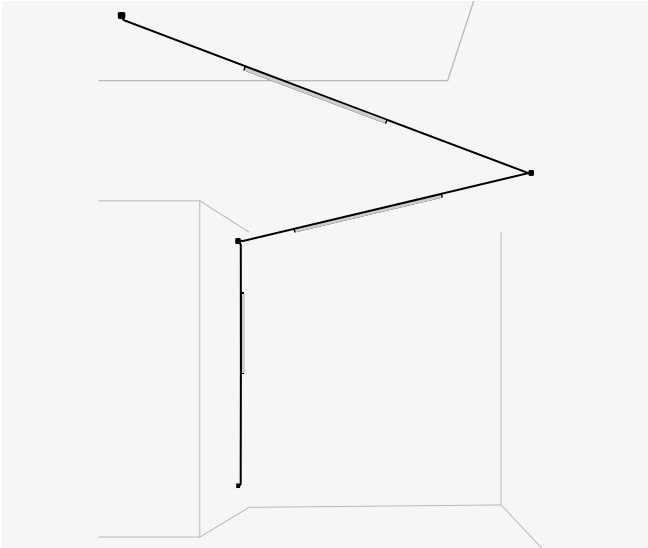


Sketch composed by one composition.

3 luminaires: Linear Diffuser 6250, Linear Diffuser 6255 x 2.

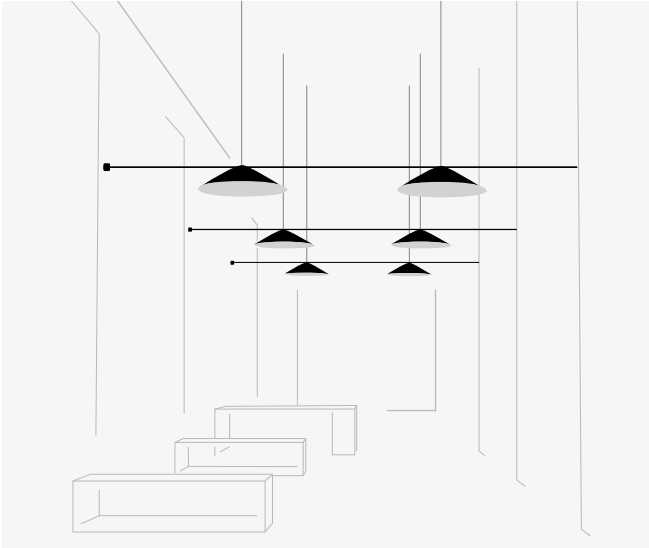


Sketch composed by three identical compositions.

2 luminaires: Cone 6245 x 2.

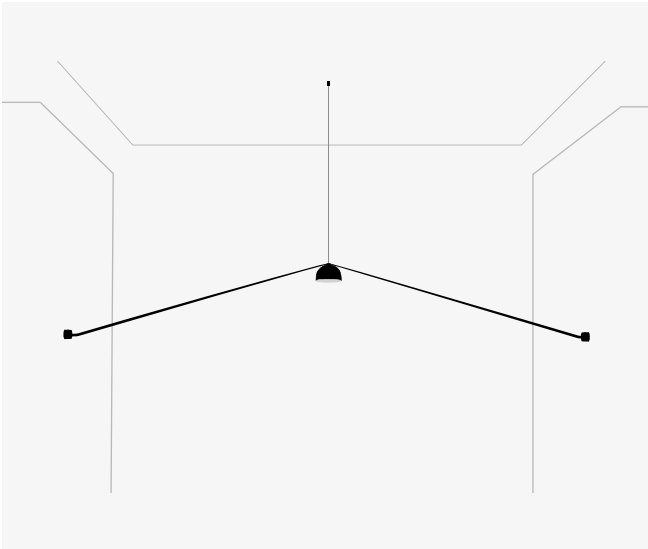


Sketch composed by one composition.

1 luminaire: Semisphere 6225.

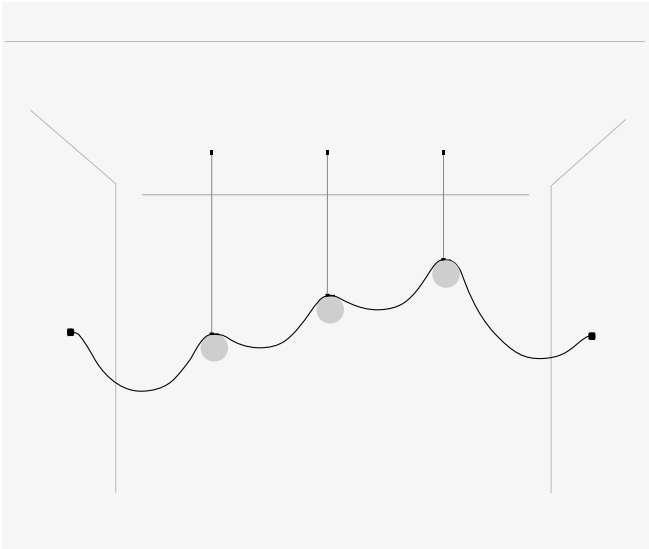


Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

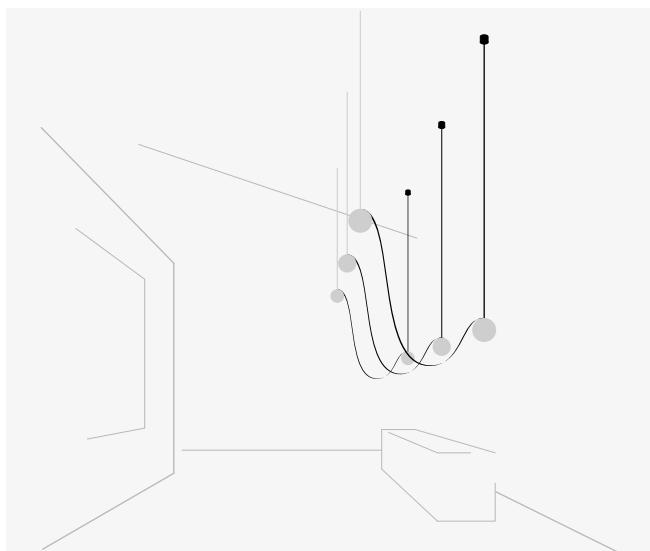


Sketch composed by three identical compositions.

2 luminaires: Sphere 6235 x 2.

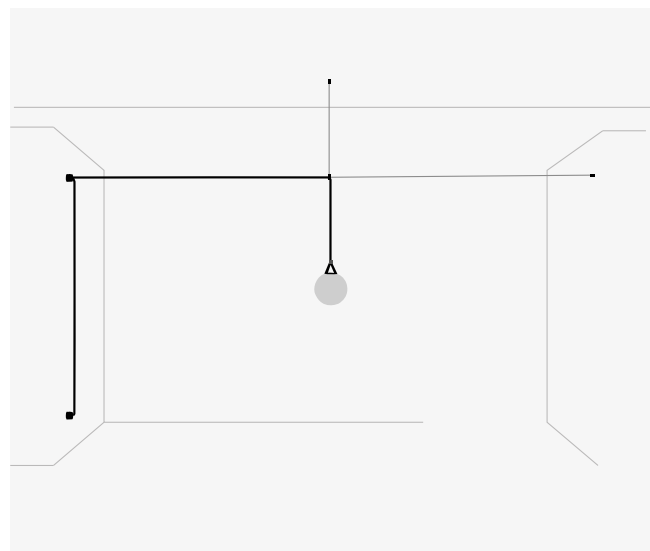


Sketch composed by one composition.

1 luminaire: Sphere 6235.

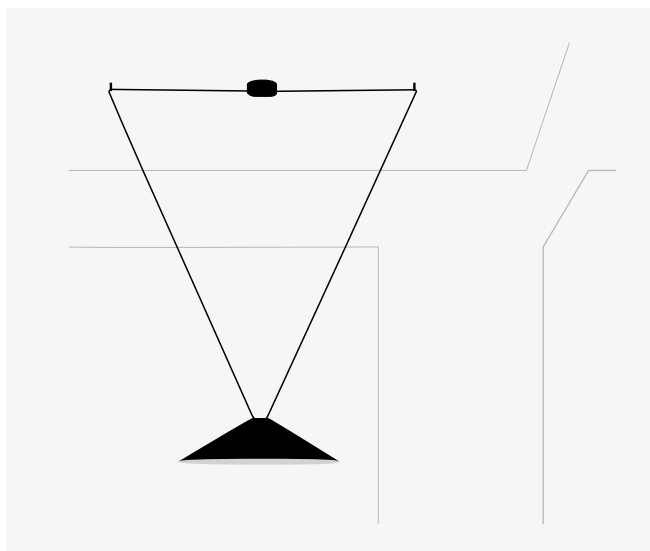

Sketch composed by one composition.


1 luminaire: Cone 6245.

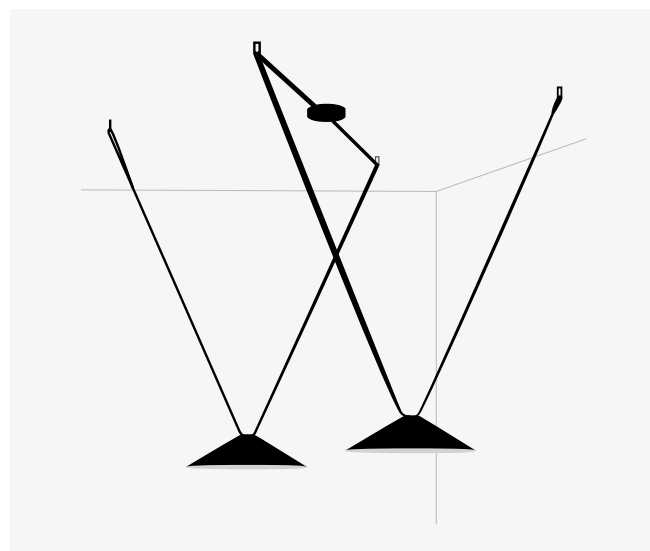

Sketch composed by one composition.

2 luminaires: Cone 6240 x 2.

Composition examples for orientative prices

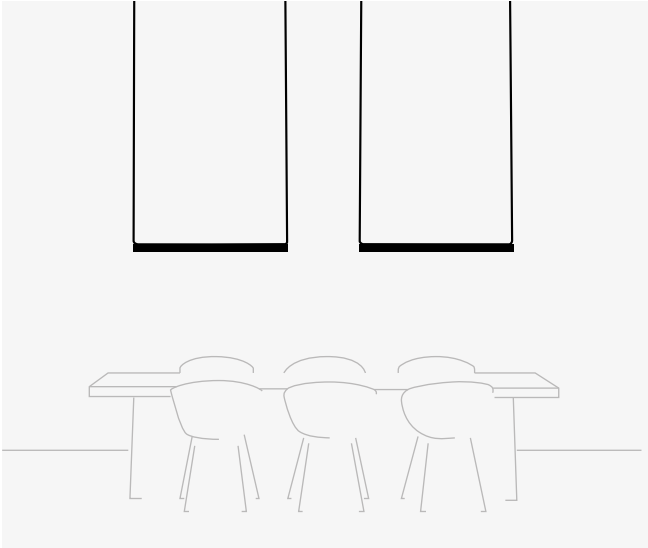


Sketch composed by one composition.

2 luminaires: Linear Low UGR High-Comfort 6270 x 2.




Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

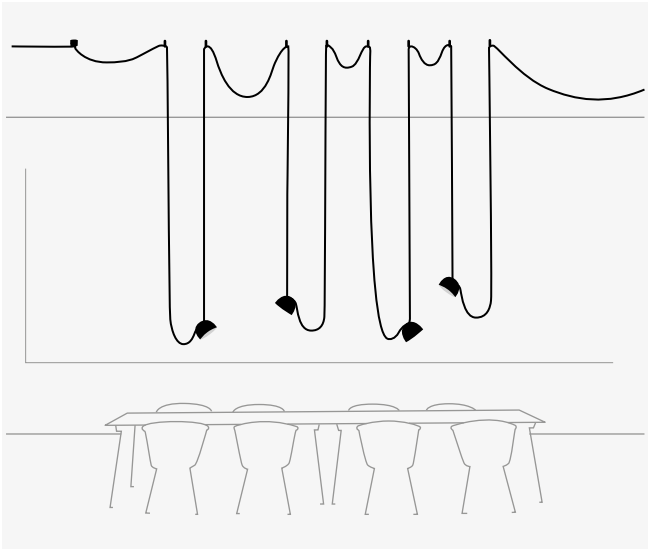


Sketch composed by one composition.

4 luminaires: Semisphere 6220 x 4.

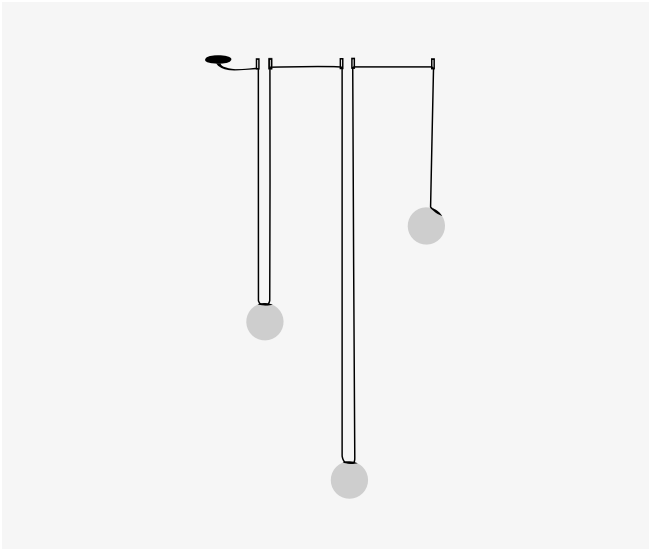


Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

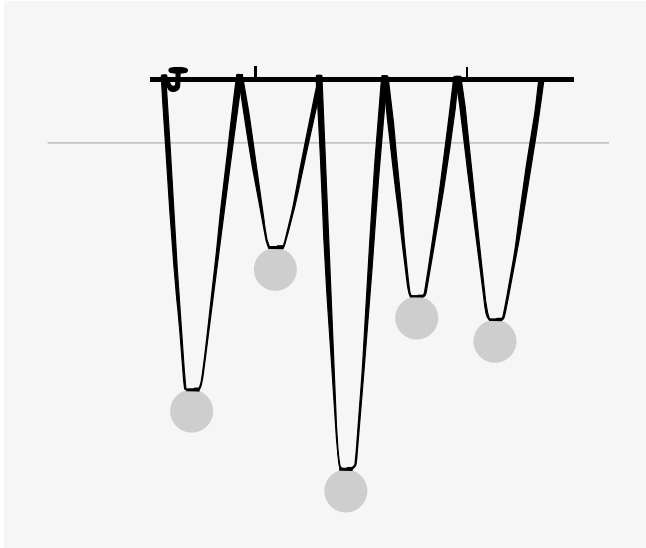

Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

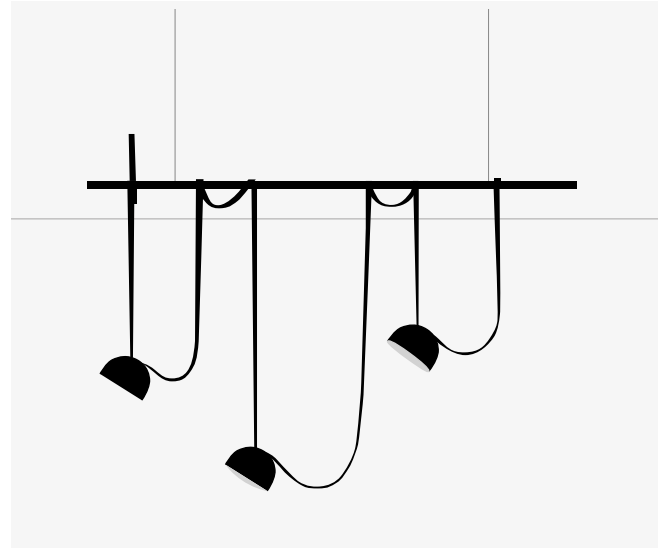

Sketch composed by one composition.

3 luminaires: Semisphere 6220 x 3.


Each project is unique.  
Visit [vibia.com](http://vibia.com) and chose among  
multiple compositions designed  
and adapted to your project needs.

Personalise your own Plusminus composition  
quick and easy at [vibia.com](http://vibia.com)

# Sticks Connectable


Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

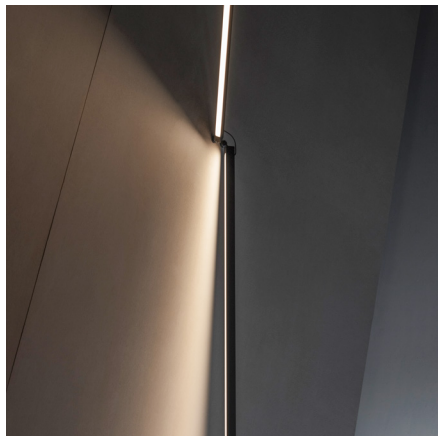


You can chose the desired composition through one of the following three options:

**A - Choose among pre-designed layouts the one that fits with your project and order it directly (see page 366).**

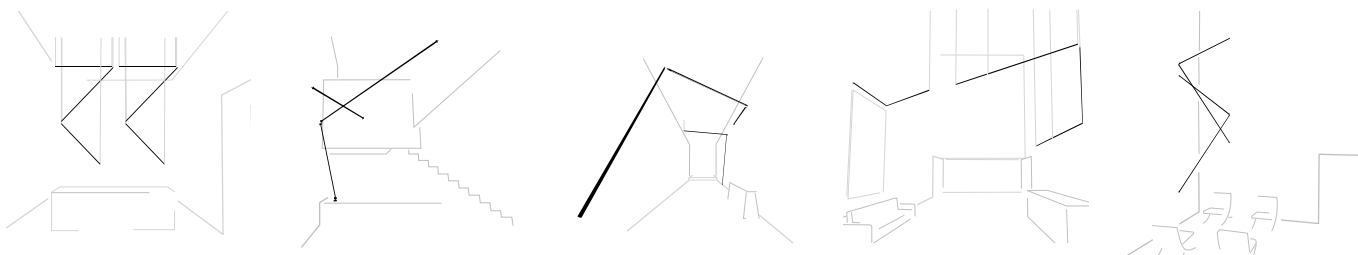

**B - Select one composition on [vibia.com](http://vibia.com) among multiple applications in spaces, and adjust it to your project by modifying:**

- + Length of the sticks.
- + Position of each stick in the space.
- + Colour temperature and dimming.
- + Installation type.

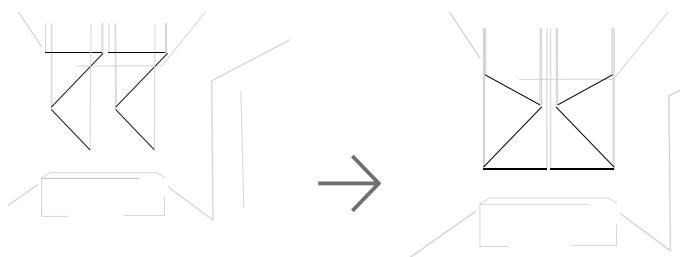

**C - Create your configuration on [vibia.com](http://vibia.com) from scratch in three easy steps, without sketches.**

1

Choose the location for your electrical connection point



2

Add connectable Sticks up to 6.5 meters



3

Configure  
+ Colour temperature  
+ Dimming control  
+ Installation type  
+ Pendants height




# Technical Specifications


(see page 376)

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m, and they can be connected one to each other to a total maximum length of 6.5 meters per electrical connection.


## Wall-Wall / Ceiling-Ceiling





## Wall-Wall (corner) / Wall-Ceiling




## Wall-Pendants




## Pendants-Pendants

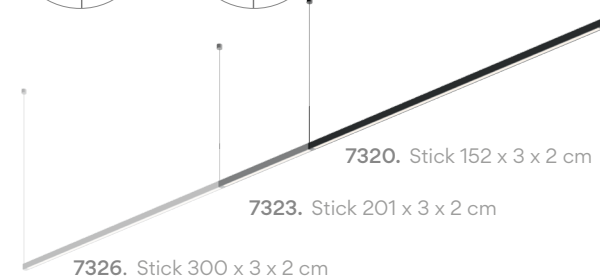

## Pendants



## Floor-Wall






# Sticks Connectable

Next sketches are composed by one or more compositions

## Pendant / Ceiling

---

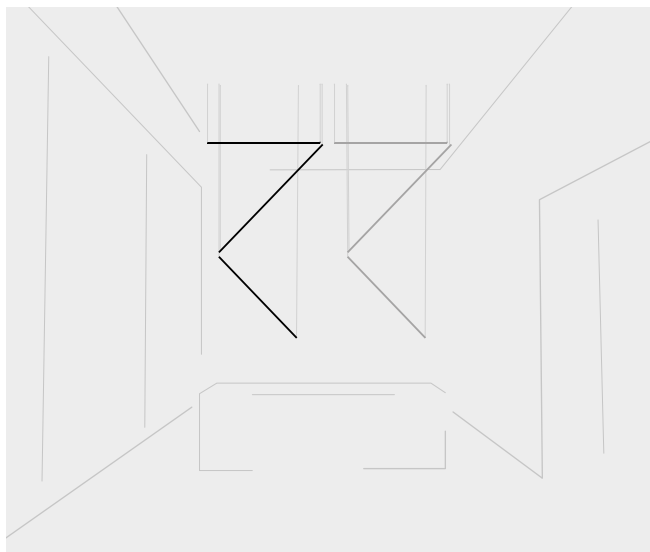

### STI001

Sketch composed by two identical compositions.


#### Each composition:

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.

LED 4000 K. 11870 lm. 88 W.

Remote driver Built-in Micro. 1-10V.

---

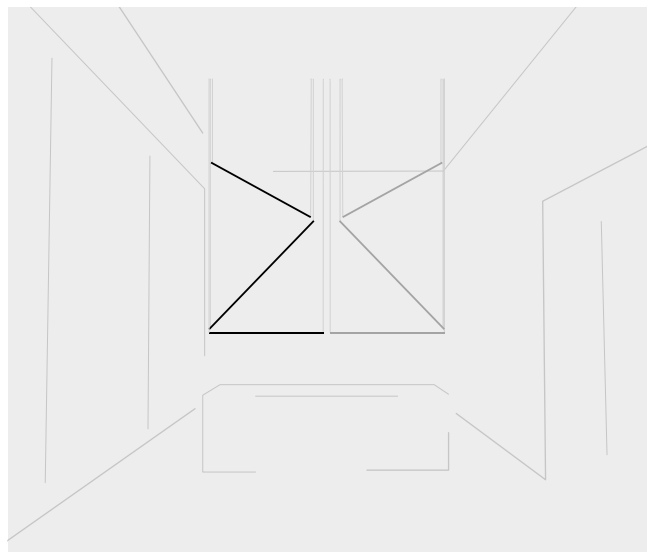

### STI005

Sketch composed by two identical compositions.


#### Each composition:

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.

LED 4000 K. 11870 lm. 88 W.

Remote driver Built-in Micro. 1-10V.

---

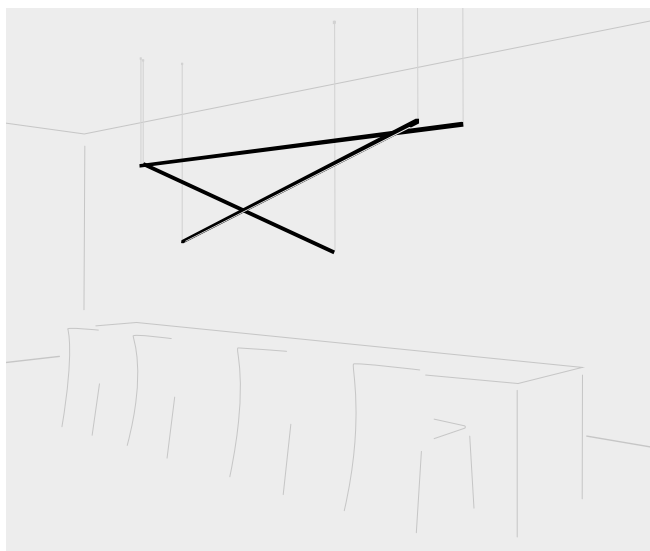

### STI015

Sketch composed by two compositions.

#### Composition 1:

2 Sticks: 1 x 150 cm, 1 x 300 cm. Total 4,5 m.

LED 2700 K. 9779 lm. 79,2 W.

Built-in disc S canopy. 1-10V.

#### Composition 2:

1 Stick: 1 x 300 cm. Total 3 m.

LED 2700 K. 6519 lm. 52,8 W.

Built-in disc S canopy. 1-10V.

---



### STI021

Sketch composed by four identical compositions.


#### Each composition:

2 Sticks: 2 x 200 cm. Total 4 m.

LED 4000 K. 9496 lm. 140,8 W.

Built-in disc S canopy. 1-10V.

---

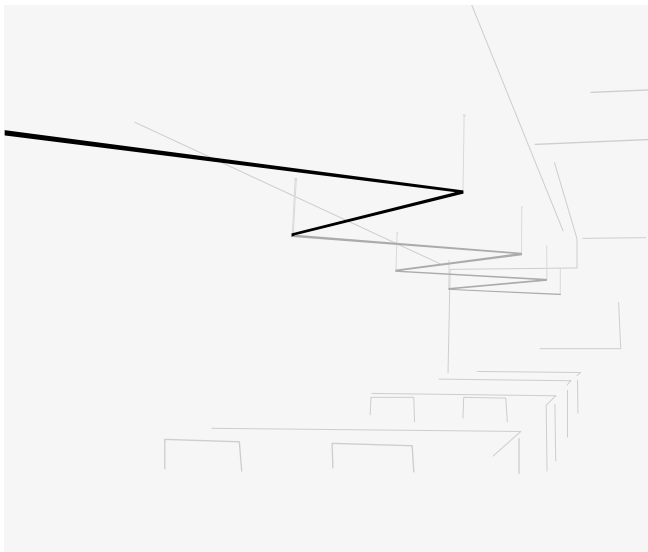


#### STIO25

Sketch composed by four identical compositions.

##### Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.  
LED 4000 K. 14244 lm. 105,6 W.  
Built-in disc S canopy. 1-10V.

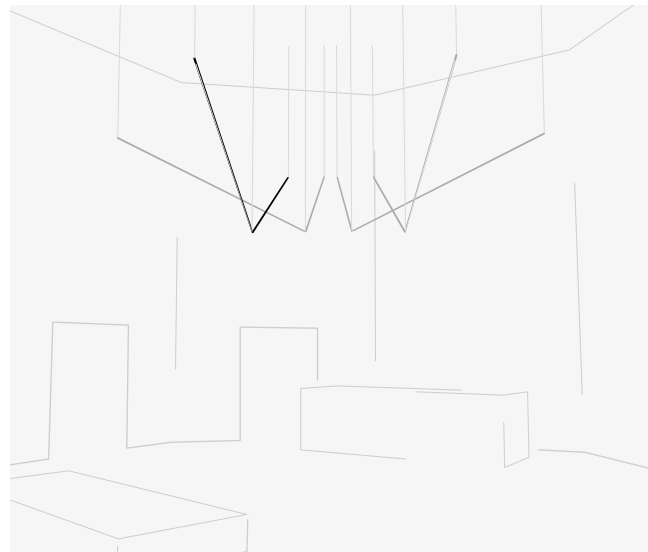


#### STIO35

Sketch composed by four identical compositions.

##### Each composition:

2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.  
LED 4000 K. 10683 lm. 79,2 W.  
Built-in disc S canopy. 1-10V.

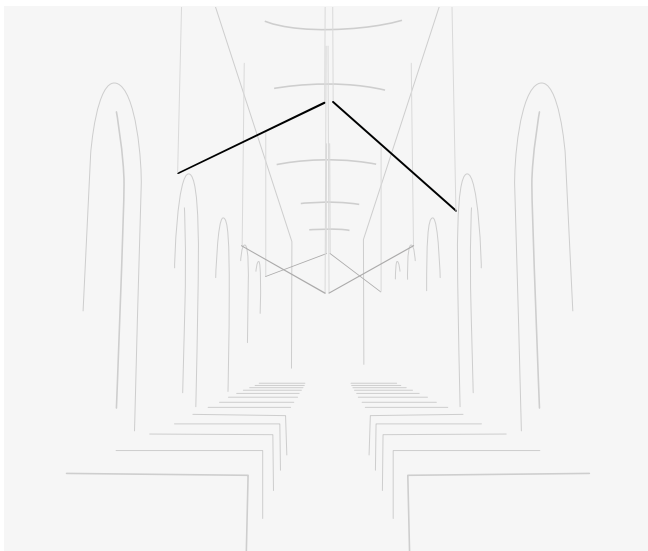


#### STIO41

Sketch composed by three identical compositions.

##### Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.  
LED 4000 K. 14244 lm. 105,6 W.  
Built-in disc S canopy. 1-10V.

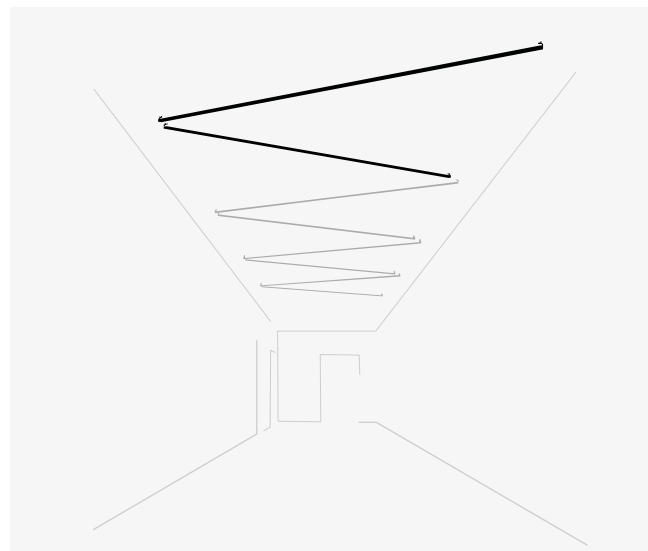

#### STIO85

Sketch composed by four identical compositions.

##### Each composition:


2 Sticks: 2 x 300 cm. Total 6 m.  
LED 4000 K. 14244 lm. 105,6 W.  
Remote driver Built-in Micro. 1-10V.

# Sticks Connectable

Next sketches are composed by one or more compositions

**Some sticks are attached to the Wall**

---

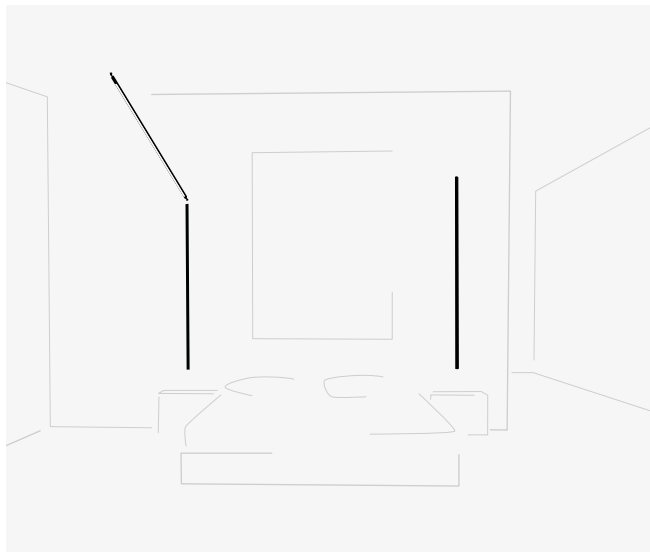


**STI051**  
Sketch composed by two compositions.

**Composition 1:**  
2 Sticks: 2 x 150 cm. Total 3 m.  
LED 2700 K. 6520 lm. 52,8 W.  
Floor base & plug. Push.

**Composition 2:**  
1 Stick: 1 x 200 cm. Total 2 m.  
LED 2700 K. 4346 lm. 35,2 W.  
Floor base & plug. Push.


---

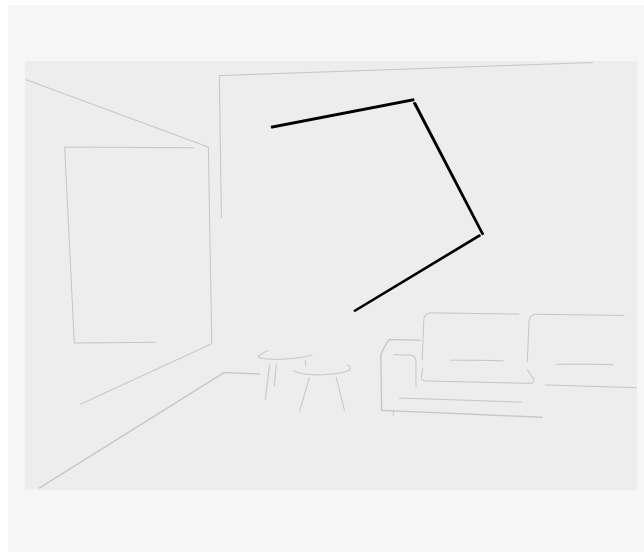

**STI055**  
Sketch composed by only one composition.

3 Sticks: 3 x 150 cm. Total 4,5 m.  
LED 2700 K. 9780 lm. 79,2 W.  
Floor base & plug. Push.


---

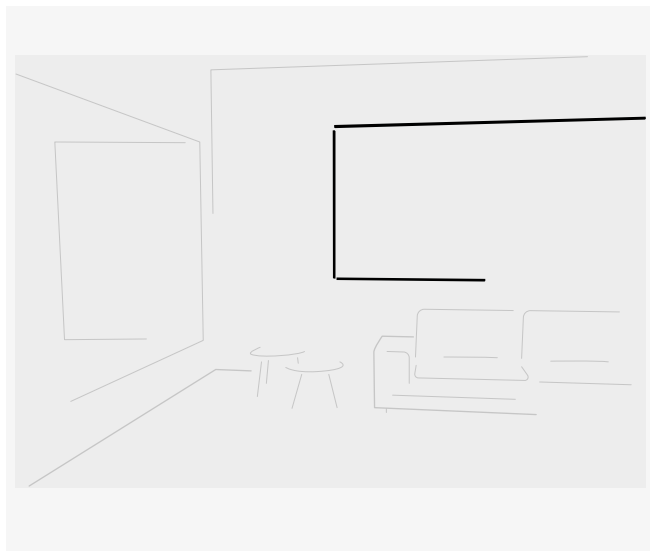

**STI061**  
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.  
LED 2700 K. 13039 lm. 105,6 W.  
Floor base & plug. Push.


---

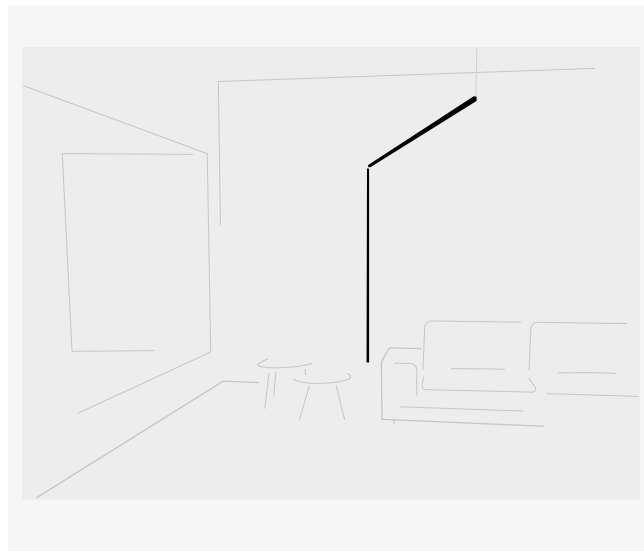

**STI065**  
Sketch composed by only one composition.

2 Sticks: 2 x 150 cm. Total 3 m.  
LED 2700 K. 6520 lm. 52,8 W.  
Floor base & plug. Push.

---

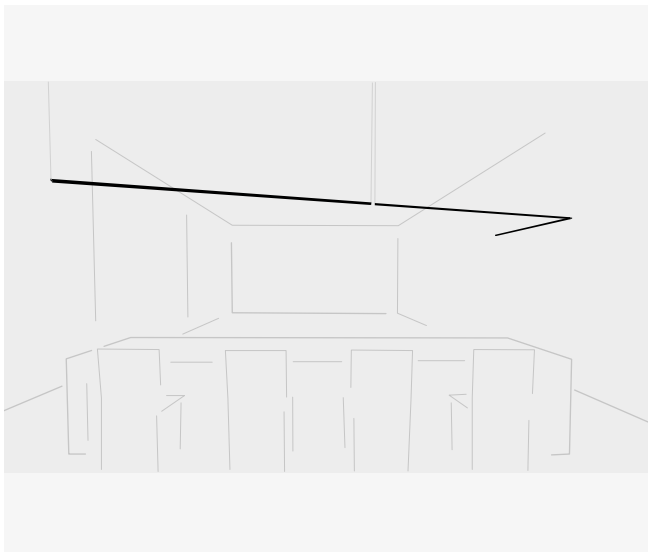


#### ST1071

Sketch composed by only one composition.

3 Sticks: 1 x 150 cm, 2 x 200 cm. Total 5,5 m.

LED 2700 K. 11952 lm. 96,8 W.

Floor base & plug. Push.

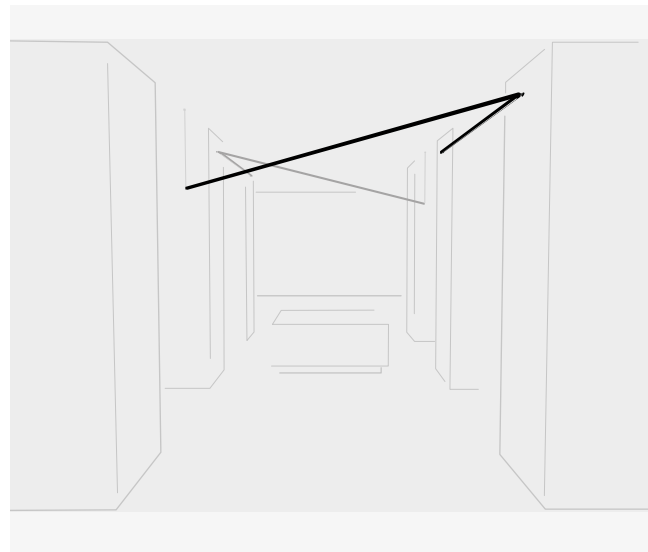

#### ST1075


Sketch composed by two identical compositions.

Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

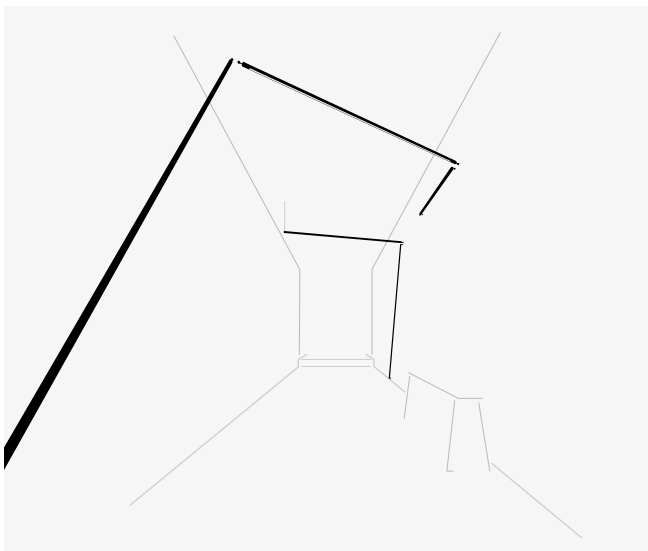

#### ST1081

Sketch composed by two compositions.

Composition 1:

3 Sticks: 1 x 150 cm, 1 x 200 cm, 1 x 300 cm. Total 6,5 m.

LED 4000 K. 15431 lm. 114,4 W.


Remote driver Built-in Micro. 1-10V.

Composition 2:

2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.

LED 4000 K. 11870 lm. 88 W.

Remote driver Built-in Micro. 1-10V.

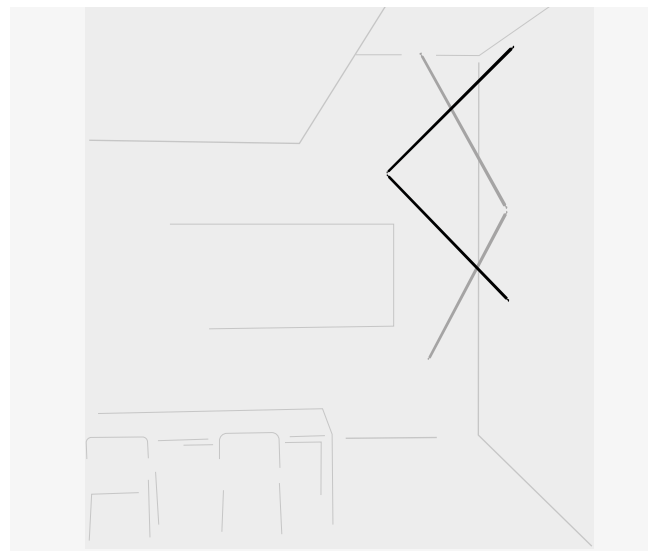

#### ST1091

Sketch composed by two identical compositions.

Each composition:

2 Sticks: 2 x 200 cm. Total 4 m.

LED 2700 K. 8692 lm. 70,4 W.

Remote driver Built-in Micro. 1-10V.

# Sticks Connectable

Next sketches are composed by one or more compositions

**Some sticks are attached to the Wall**

---



## STI095

Sketch composed by two identical compositions.


Each composition:

2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.

LED 4000 K. 11870 lm. 88 W.

Remote driver Built-in Micro. 1-10V.

---

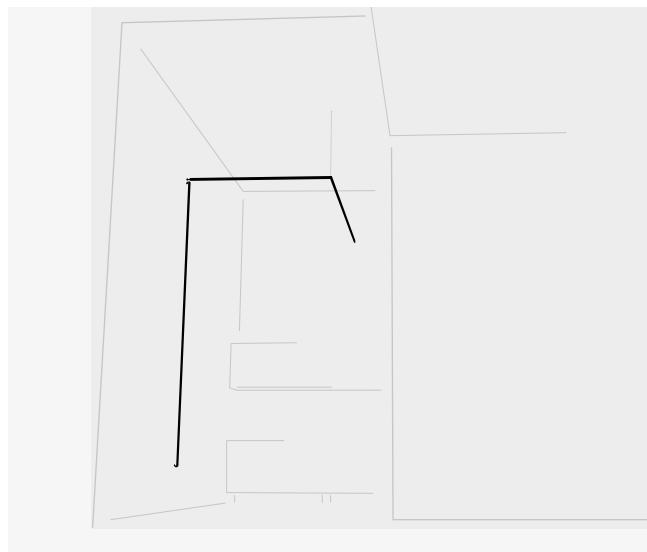

## STI101

Sketch composed by two compositions.

Composition 1:

2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.

LED 2700 K. 9779 lm. 79,2 W.

Remote driver Built-in Micro. 1-10V.


Composition 2:

1 Stick: 1 x 300 cm. Total 3 m.

LED 2700 K. 6519 lm. 52,8 W.

Remote driver Built-in Micro. 1-10V.

---

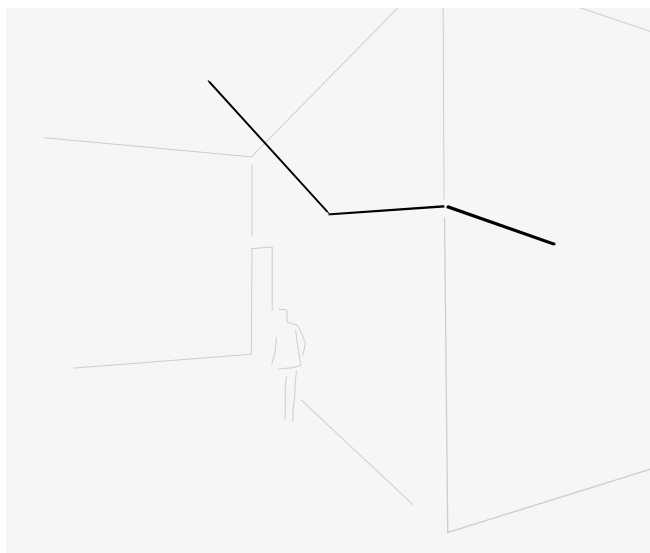

## STI105


Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.

LED 4000 K. 11870 lm. 88 W.

Floor base & plug. Push.

---

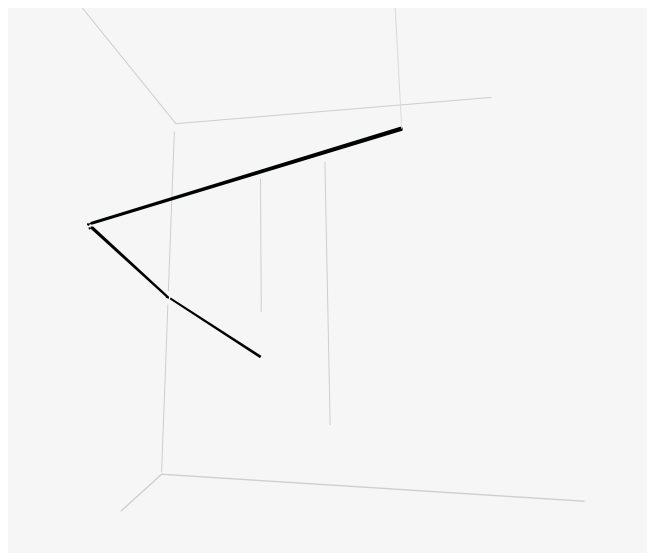

## STI111


Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

---

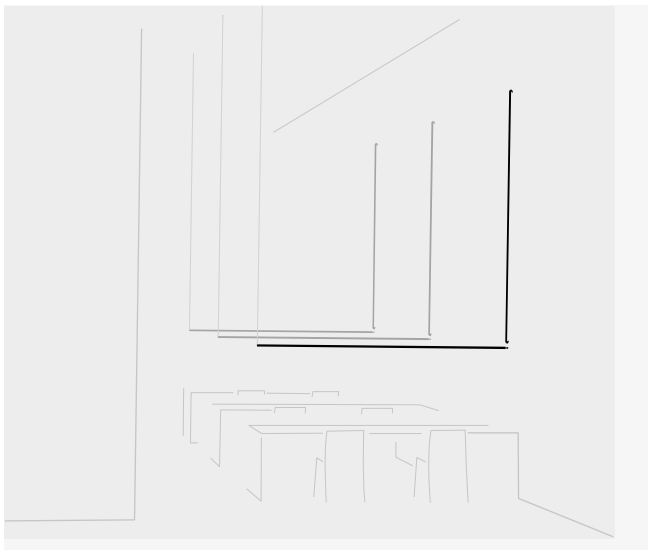

#### STI115


Sketch composed by three identical compositions.

##### Each composition:

2 Sticks: 2 x 200 cm. Total 4 m.

LED 4000 K. 9496 lm. 70,4 W.

Built-in disc S canopy. 1-10V.

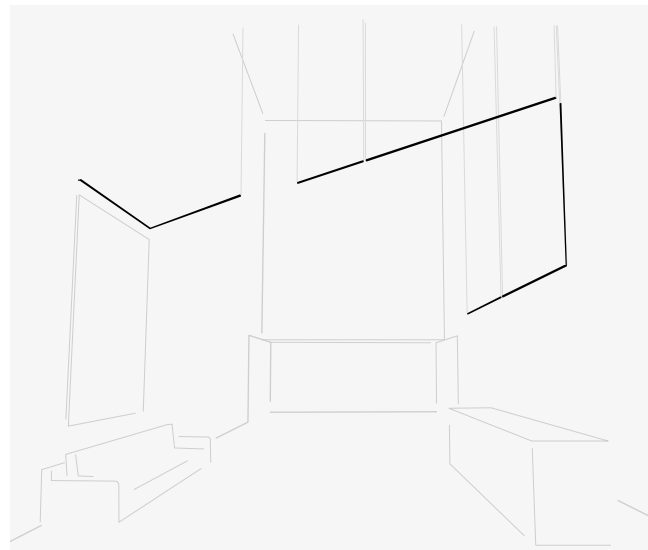

#### STI131

Sketch composed by four compositions.

##### Composition 1:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

##### Composition 3:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

##### Composition 2:

1 Stick: 1 x 150 cm. Total 1,5 m.

LED 4000 K. 3561 lm. 26,4 W.


Remote driver Built-in Micro. 1-10V.

##### Composition 4:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V.

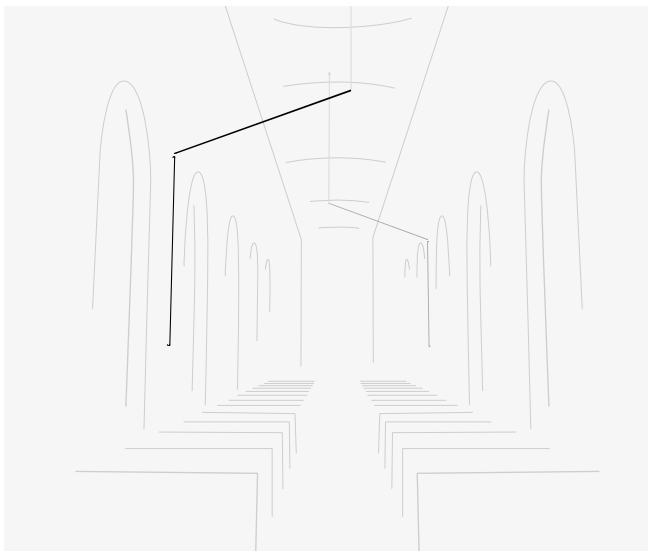

#### STI141

Sketch composed by two identical compositions.

##### Each composition:

2 Sticks: 2 x 300 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.


Built-in disc S canopy. 1-10V.

# Sticks Connectable

Next sketches are composed by one or more compositions

## Some sticks are attached to the Wall

---

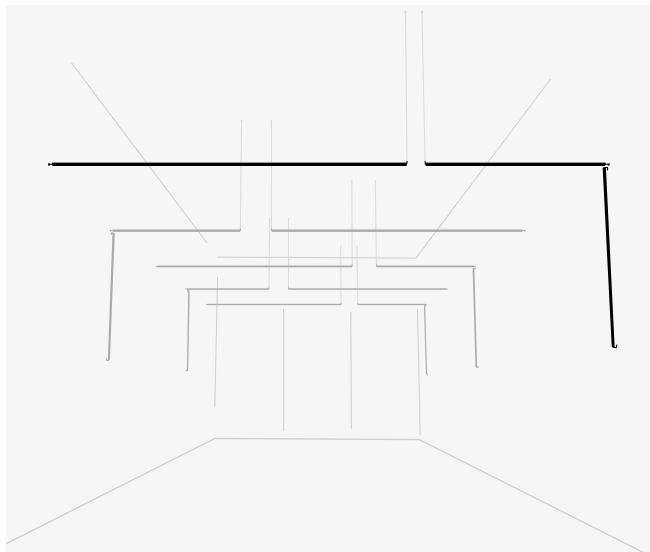

### ST1145

Sketch composed by five identical compositions.

#### Each composition:


3 Sticks: 1 x 300 cm, 2 x 150 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.

Remote driver Built-in Micro. 1-10V

## Some sticks are on the Floor

---

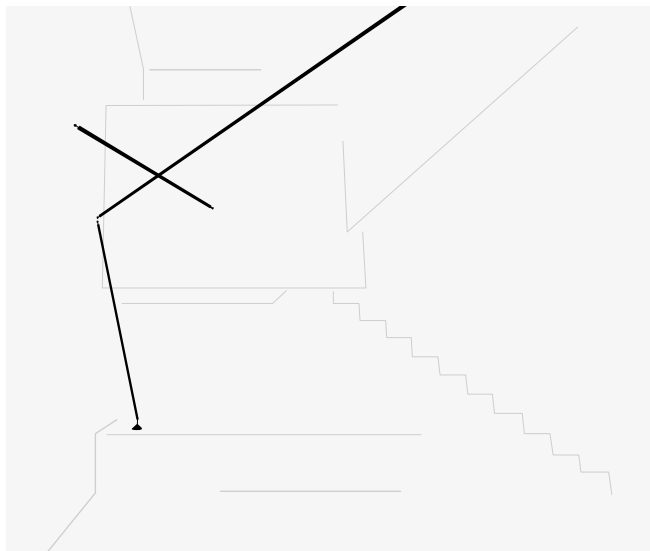

### ST1151

Sketch composed by two compositions.

#### Composition 1:

1 Stick: 1 x 150 cm. Total 1,5 m.

LED 2700 K. 3260 lm. 26,4 W.


Remote driver Built-in Micro. 1-10V.

#### Composition 2:

2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.

LED 2700 K. 10865 lm. 88 W.

Remote driver Built-in Micro. 1-10V.

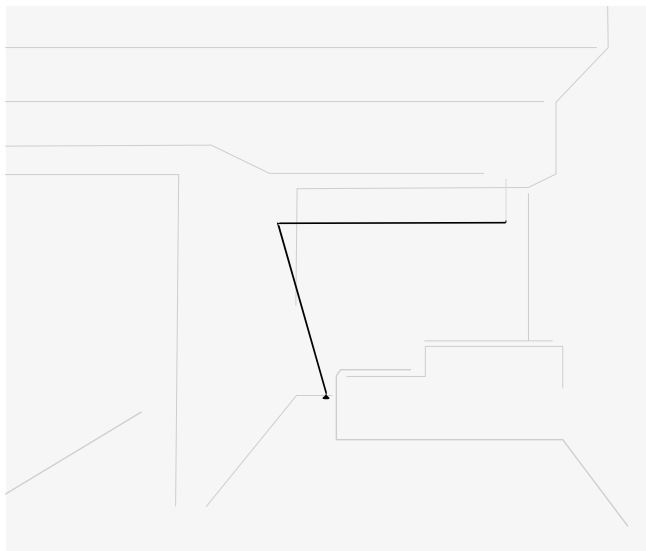

### ST1155


Sketch composed by only one composition.

2 Sticks: 2 x 300 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.

Floor base & plug. Push.



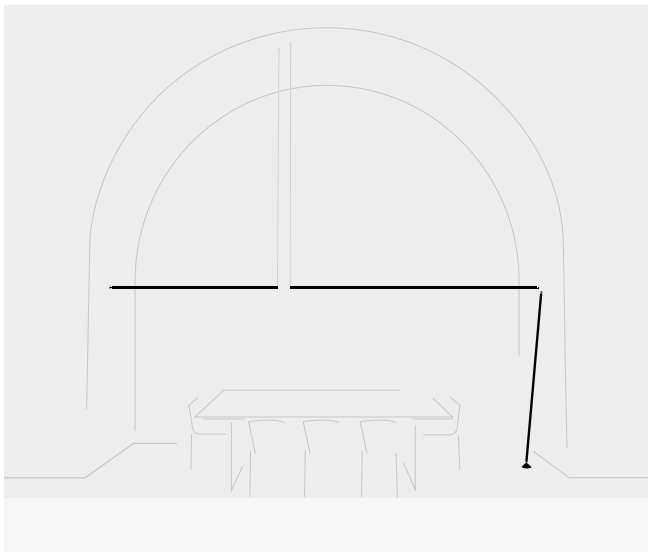

#### STI161

Sketch composed by two compositions.

##### Composition 1:

1 Stick: 1 x 200 cm. Total 2 m.

LED 2700 K. 4336 lm. 35,2 W.


Remote driver Built-in Micro. 1-10V. Remote driver Built-in Micro. 1-10V.

##### Composition 2:

2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.

LED 2700 K. 10865 lm. 88 W.

Remote driver Built-in Micro. 1-10V. Remote driver Built-in Micro. 1-10V.

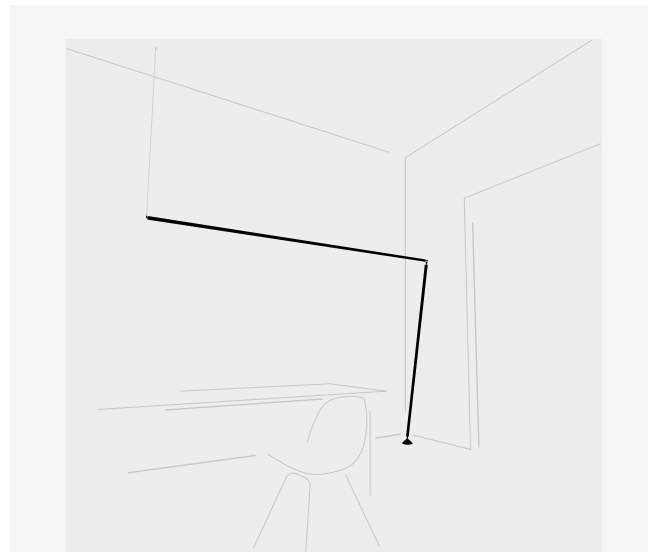

#### STI165

Sketch composed by only one composition.

2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.

LED 2700 K. 10865 lm. 88 W.

Floor base & plug. Push.



#### STI171

Sketch composed by two compositions.

##### Composition 1:

3 Sticks: 3 x 200 cm. Total 6 m.

LED 4000 K. 14244 lm. 105,6 W.


Surface canopy. 1-10V.

##### Composition 2:

2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.

LED 4000 K. 11870 lm. 88 W.

Surface canopy. 1-10V.

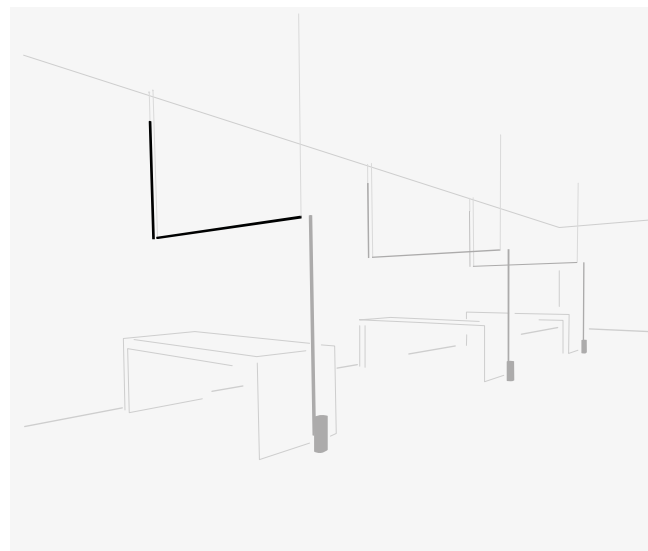

#### STI175

Sketch composed by three identical compositions.

##### Each composition:

2 Sticks: 1 x 150 cm, 1 x 200 cm. Total 3,5 m.

LED 4000 K. 8309 lm. 61,6 W.

Surface canopy. 1-10V.



Each project is unique.  
Visit [vibia.com](http://vibia.com) and chose among  
multiple compositions designed  
and adapted to your project needs.

Personalize your own Sticks composition  
quick and easy at [vibia.com](http://vibia.com).

# Sticks Connectable

## Elements to be configured

Wall-Wall / Ceiling-Ceiling  
Wall-Wall (corner) / Wall-Ceiling  
Wall-Pendants  
Pendants-Pendants  
Pendants-Ceiling  
Pendants

### Sticks 1,5 m.

7300 7310 7320 7330 7350

LED temperature colour

- /1 \_ 2700 K  CRI >90 3260 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 3510 lm 133 lm/W  
/4 \_ 4000 K  CRI >90 3561 lm 134 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 0,9 Kg.

### Sticks 2 m.

7303 7313 7323 7333 7353

LED temperature colour

- /1 \_ 2700 K  CRI >90 4346 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 4680 lm 133 lm/W  
/4 \_ 4000 K  CRI >90 4748 lm 134 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,2 Kg.

### Sticks 3 m.

7306 7316 7326 7336 7356

LED temperature colour

- /1 \_ 2700 K  CRI >90 6519 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 7020 lm 133 lm/W  
/4 \_ 4000 K  CRI >90 7122 lm 134 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 1,8 Kg.

Sticks: Aluminum.

Diffuser: Polycarbonate.

**Driver and Dimming** depends on selected installation accessory (see page 377).

Suspension cables up to 3m. for Wall - Pendants and Pendants-Pendants.

#### Personalisation options available

- Extra cable length for Wall - Pendants and Pendants - Pendants.

Min. quantity, upcharge and extra lead time apply.

### 11 Black

(NCS S 8500-N)

LED  IP20   Dimmer



Horizontal Pendants version with a UGR index <19 available. Request more information.

## Floor-Wall

### Sticks 1,5 m.

7340

LED temperature colour

- /1 \_ 2700 K  CRI >90 3260 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 2644 lm 100,15 lm/W  
/4 \_ 4000 K  CRI >90 3561 lm 134 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 1,5 Kg.

### Sticks 2 m.

7343

LED temperature colour

- /1 \_ 2700 K  CRI >90 4346 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 2644 lm 100,15 lm/W  
/4 \_ 4000 K  CRI >90 4748 lm 134 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,8 Kg.

### Sticks 3 m.

7306 7316 7326 7336 7356

LED temperature colour

- /1 \_ 2700 K  CRI >90 6519 lm 123 lm/W  
/2 \_ 3000 K  CRI >90 5288 lm 100,15 lm/W  
/4 \_ 4000 K  CRI >90 7122 lm 134 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 2,4 Kg.

Sticks: Aluminum.

Diffuser: Polycarbonate.

**Driver and Dimming** depends on selected installation accessory (see page 377).

### 11 Black


(NCS S 8500-N)

LED  IP20   Dimmer

# Electrical connection options



Floor base & plug




Surface canopy



Built-in disc S



Remote driver Built-in Micro




**Floor base & plug**  
ACST000001 ACST000002  
**Driver** Constant Voltage 24V.  
200~240V. 50/60Hz.  
**Dimming:** Push.

**Materials**  
Body: Steel.

**Packaging**  
1 Box.  
0,16 x 0,16 x 0,4 m.  
Vol. 0,01 m³.  
Gross weight 8,5 Kg.  
Net weight 7 Kg.

**11 Black**  
(NCS S 8500-N)




**Surface canopy**  
ACST000003 ACST000004  
**Driver** Constant Voltage 24V.  
90~305V. 50/60Hz.  
**Dimming:** 1-10V.

**Personalisation options available**  
- Dimming: DALI, Casambi.  
Min. quantity, upcharge and extra lead time apply.  
To be installed on ceiling or wall.

**Materials**  
Body: Steel.

**Packaging**  
1 Box.  
0,50 x 0,25 x 0,25 m.  
Vol. 0,03 m³.  
Gross weight 2,9 Kg.  
Net weight 2,5 Kg.

**11 Black**  
(NCS S 8500-N)




**Built-in disc S**  
ACST000005 ACST000006  
**Driver** Constant Voltage 24V.  
90~305V. 50/60Hz.  
**Dimming:** 1-10V.

**Personalisation options available**  
- Dimming: DALI, Casambi.  
Min. quantity, upcharge and extra lead time apply.  
To be installed on ceiling or wall.

**Materials**  
Body: Steel.

**Packaging**  
1 Box.  
0,25 x 0,25 x 0,25 m.  
Vol. 0,01 m³.  
Gross weight 1,8 Kg.  
Net weight 1,5 Kg.

**11 Black**  
(NCS S 8500-N)



**Remote driver Built-in Micro**  
ACST000007 ACST000008  
**Driver** Constant Voltage 24V.  
90~305V. 50/60Hz.  
**Dimming:** 1-10V.

**Personalisation options available**  
- Dimming: DALI, Casambi.  
Min. quantity, upcharge and extra lead time apply.  
To be installed on ceiling or wall.

**Materials**  
Body: Aluminum.

**Packaging**  
1 Box.  
0,25 x 0,25 x 0,25 m.  
Vol. 0,01 m³.  
Gross weight 1,8 Kg.  
Net weight 1,5 Kg.

**11 Black**  
(NCS S 8500-N)







# Sticks Stand-alone


Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

## Floor

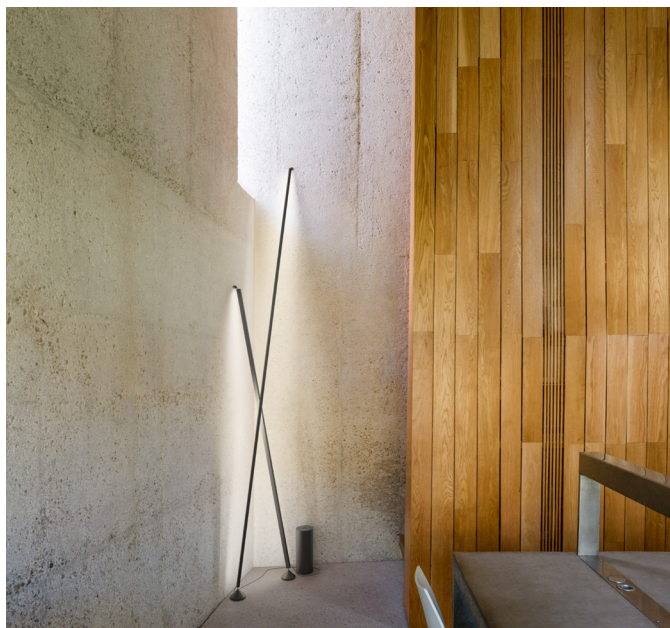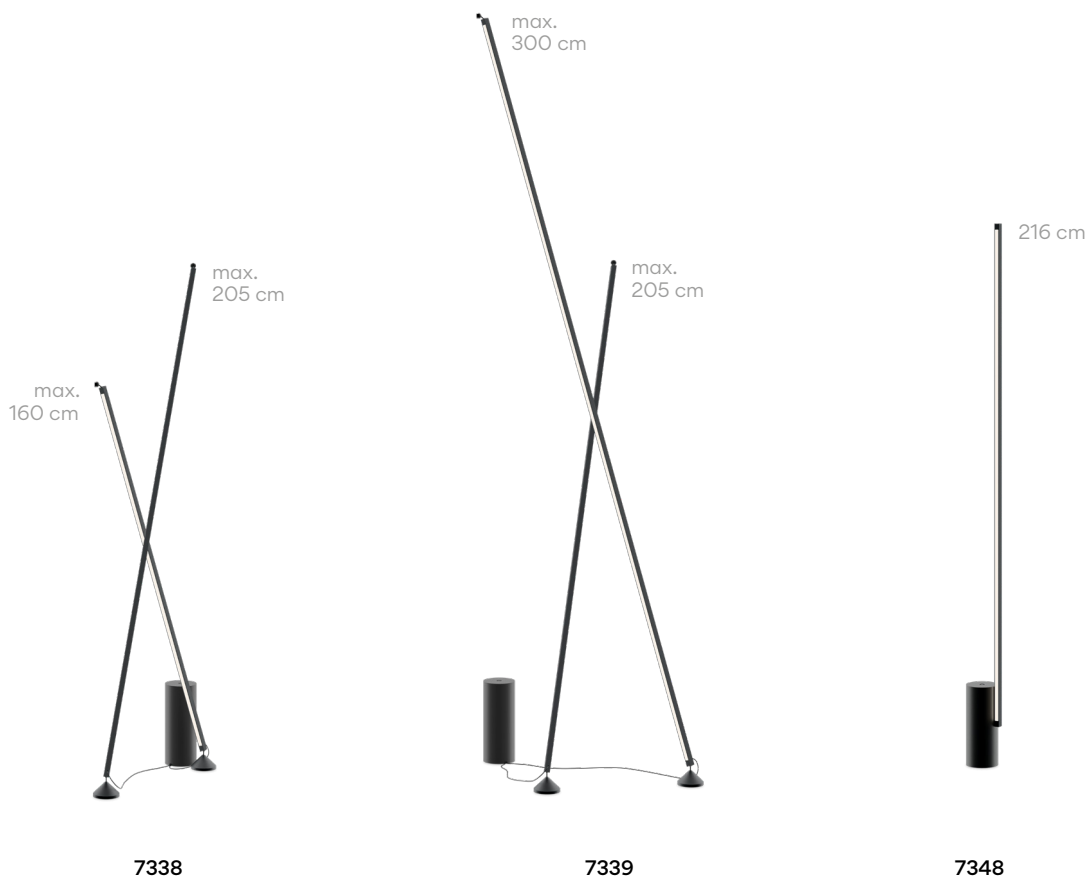

## 7338

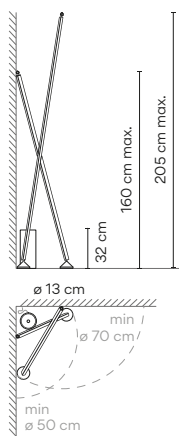

**Finishes**  
● 11/ \_ \_ Black  
(NCS S 8500-N)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 7606 lm 123 lm/W  
/2 \_ 3000 K   
CRI >90 7606 lm 123 lm/W  
/4 \_ 4000 K   
CRI >90 8309 lm 134 lm/W

**Control**  
7338 \_ \_ / \_ 5  
Push


**Materials**  
Sticks: Aluminum.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
1 x LED STRIP 26,4 W 24V  
1 x LED STRIP 35,2 W 24V  
Constant Voltage 24V  
200~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,0414 m³  
Gross weight 14,2 Kg Net weight 9,7 Kg

LED ☐ IP20 ☐ CE ☐ Dimmer ☐

## 7339

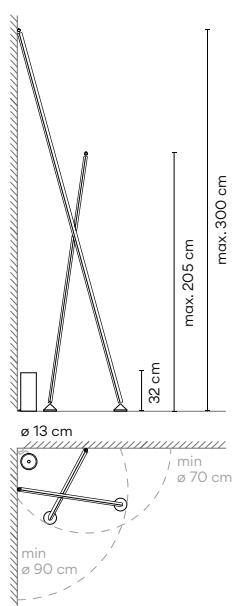

**Finishes**  
● 11/ \_ \_ Black  
(NCS S 8500-N)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 10865 lm 123 lm/W  
/2 \_ 3000 K   
CRI >90 7606 lm 123 lm/W  
/4 \_ 4000 K   
CRI >90 11870 lm 134 lm/W

**Control**  
7339 \_ \_ / \_ 5  
Push

**Materials**  
Sticks: Aluminum.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
1 x LED STRIP 35,2 W 24V  
1 x LED STRIP 52,8 W 24V  
Constant Voltage 24V  
200~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,057 m³  
Gross weight 16,6 Kg Net weight 10,6 Kg

LED ☐ IP20 ☐ CE ☐ Dimmer ☐

## 7348



**Finishes**  
● 11/ \_ \_ Black  
(NCS S 8500-N)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 4346 lm 123 lm/W  
/2 \_ 3000 K   
CRI >90 3511 lm 133 lm/W  
/4 \_ 4000 K   
CRI >90 4748 lm 134 lm/W

**Control**  
7348 \_ \_ / \_ 5  
Push

**Materials**  
Sticks: Aluminum.  
Diffuser: Polycarbonate.

**Light Source and electronics**  
1 x LED STRIP 35,2 W 24V  
Constant Voltage 24V  
200~240V 50/60Hz

**Packaging**  
2 Boxes  
Total Vol 0,0166 m³  
Gross weight 8,8 Kg Net weight 8,4 Kg

LED ☐ IP20 ☐ CE ☐ Dimmer ☐



# Musa

Design by Note Design Studio

Delicate elegance.  
It explores the delicacy of nature  
which is both strong and powerful,  
in a poetic expression of light.

## Table Wall



ø 26 cm

7400



ø 26 cm


7402 7404



ø 26 cm

7415

### 7400



#### Finishes

- **36/** \_\_ Soft Pink (NCS S 1010-Y50R)
- **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
- **93/** \_\_ White (RAL 9016)

Finish customization  
(Available options:  
Vibia colour palette)

#### Materials

Diffuser: Blown glass.  
Body: Aluminum.

#### Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Voltage 24V  
100~240V 50/60Hz

#### LED temperature colour

/1\_ 2700 K   
CRI >90 449 lm 100 lm/W

#### Control

**7400** \_\_ / \_\_ 5  
Push

#### Packaging


1 Box 0,17 x 0,32 x 0,3 m  
Vol 0,0163 m³  
Gross weight 1,3 Kg Net weight 0,85 Kg

#### Notes

Dimmer switch on the base.  
Electric cable with plug. 3 m

### 7402



#### Finishes

- **36/** \_\_ Soft Pink (NCS S 1010-Y50R)
- **24/** \_\_ Beige M1 (NCS S 2005-Y50R)
- **93/** \_\_ White (RAL 9016)

Finish customization  
(Available options:  
Vibia colour palette)

#### Materials

Diffuser: Blown glass.  
Body: Aluminum.

#### Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Voltage 24V  
100~240V 50/60Hz

#### LED temperature colour

/1\_ 2700 K   
CRI >90 449 lm 100 lm/W

#### Control

**7402** \_\_ / \_\_ 5  
Push

#### Packaging

1 Box 0,17 x 0,32 x 0,3 m  
Vol 0,0163 m³  
Gross weight 1,3 Kg Net weight 0,85 Kg

#### Notes


Dimmer switch on the base.  
Electric cable with plug. 3 m

## 7404

|                                                                                                                                                                     |                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Finishes</b>                                                                                                                                                     | <b>LED temperature colour</b>                                                                                            |
| <ul style="list-style-type: none"> <li>36/ _ _ Soft Pink (NCS S 1010-Y50R)</li> <li>24/ _ _ Beige M1 (NCS S 2005-Y50R)</li> <li>93/ _ _ White (RAL 9016)</li> </ul> | /1 _ 2700 K <br>CRI >90 157 lm 105 lm/W |
| <b>Finish customization</b><br>(Available options:<br>Vibia colour palette)                                                                                         |                                                                                                                          |

**Control**  
**7404** \_ \_ / \_ 5  
 Push



### Materials

Diffuser: Blown glass.  
 Body: Aluminum.

### Light Source and electronics

1 x LED 1,5 W 500 mA  
 Constant Voltage 5V  
 100~240V 50/60Hz

### Packaging

1 Box 0,17 x 0,32 x 0,3 m  
 Vol 0,0163 m³  
 Gross weight 1,4 Kg Net weight 0,95 Kg

### Notes


Portable version with battery.  
 Dimmer switch on the base. 3 step dimming.  
 Electric cable with plug. 3 m.  
 Battery life: from 6 to 18 hours  
 (depending on intensity).



## 7415

|                                                                                                                                                                     |                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Finishes</b>                                                                                                                                                     | <b>LED temperature colour</b>                                                                                              |
| <ul style="list-style-type: none"> <li>36/ _ _ Soft Pink (NCS S 1010-Y50R)</li> <li>24/ _ _ Beige M1 (NCS S 2005-Y50R)</li> <li>93/ _ _ White (RAL 9016)</li> </ul> | /1 _ 2700 K <br>CRI >90 449 lm 100 lm/W |
| <b>Finish customization</b><br>(Available options:<br>Vibia colour palette)                                                                                         |                                                                                                                            |

**Control**  
**7415** \_ \_ / \_ 3  
 1-10V



### Materials


Diffuser: Blown glass.  
 Body: Aluminum.

### Light Source and electronics

1 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 220~240V 50/60Hz

### Packaging

1 Box 0,17 x 0,32 x 0,3 m  
 Vol 0,0163 m³  
 Gross weight 1,8 Kg Net weight 1,3 Kg



# Knit


Design by Meike Harde

Form, materiality and tangibility collide with the Knit collection. Its texture is magnetic, calling out for us to touch its surface, to feel its warmth and to keep it close. Light seeps outwards through the fabric and downwards through a translucent screen, softening its luminosity.

## Pendants



### 7450



| Finishes                                     | LED temperature colour                 |
|----------------------------------------------|----------------------------------------|
| ● <b>24/ _ Beige M1</b><br>(NCS S 2005-Y50R) | /1_ 2700 K<br>CRI >90 4752 lm 198 lm/W |

Control  
**7450 \_ / \_ 1**  
DALI

**7450 \_ / \_ 3**  
1-10V

**7450 \_ / \_ Z**  
Casambi

**Materials**  
Fabric Shade: Flame-retardant polyester.  
Interior diffuser: Polyethylene. Bottom diffuser: Methacrylate.  
Diffuser ring and support: ABS.

**Light Source and electronics**  
6 x LED 5,9W 350 mA  
Constant Current 1050 mA  
110~240V 50/60Hz

**Packaging**  
1 Box 0,55 x 0,55 x 0,65 m  
Vol 0,196 m³  
Gross weight 6 Kg Net weight 3,7 Kg

**Notes**  
Extra cable length. **16,00 €/m**


**Electrical connection**  
Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings

1160 10 / 1A \_18

Model Finish LED temperature colour Control Electrical connection Only for pendants



7455



Finishes  
24/ \_ Beige M1  
(NCS S 2005-Y50R)

LED temperature colour  
/1\_ 2700 K   
CRI >90 4752 lm 198 lm/W

Control  
7455 \_ \_ / \_ 1  
DALI

7455 \_ \_ / \_ 3  
1-10V

7455 \_ \_ / \_ Z  
Casambi

#### Materials

Fabric Shade: Flame-retardant polyester.  
Interior diffuser: Polyethylene. Bottom diffuser: Methacrylate.  
Diffuser ring and support: ABS.

#### Light Source and electronics

6 x LED 5,9W 350 mA  
Constant Current 1050 mA  
110-240V 50/60Hz

#### Packaging

1 Box 0,54 x 0,54 x 0,41 m  
Vol 0,119 m<sup>3</sup>  
Gross weight 5,9 Kg Net weight 3,4 Kg

#### Notes

Extra cable length. 16,00 €/m


LED  IP20  EAC  Bi-volt

#### Electrical connection

Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings

|       |        |                        |                       |
|-------|--------|------------------------|-----------------------|
| 1160  | 10     | /1A                    | 18                    |
| Model | Finish | LED temperature colour | Control               |
|       |        |                        | Electrical connection |
|       |        |                        | Only for pendants     |

7460



Finishes  
● 24/ \_ Beige M1  
(NCS S 2005-Y50R)

LED temperature colour  
/1\_ 2700 K    
CRI >90 4752 lm 198 lm/W

Control  
7460 \_ \_ / \_ 1  
DALI

7460 \_ \_ / \_ 3  
1-10V

7460 \_ \_ / \_ Z  
Casambi

Materials  
Fabric Shade: Flame-retardant polyester.  
Interior diffuser: Polyethylene. Bottom diffuser: Methacrylate.  
Diffuser ring and support: ABS.

Light Source and electronics  
6 x LED 5,9W 350 mA  
Constant Current 1050 mA  
110-240V 50/60Hz


Packaging  
1 Box 0,54 x 0,54 x 0,41 m  
Vol 0,119 m³  
Gross weight 5,2 Kg Net weight 3,2 Kg

Notes  
Extra cable length. 16,00 €/m

Electrical connection  
Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings

7470



Finishes  
● 24/ \_ Beige M1  
(NCS S 2005-Y50R)

LED temperature colour  
/1\_ 2700 K    
CRI >90 4752 lm 198 lm/W

Control  
7470 \_ \_ / \_ 1  
DALI

7470 \_ \_ / \_ 3  
1-10V

7470 \_ \_ / \_ Z  
Casambi

Materials  
Fabric Shade: Flame-retardant polyester.  
Interior diffuser: Polyethylene. Bottom diffuser: Methacrylate.  
Diffuser ring and support: ABS.

Light Source and electronics  
6 x LED 6,7W 400 mA  
Constant Current 1200 mA  
110-240V 50/60Hz


Packaging  
1 Box 0,77 x 0,77 x 0,50 m  
Vol 0,296 m³  
Gross weight 9,4 Kg Net weight 4,9 Kg

Notes  
Extra cable length. 16,00 €/m

Electrical connection  
Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings

7475



Finishes  
● 24/ \_ Beige M1  
(NCS S 2005-Y50R)

LED temperature colour  
/1\_ 2700 K    
CRI >90 4752 lm 198 lm/W

Control  
7475 \_ \_ / \_ 1  
DALI

7475 \_ \_ / \_ 3  
1-10V

7475 \_ \_ / \_ Z  
Casambi

Materials  
Fabric Shade: Flame-retardant polyester.  
Interior diffuser: Polyethylene. Bottom diffuser: Methacrylate.  
Diffuser ring and support: ABS.

Light Source and electronics  
6 x LED 6,7W 400 mA  
Constant Current 1200 mA  
110-240V 50/60Hz

Packaging  
1 Box 0,78 x 0,78 x 0,59 m  
Vol 0,358 m³  
Gross weight 9 Kg Net weight 5,6 Kg

Notes  
Extra cable length. 16,00 €/m

Electrical connection  
Surface  
\_18 Free Wire  
\_23 Built-in  
\_31 Remote  
Micro  
for plaster  
ceilings  
\_32 Remote  
XXS  
for all types  
of drop  
ceilings







# Electrical connection options for models 7450 / 7455 / 7460 / 7470 / 7475


Choose your preferred installation option according to your needs.  
For each composition, the optimal minimum number of drivers will be delivered.

## Drop ceiling


The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 7450 / 7455 / 7460 / 7470 / 7475

### Remote




**Micro** ø 3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.



### Built-in



ø 8 cm  
height 6 cm  
match with  
fixture finish.





---

## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 7450 / 7455 / 7460 / 7470 / 7475


### Surface



ø 16 cm  
match with  
fixture finish.





### Free Wire



1 wire


ø 22 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.



2 - 3 wires

ø 36 cm



4 wires


ø 40 cm



Floor



## 7480



**Finishes**  
24/ \_ \_ Beige M1  
(NCS S 2005-Y50R)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 4752 lm 198 lm/W

**Control**  
7480 \_ \_ / \_ 5  
Push

7480 \_ \_ / \_ Z  
Casambi

### Materials

Fabric Shade: Flame-retardant polyester.  
Interior diffuser: Polyethylene. Bottom diffuser: Methacrylate.  
Diffuser ring and support: ABS. Floor stemp: Iron steel.  
Floor base: Zamak.

### Light Source and electronics

6 x LED 5,9W 350 mA  
Constant Voltage 42V 1,43mA  
110-240V 50/60Hz

### Packaging


2 Boxes  
Box 1: 0,54 x 0,54 x 0,41 m  
Box 2: 0,38 x 1,71x 0,36 m  
Total Vol. 0,3529 m<sup>3</sup>  
Gross weight 18,8 Kg Net weight 11,3 Kg

### Notes

Electric cable 2,5 m

## 7485



**Finishes**  
24/ \_ \_ Beige M1  
(NCS S 2005-Y50R)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 4752 lm 198 lm/W

**Control**  
7485 \_ \_ / \_ 5  
Push

7485 \_ \_ / \_ Z  
Casambi

### Materials

Fabric Shade: Flame-retardant polyester.  
Interior diffuser: Polyethylene. Bottom diffuser: Methacrylate.  
Diffuser ring and support: ABS. Floor stemp: Iron steel.  
Floor base: Zamak.

### Light Source and electronics

6 x LED 5,9W 350 mA  
Constant Voltage 42V 1,43mA  
110-240V 50/60Hz

### Packaging


2 Boxes  
Box 1: 0,54 x 0,54 x 0,41 m  
Box 2: 0,38 x 1,71x 0,36 m  
Total Vol. 0,3529 m<sup>3</sup>  
Gross weight 28,4 Kg Net weight 17,7 Kg

### Notes

Electric cable 2,5 m

## 7487



**Finishes**  
24/ \_ \_ Beige M1  
(NCS S 2005-Y50R)

**LED temperature colour**  
/1 \_ 2700 K   
CRI >90 4752 lm 198 lm/W

**Control**  
7487 \_ \_ / \_ 5  
Push

7487 \_ \_ / \_ Z  
Casambi

### Materials

Fabric Shade: Flame-retardant polyester.  
Interior diffuser: Polyethylene. Bottom diffuser: Methacrylate.  
Diffuser ring and support: ABS. Floor stemp: Iron steel.  
Floor base: Zamak.

### Light Source and electronics

6 x LED 5,9W 350 mA  
Constant Voltage 42V 1,43 mA  
110-240V 50/60Hz



### Packaging

2 Boxes  
Box 1: 0,78 x 0,78 x 0,59 m  
Box 2: 0,45 x 0,46 x 1,93 m  
Total Vol. 0,7579 m<sup>3</sup>  
Gross weight 30 Kg Net weight 18,5 Kg

### Notes

Electric cable 2,5 m

|      |                                                                                     |                                         |                                                                                                                            |                                                     |
|------|-------------------------------------------------------------------------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| 7490 |    | Finishes                                | LED temperature colour                                                                                                     | Control                                             |
|      |                                                                                     | ● 24/ _ _ Beige M1<br>(NCS S 2005-Y50R) | /1_ 2700 K <br>CRI >90 4752 lm 198 lm/W   | 7490 _ _ / _ 5<br>Push<br>7490 _ _ / _ Z<br>Casambi |
| 7492 |   | Finishes                                | LED temperature colour                                                                                                     | Control                                             |
|      |                                                                                     | ● 24/ _ _ Beige M1<br>(NCS S 2005-Y50R) | /1_ 2700 K <br>CRI >90 4752 lm 198 lm/W   | 7492 _ _ / _ 5<br>Push<br>7492 _ _ / _ Z<br>Casambi |
| 7494 |  | Finishes                                | LED temperature colour                                                                                                     | Control                                             |
|      |                                                                                     | ● 24/ _ _ Beige M1<br>(NCS S 2005-Y50R) | /1_ 2700 K <br>CRI >90 4752 lm 198 lm/W | 7494 _ _ / _ 5<br>Push<br>7494 _ _ / _ Z<br>Casambi |





# Set

Design by Xuclà

A game of light, shadows and volumes, Set is a new concept of modular wall sconces that composes light as art onto the walls. During the day Set decorates the wall with a pattern of rectangular elements, but once illuminated it creates a surprising feature of lights, shadows and volumes.




Wall






Each project is unique. Visit [vibia.com](http://vibia.com) and chose among multiple compositions designed and adapted to your project needs.


Personalise your own Set composition quick and easy at [vibia.com](http://vibia.com)

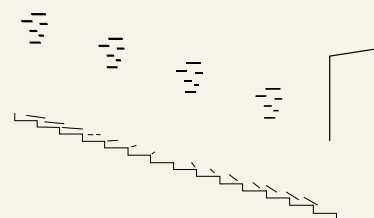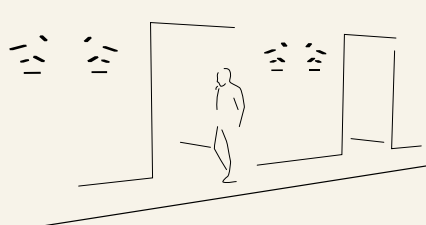

7753 x 3




7753 x 3



7750 x 1, 7751 x 3, 7752 x 1




7760 x 1, 7761 x 1, 7762 x 2,  
7763 x 1, 7764 x 1



|      |  |                                                                                                                                                                                                                                      |                                                                                                                                                                                |                                          |
|------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| 7749 |  | <b>Finishes</b><br>● 59/ __ Mink<br>(PANTONE 407)<br>● 93/ __ White<br>(RAL 9003)                                                                                                                                                    | <b>LED temperature colour</b><br>/1_ 2700 K<br>CRI >90 1269 lm 141 lm/W                                                                                                        | <b>Control</b><br>7749 __ / _ 2<br>0-10V |
|      |  | <b>Materials</b><br>Body: Aluminum. Diffuser: Borosilicate glass.<br>Lid: Polycarbonate.<br><br><b>Light Source and electronics</b><br>1 x LED 9 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz                             | <b>Packaging</b><br>1 Box 0,065 x 0,145 x 0,275 m<br>Vol 0,0026 m³<br>Gross weight 0,67 Kg Net weight 0,52 Kg<br><br><b>Notes</b><br>LED placed on the lower element.<br>Small |                                          |
| 7750 |  | <b>Finishes</b><br>● 59/ __ Mink<br>(PANTONE 407)<br>● 93/ __ White<br>(RAL 9003)                                                                                                                                                    | <b>LED temperature colour</b><br>/1_ 2700 K<br>CRI >90 1269 lm 141 lm/W                                                                                                        | <b>Control</b><br>7750 __ / _ 2<br>0-10V |
|      |  | <b>Materials</b><br>Body: Aluminum. Diffuser: Borosilicate glass.<br>Reflector body: Foamed PVC. Lid: Polycarbonate.<br><br><b>Light Source and electronics</b><br>1 x LED 9 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz | <b>Packaging</b><br>1 Box 0,15 x 0,132 x 0,36 m<br>Vol 0,0071 m³<br>Gross weight 0,95 Kg Net weight 0,8 Kg<br><br><b>Notes</b><br>LED placed on the lower element.<br>Small    |                                          |
| 7751 |  | <b>Finishes</b><br>● 59/ __ Mink<br>(PANTONE 407)<br>● 93/ __ White<br>(RAL 9003)                                                                                                                                                    | <b>LED temperature colour</b><br>/1_ 2700 K<br>CRI >90 1269 lm 141 lm/W                                                                                                        | <b>Control</b><br>7751 __ / _ 2<br>0-10V |
|      |  | <b>Materials</b><br>Body: Aluminum. Diffuser: Borosilicate glass.<br>Reflector body: Foamed PVC. Lid: Polycarbonate.<br><br><b>Light Source and electronics</b><br>1 x LED 9 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz | <b>Packaging</b><br>1 Box 0,15 x 0,132 x 0,36 m<br>Vol 0,0071 m³<br>Gross weight 1,25 Kg Net weight 1,1 Kg<br><br><b>Notes</b><br>LED placed on the lower element.<br>Small    |                                          |
| 7752 |  | <b>Finishes</b><br>● 59/ __ Mink<br>(PANTONE 407)<br>● 93/ __ White<br>(RAL 9003)                                                                                                                                                    | <b>LED temperature colour</b><br>/1_ 2700 K<br>CRI >90 1269 lm 141 lm/W                                                                                                        | <b>Control</b><br>7752 __ / _ 2<br>0-10V |
|      |  | <b>Materials</b><br>Body: Aluminum. Diffuser: Borosilicate glass.<br>Reflector body: Foamed PVC. Lid: Polycarbonate.<br><br><b>Light Source and electronics</b><br>1 x LED 9 W 350 mA<br>Constant Current 350 mA<br>100~240V 50/60Hz | <b>Packaging</b><br>1 Box 0,15 x 0,132 x 0,36 m<br>Vol 0,0071 m³<br>Gross weight 1,6 Kg Net weight 1,4 Kg<br><br><b>Notes</b><br>LED placed on the lower element.<br>Small     |                                          |

## 7753



| Finishes                      | LED temperature colour               |
|-------------------------------|--------------------------------------|
| ● 59/ _ Mink<br>(PANTONE 407) | /1_ 2700 K  CRI >90 1269 lm 141 lm/W |
| ● 93/ _ White<br>(RAL 9003)   |                                      |

| Control               |
|-----------------------|
| 7753 _ / _ 2<br>0-10V |

**Materials**  
Body: Aluminum. Diffuser: Borosilicate glass.  
Reflector body: Foamed PVC. Lid: Polycarbonate.


**Light Source and electronics**  
1 x LED 9 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,15 x 0,193 x 0,36 m  
Vol 0,0100 m<sup>3</sup>  
Gross weight 2 Kg Net weight 1,5 Kg

**Notes**  
LED placed on the lower element.  
Small



## 7759



| Finishes                      | LED temperature colour               |
|-------------------------------|--------------------------------------|
| ● 59/ _ Mink<br>(PANTONE 407) | /1_ 2700 K  CRI >90 1269 lm 141 lm/W |
| ● 93/ _ White<br>(RAL 9003)   |                                      |

| Control               |
|-----------------------|
| 7759 _ / _ 2<br>0-10V |

**Materials**  
Body: Aluminum. Diffuser: Borosilicate glass.  
Lid: Polycarbonate.


**Light Source and electronics**  
1 x LED 9 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,065 x 0,145 x 0,275 m  
Vol 0,0026 m<sup>3</sup>  
Gross weight 0,75 Kg Net weight 0,6 Kg

**Notes**  
LED placed on the lower element.  
Big



## 7760



| Finishes                      | LED temperature colour               |
|-------------------------------|--------------------------------------|
| ● 59/ _ Mink<br>(PANTONE 407) | /1_ 2700 K  CRI >90 1269 lm 141 lm/W |
| ● 93/ _ White<br>(RAL 9003)   |                                      |

| Control               |
|-----------------------|
| 7760 _ / _ 2<br>0-10V |

**Materials**  
Body: Aluminum. Diffuser: Borosilicate glass.  
Reflector body: Foamed PVC. Lid: Polycarbonate.


**Light Source and electronics**  
1 x LED 9 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,15 x 0,132 x 0,36 m  
Vol 0,0071 m<sup>3</sup>  
Gross weight 1,4 Kg Net weight 1,1 Kg

**Notes**  
LED placed on the lower element.  
Big



## 7761



| Finishes                      | LED temperature colour               |
|-------------------------------|--------------------------------------|
| ● 59/ _ Mink<br>(PANTONE 407) | /1_ 2700 K  CRI >90 1269 lm 141 lm/W |
| ● 93/ _ White<br>(RAL 9003)   |                                      |

| Control               |
|-----------------------|
| 7761 _ / _ 2<br>0-10V |


**Materials**  
Body: Aluminum. Diffuser: Borosilicate glass.  
Reflector body: Foamed PVC. Lid: Polycarbonate.

**Light Source and electronics**  
1 x LED 9 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,15 x 0,132 x 0,36 m  
Vol 0,0071 m<sup>3</sup>  
Gross weight 1,5 Kg Net weight 1,2 Kg

**Notes**  
LED placed on the lower element.  
Big



|                                                                                                   |                                                                                                                                      |
|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <div>7762</div>  | <div>Finishes</div> <div><div><div></div></div>59/ __ Mink<br/>(PANTONE 407)</div> <div><div></div></div> 93/ __ White<br>(RAL 9003) |
|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|



# Alpha

Design by Ramos & Bassols

An embedded light breaking free to serve.

## Wall



ø 10,5 cm

7920



8 cm

7925



5 cm

7930



10,5 cm

7935



12 x 12 cm

7940 7942\*



24 cm


7955



14 x 24 cm

7950

### 7920



- Finishes**
- **03/** \_ \_ White and chrome (RAL 9016)
  - **04/** \_ \_ Black and chrome (RAL 9005)
  - **18/** \_ \_ Graphite and black (RAL 7016)
  - **93/** \_ \_ White (RAL 9016)

**LED temperature colour**  
/1\_ 2700 K   
CRI >90 181,2 lm 86 lm/W

**Control**  
**7920** \_ \_ / \_ 0  
On/ Off

**Materials**  
Box: Zamak. Diffuser: Polycarbonate.  
Lid: Steel.


**Light Source and electronics**  
1x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

**Packaging**  
1 Box 0,13 x 0,20 x 0,21 m  
Vol 0,0055 m³  
Gross weight 1 Kg Net weight 0,444 Kg

**Notes**  
Surface



## 7925



|                                                                                                                                                                                                                     |                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| Finishes                                                                                                                                                                                                            | LED temperature colour                  |
| <ul style="list-style-type: none"> <li>03/ _ _ White and chrome (RAL 9016)</li> <li>04/ _ _ Black and chrome (RAL 9005)</li> <li>18/ _ _ Graphite and black (RAL 7016)</li> <li>93/ _ _ White (RAL 9016)</li> </ul> | /1 _ 2700 K<br>CRI >90 181,2 lm 86 lm/W |

Control  
7925 \_ \_ / \_ 0  
On/ Off

Materials  
Box: Zamak. Diffuser: Polycarbonate.  
Lid: Steel.


Light Source and electronics  
1 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging  
1 Box 0,13 x 0,21 x 0,20 m  
Vol 0,0055 m<sup>3</sup>  
Gross weight 1 Kg Net weight 0,32 Kg

Notes  
Surface



## 7930



|                                                                                                                                                                                                                     |                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| Finishes                                                                                                                                                                                                            | LED temperature colour                  |
| <ul style="list-style-type: none"> <li>03/ _ _ White and chrome (RAL 9016)</li> <li>04/ _ _ Black and chrome (RAL 9005)</li> <li>18/ _ _ Graphite and black (RAL 7016)</li> <li>93/ _ _ White (RAL 9016)</li> </ul> | /1 _ 2700 K<br>CRI >90 181,2 lm 86 lm/W |

Control  
7930 \_ \_ / \_ 0  
On/ Off

Materials  
Box: Zamak. Diffuser: Polycarbonate.  
Lid: Steel.


Light Source and electronics  
2 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging  
1 Box 0,13 x 0,20 x 0,21 m  
Vol 0,0055 m<sup>3</sup>  
Gross weight 0,9 Kg Net weight 0,3 Kg

Notes  
Surface



## 7935



|                                                                                                                                                                                                                     |                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| Finishes                                                                                                                                                                                                            | LED temperature colour                  |
| <ul style="list-style-type: none"> <li>03/ _ _ White and chrome (RAL 9016)</li> <li>04/ _ _ Black and chrome (RAL 9005)</li> <li>18/ _ _ Graphite and black (RAL 7016)</li> <li>93/ _ _ White (RAL 9016)</li> </ul> | /1 _ 2700 K<br>CRI >90 362,4 lm 86 lm/W |

Control  
7935 \_ \_ / \_ 0  
On/ Off


Materials  
Box: Zamak. Diffuser: Polycarbonate.  
Lid: Steel.

Light Source and electronics  
2 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz

Packaging  
1 Box 0,13 x 0,20 x 0,21 m  
Vol 0,0055 m<sup>3</sup>  
Gross weight 0,9 Kg Net weight 0,3 Kg

Notes  
Surface



|                                                                                                              |                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>7940</div> <div></div> | <div>Finishes</div> <div><div><div></div>03/ _ _ White and chrome (RAL 9016)</div><div><div></div>04/ _ _ Black and chrome (RAL 9005)</div><div><div></div>18/ _ _ Graphite and black (RAL 7016)</div><div><div></div>93/ _ _ White (RAL 9016)</div></div> |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|




7950

Finishes  
 03/ \_ \_ White  
 (RAL 9016)  
 04/ \_ \_ Black  
 (RAL 9005)

LED temperature colour  
 /1\_ 2700 K   
 CRI >90 543,6 lm 86 lm/W

Control  
 7950 \_ \_ / \_ 0  
 On/ Off



#### Materials

Diffuser: Polycarbonate. Lid: Zamak.  
 Body: Aluminum. Lid: Aluminum.

#### Light Source and electronics

3 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 100~240V 50/60Hz

#### Packaging

1 Box 0,26 x 0,26 x 0,26 m  
 Vol 0,0175 m<sup>3</sup>  
 Gross weight 1,56 Kg Net weight 0,65 Kg

#### Notes

Surface  
 Light beam with no IR and UV


LED IP20 CE EAC Bi-volt

7955

03/ \_ \_ White  
 (RAL 9016)  
 04/ \_ \_ Black  
 (RAL 9005)

LED temperature colour  
 /1\_ 2700 K   
 CRI >90 543,6 lm 86 lm/W

Control  
 7955 \_ \_ / \_ 0  
 On/ Off



#### Materials

Diffuser: Polycarbonate. Lid: Zamak.  
 Body: Aluminum. Lid: Aluminum.

#### Light Source and electronics

3 x LED 2,1 W 700 mA  
 Constant Current 700 mA  
 100~240V 50/60Hz

#### Packaging

1 Box 0,23 x 0,37 x 0,37 m  
 Vol 0,0310 m<sup>3</sup>  
 Gross weight 0,97 Kg Net weight 0,47 Kg

#### Notes

Surface  
 Light beam with no IR and UV

LED IP20 CE EAC Bi-volt



# Domo

Design by Ramos & Bassols

Featuring a classic cylinder silhouette, Domo offers refined lighting effect, combining diffusion and reflection. The understated, LED-powered fixture has clean lines and a spherical shape that seamlessly blends into the ceiling architecture.

## Ceiling

8200

ø 18,5 cm



8201

ø 18,5 cm



8210

ø 18,5 cm



8200

Finishes

● 03/ \_ \_ White  
(RAL 9010)


LED temperature colour

/1 \_ 2700 K  CRI >90 543,66 lm 86 lm/W  
/2 \_ 3000 K  CRI >90 489,6 lm 78 lm/W  
/3 \_ 3500 K  CRI >90 393,6 lm 62,5 lm/W

Control

8200 \_ \_ / \_ 0  
On / Off

8200 \_ \_ / \_ 2  
0-10V



Materials

Diffuser: Polycarbonate.  
Body: Aluminum.

Light Source and electronics

3 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz  
/ \_ 0: On/Off, 100~240V Bi-volt  
/ \_ 2: 0-10V, 100~277V Multi-volt

Packaging

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0170 m³  
Gross weight 1,7 Kg Net weight 1,2 Kg

Notes

Surface fitting

8201

Finishes

● 03/ \_ \_ White  
(RAL 9010)


LED temperature colour

/1 \_ 2700 K  CRI >90 543,66 lm 86 lm/W  
/2 \_ 3000 K  CRI >90 489,6 lm 78 lm/W  
/3 \_ 3500 K  CRI >90 393,6 lm 62,5 lm/W

Control

8201 \_ \_ / \_ 0  
On / Off

8201 \_ \_ / \_ 2  
0-10V



Materials

Diffuser: Polycarbonate.  
Body: Aluminum.

Light Source and electronics

3 x LED 2,1 W 700 mA  
Constant Current 700 mA  
100~240V 50/60Hz  
/ \_ 0: On/Off, 100~240V Bi-volt  
/ \_ 2: 0-10V, 100~277V Multi-volt

Packaging

1 Box 0,26 x 0,26 x 0,26 m  
Vol 0,0170 m³  
Gross weight 1,6 Kg Net weight 1,1 Kg

Notes

Surface fitting




# 45°


Design by Víctor Carrasco

45° fixture features a customised composition of vertical tubes that create a sculptural effect overhead. Suspended from the ceiling like sleek stalagmites, they create an array of glowing accent lighting points.

## Ceiling

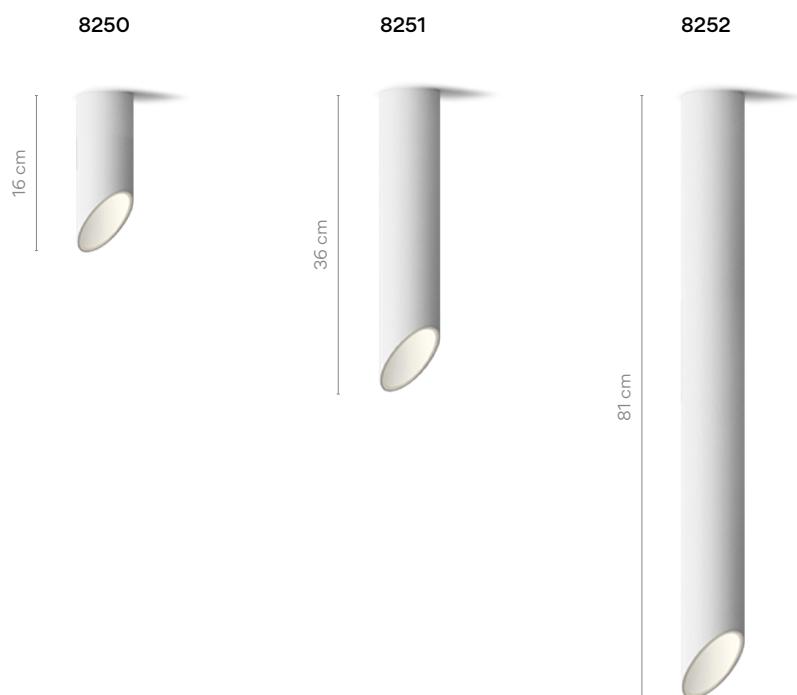

### 8250



#### Finishes

- **03/** \_ \_ White (RAL 9016)
- **04/** \_ \_ Black (RAL 9005)

#### LED temperature colour

- /1 \_ 2700 K **E** CRI >90 1352,27 lm 101 lm/W
- /2 \_ 3000 K **E** CRI >90 662 lm 49 lm/W
- /3 \_ 3500 K **F** CRI >90 1463,02 lm 109,18 lm/W

#### Control

- 8250** \_ \_ / \_ 3 1-10V
- 8250** \_ \_ / \_ 5 Push

#### Finishes

- **52/** \_ \_ Black oxide (Satin bronze)

#### LED temperature colour

- /1 \_ 2700 K **E** CRI >90 1352,27 lm 101 lm/W
- /2 \_ 3000 K **E** CRI >90 662 lm 49 lm/W
- /3 \_ 3500 K **F** CRI >90 1463,02 lm 109,18 lm/W

#### Control

- 8250** \_ \_ / \_ 3 1-10V
- 8250** \_ \_ / \_ 5 Push

#### Materials

Diffuser: Polycarbonate.  
Tube: Aluminum.

#### Light Source and electronics

1 x LED 6,1 W 350 mA  
Constant Current 350 mA  
230V 50Hz

#### Packaging

1 Box 0,21 x 0,21 x 0,48 m  
Vol 0,0211 m³  
Gross weight 2,1 Kg Net weight 1,15 Kg


#### Notes

Surface fitting.  
It includes interchangeable diffusers, mink or orange finishes

LED IP20 CE EAC



## 8251



**Finishes**  
**03/** \_ \_ White  
(RAL 9016)  
**04/** \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
**/1** \_ 2700 K **E**   
CRI >90 1352,27 lm 101 lm/W  
**/2** \_ 3000 K **E**   
CRI >90 662 lm 49 lm/W  
**/3** \_ 3500 K **F**   
CRI >90 1463,02 lm 109,18 lm/W

**Control**  
**8251** \_ \_ / \_ **B**  
1-10V, Push  
**8251** \_ \_ / \_ **1**  
DALI

**Finishes**  
**52/** \_ \_ Black oxide  
(Satin bronze)

**LED temperature colour**  
**/1** \_ 2700 K **E**   
CRI >90 1352,27 lm 101 lm/W  
**/2** \_ 3000 K **E**   
CRI >90 662 lm 49 lm/W  
**/3** \_ 3500 K **F**   
CRI >90 1463,02 lm 109,18 lm/W

**Control**  
**8251** \_ \_ / \_ **B**  
1-10V, Push  
**8251** \_ \_ / \_ **1**  
DALI

**Materials**  
Diffuser: Polycarbonate.  
Tube: Aluminum.


**Light Source and electronics**  
1 x LED 6,1 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

**Packaging**  
1 Box 0,21 x 0,21 x 0,48 m  
Vol 0,0326 m<sup>3</sup>  
Gross weight 2,9 Kg Net weight 1,95 Kg

**Notes**  
Surface fitting.  
It includes interchangeable diffusers,  
mink or orange finishes

LED IP20 EAC Bi-volt

## 8252



**Finishes**  
**03/** \_ \_ White  
(RAL 9016)  
**04/** \_ \_ Black  
(RAL 9005)

**LED temperature colour**  
**/1** \_ 2700 K **E**   
CRI >90 1352,3 lm 101 lm/W  
**/2** \_ 3000 K **E**   
CRI >90 662 lm 49 lm/W  
**/3** \_ 3500 K **F**   
CRI >90 1463,02 lm 109,18 lm/W

**Control**  
**8252** \_ \_ / \_ **B**  
1-10V, Push  
**8252** \_ \_ / \_ **1**  
DALI

**Finishes**  
**52/** \_ \_ Black oxide  
(Satin bronze)

**LED temperature colour**  
**/1** \_ 2700 K **E**   
CRI >90 1352,3 lm 101 lm/W  
**/2** \_ 3000 K **E**   
CRI >90 662 lm 49 lm/W  
**/3** \_ 3500 K **F**   
CRI >90 1463,02 lm 109,18 lm/W

**Control**  
**8252** \_ \_ / \_ **B**  
1-10V, Push  
**8252** \_ \_ / \_ **1**  
DALI

**Materials**  
Diffuser: Polycarbonate.  
Tube: Aluminum.

**Light Source and electronics**  
1 x LED 6,1 W 350 mA  
Constant Current 350 mA  
110~240V 50/60Hz

**Packaging**  
1 Box 0,19 x 0,13 x 1,265 m  
Vol 0,0312 m<sup>3</sup>  
Gross weight 6,25 Kg Net weight 4,75 Kg



**Notes**  
Surface fitting.  
It includes interchangeable diffusers,  
mink or orange finishes

LED IP20 EAC Bi-volt

# Match

Design by Jordi Vilardell & Meritxell Vidal

Based on the principle of co-creation, Match is a lighting collection that can be fully customised virtually. Sculptural light structures arranged chaotically and adapted to fit into the room and the space available.

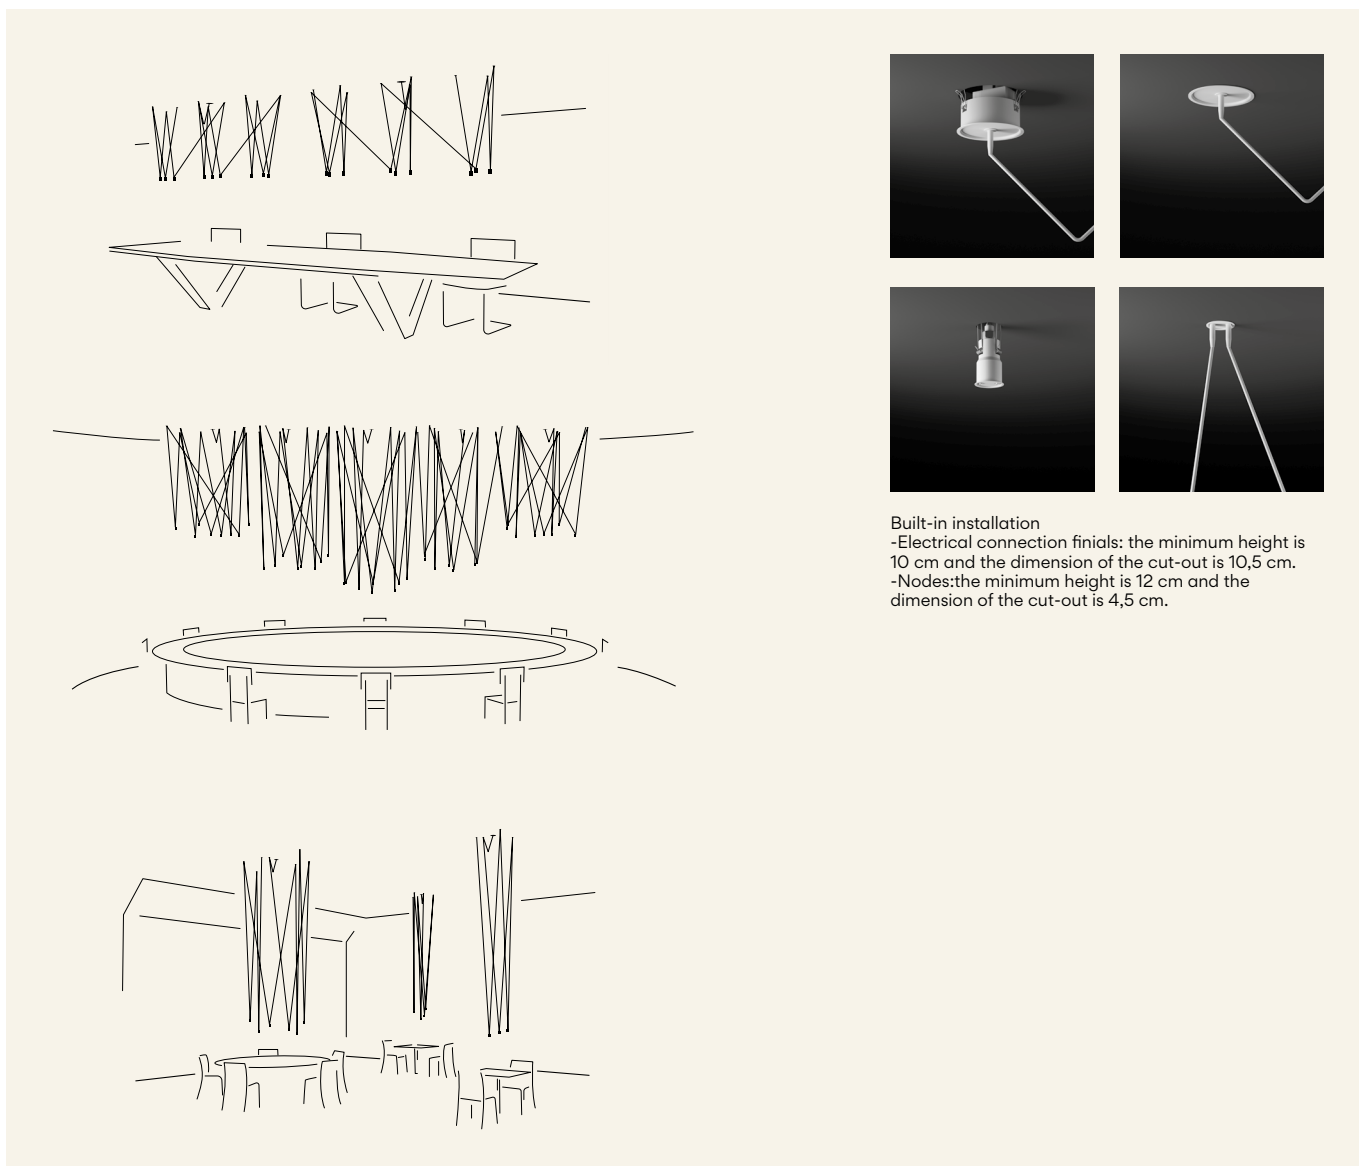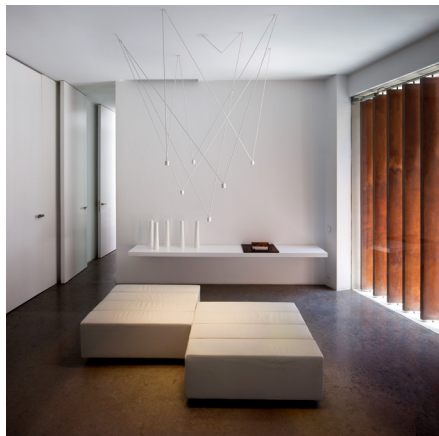

Built-in installation  
-Electrical connection finials: the minimum height is 10 cm and the dimension of the cut-out is 10,5 cm.  
-Nodes: the minimum height is 12 cm and the dimension of the cut-out is 4,5 cm.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.


Personalise your own  
Match composition  
quick and easy at  
[vibia.com](http://vibia.com)

**It's necessary  
to make your  
personalized  
configuration  
on [vibia.com](http://vibia.com) to  
see prices and  
place orders.**


Example 1:




Example 2:




Example 3:




Example 4:



Example 5:



Example 6:



#### Finishes

- **03/** \_ \_ White  
(RAL 9010)
- **18/** \_ \_ Graphite  
(RAL 7016)

#### LED temperature colour

- /1\_ 2700 K **G**
- CRI >80 199 lm 95 lm/W

#### Control

- A**  
DALI-2, 1-10V, Push
- Z**  
Casambi

#### Materials

Head: Aluminum. Canopy Plate: Steel.  
Rods: Steel.

#### Light Source and electronics

LED 2,1 W 700 mA  
Constant Current 700 mA  
110~240V 50/60Hz

#### Notes

Built-in

**LED** **IP20** **CE** **EAC** **Bi-volt**

ø 4,5 cm ø 10,5 cm

**PLACE ORDER ONLINE AT [WWW.VIBIA.COM](http://WWW.VIBIA.COM)**







# Bulbs

| LED     |                                      |                                                                                   | Fluorescent tube |                      |                                                                                     |
|---------|--------------------------------------|-----------------------------------------------------------------------------------|------------------|----------------------|-------------------------------------------------------------------------------------|
| 900018. | LED G9 4,2W 2700K 470 lm.            |  | 900027.          | G5 230V 24W (T5)     |  |
| 900100. | LED G9 230V 3,8W LED 2700 K 470 lm   |  | 900028.          | G5 230V 39W (T5)     |  |
| 900102. | LED E27 230V 12W LED 2700 K 1520 lm  |  | 900035.          | 2GX13 230V 55W (T5C) |  |
| 900103. | LED E27 230V 9W 2700 K 800 lm        |  | 900070.          | 2GX13 230V 40W (T5C) |  |
| 900105. | LED E27 PAR30 230V 10W 2700 K 630 lm |  | 900071.          | 2GX13 230V 22W (T5C) |  |
| 900106. | LED E14 230V 7W LED 2700 K 800 lm.   |  | 900072.          | 2GX13 230V 60W (T5C) |  |

Bulbs: net prices, without discount



# Professional area at vibia.com

## A new way of Working


We believe in cooperation and we bring you new ways to collaborate and online tools at [vibia.com](http://vibia.com) that we will help to work together efficiently. We propose a new way of working to have successful lighting projects.

Download all the information you need


Download and export all product information you need for your projects in one click:



Spec sheet




2D, 3D




Photometry




HD images

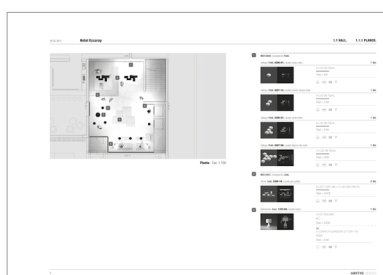


Project report



Budgets



Product  
configuration  
spec sheet



Installation  
instructions

# Glossary

## CE

Product complying with the EN60598-1 and EN60598-2-1 European regulation.



Product complying with TP TC 004/2011 and TP TC 020/2011. Custom Union Regulation



Product that complies with the law N24-09 of the current Moroccan legislation.

## IP

Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids. The scale goes from IP20 to IP68.



Product protected against solid object as big as or bigger than 12 mm. No protection against water.



Dust-tight product. Protected against water spray.



Dust-tight product. Protected against water trickles.



Dust-tight product. Protected against water spurts.

## Insulation class



Class I. Product with an additional protection cable (grounds).



Class II. Product protected against electric shock having a double insulation. No grounds.



Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

## Flammable surfaces



Product suitable to be installed on any kind of surface (EN 60598).



Product that **CANNOT** be in contact with normally-flammable materials (wood or others).



Valid for the range 110V-230V, 50-60Hz.



Valid for the range 110-277V, 50-60Hz.



Contains lithium-ion battery. Li-Ion battery must be disposed of into label containers, returned to special waste collection points or retailers of electrical equipment.

## Cut out



Property for embedding dimension.

## No electronic equipment included



The lamp does not include any electronic equipment (transformer, driver, ballast...).

## Integrated Dimmer



Lamp that has a integrated dimmer.

## EU Energetic label

More Efficacy



Less Efficacy

## Light source information

CRI

Colour rendering index.

K

Colour temperature.

lm

Lumen, unit of measurement of luminous flux.

lm/W


Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.




LED included.

# Lighting control systems


## 1 Push control

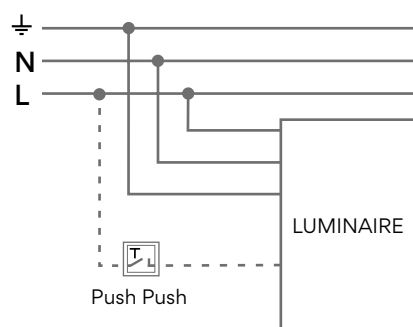


## 2 1-10V System control

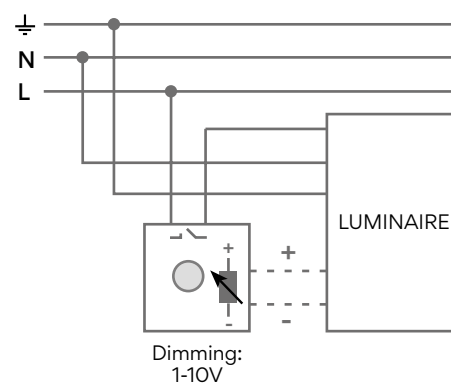



## 3 DALI System control

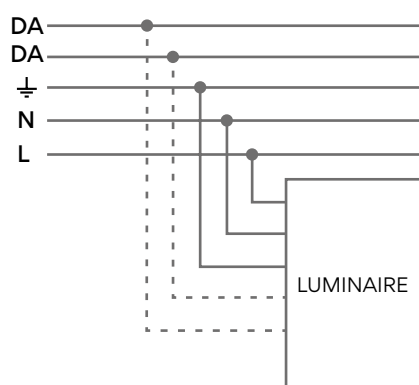

## 4 Casambi control

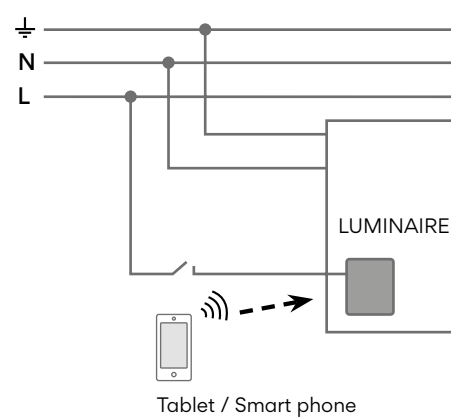

## 5 TRIAC control

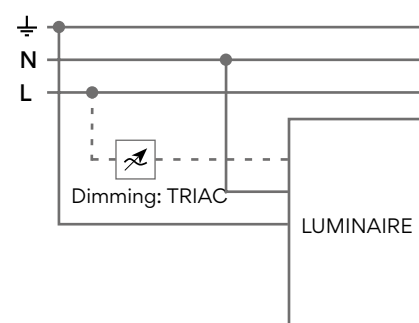

**Very important**

Vibia Lighting S.L.U. has the right to change any model or finish of the products included in the picture catalogue without any previous notice.

Vibia Lighting, S.L.U.

**Office**

Progrés 4-6.

08850 Gavà (Barcelona).

International Tel +34 934 796 971.

[customer.service@vibia.com](mailto:customer.service@vibia.com)

[vibia.com](http://vibia.com)

COPYRIGHT© VIBIA LIGHTING S.L.U. ALL RIGHTS RESERVED.



